
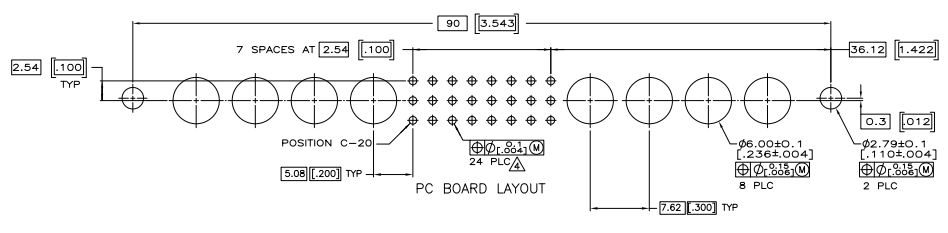


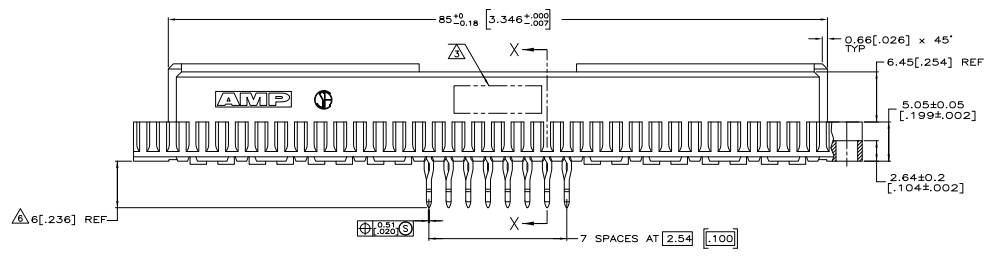


REVOLUTIONS		DATE	BY	APP
AD	25			

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ CONTACT MATERIAL: COPPER ALLOY.
- △ PART NUMBER AND DATE CODE IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD, RECOMMENDED PC BOARD DRILLED HOLES ARE Ø1.151[.025][.0453R.0010] WITH 0.02-0.08[.001-0.003] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING, FINISHED HOLES AFTER PLATING Ø1.02±.08[.040±.003].
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA, TIN PLATE ON POSTS.
- △ TAIL LENGTH AFTER SEATED IN PC BOARD.
- △ CONTACT POINT AFTER SEATED IN PC BOARD.
- △ MARKING ON THIS SIDE.

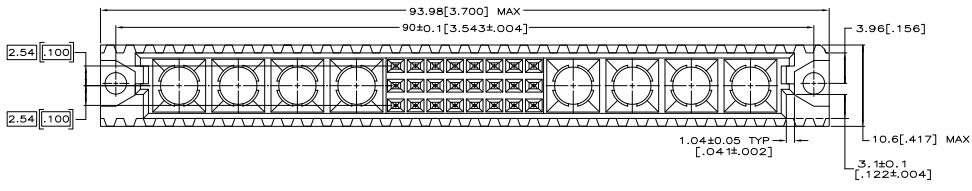

5148384-5
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT		REV. POLYCHROME	DATE	REV. POLYCHROME	DATE
DATE	REV.	DATE	REV.	DATE	REV.
01	01	01	01	01	01
CUSTOMER DRAWING		TITL			