



**NPN Silicon Digital Transistor**


- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1=10k\Omega$ )
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

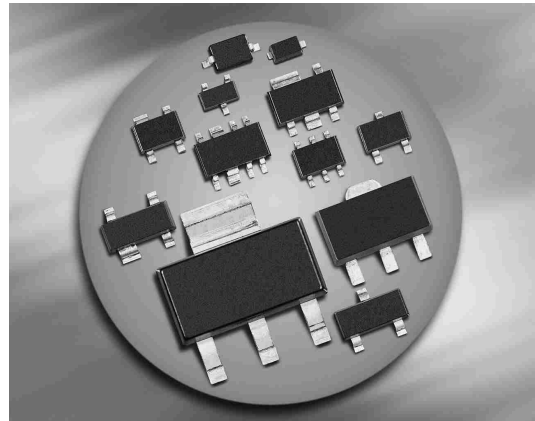

**BCR129/F/L3  
BCR129T/W**



**BCR129S  
SEM4**



Type	Marking	Pin Configuration						Package
BCR129	WVs	1=B	2=E	3=C	-	-	-	SOT23
BCR129F	WVs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR129L3	WV	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR129S	WVs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR129T	WVs	1=B	2=E	3=C	-	-	-	SC75
BCR129W	WVs	1=B	2=E	3=C	-	-	-	SOT323
SEM4	WV	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT666

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	50	V
Collector-base voltage	$V_{CBO}$	50	
Emitter-base voltage	$V_{EBO}$	5	
Input on voltage	$V_{i(on)}$	20	
Collector current	$I_C$	100	mA
Total power dissipation- BCR129, $T_S \leq 102^\circ\text{C}$ BCR129F, $T_S \leq 128^\circ\text{C}$ BCR129L3, $T_S \leq 135^\circ\text{C}$ BCR129S, $T_S \leq 115^\circ\text{C}$ BCR129T, $T_S \leq 109^\circ\text{C}$ BCR129W, $T_S \leq 124^\circ\text{C}$ SEM4, $T_S \leq 75^\circ\text{C}$	$P_{tot}$	200 250 250 250 250 250 250	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-65 ... 150	

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup>	$R_{thJS}$		K/W
BCR129		$\leq 240$	
BCR129F		$\leq 90$	
BCR129L3		$\leq 60$	
BCR129S		$\leq 140$	
BCR129T		$\leq 165$	
BCR129W		$\leq 105$	
SEM4		$\leq 300$	

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(BR)CEO}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{V}, I_E = 0$	$I_{CBO}$	-	-	100	nA
DC current gain <sup>1)</sup> $I_C = 5 \text{mA}, V_{CE} = 5 \text{V}$	$h_{FE}$	120	-	630	-
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 10 \text{mA}, I_B = 0.5 \text{mA}$	$V_{CEsat}$	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{V}$	$V_{i(off)}$	0.4	-	1	
Input on voltage $I_C = 2 \text{mA}, V_{CE} = 0.3 \text{V}$	$V_{i(on)}$	0.5	-	1.1	
Input resistor	$R_1$	7	10	13	k $\Omega$
<b>AC Characteristics</b>					
Transition frequency $I_C = 10 \text{mA}, V_{CE} = 5 \text{V}, f = 100 \text{MHz}$	$f_T$	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{V}, f = 1 \text{MHz}$	$C_{cb}$	-	3	-	pF

<sup>1</sup>Pulse test:  $t < 300\mu\text{s}$ ;  $D < 2\%$


**DC current gain  $h_{FE} = f(I_C)$**

$V_{CE} = 5\text{ V}$  (common emitter configuration)

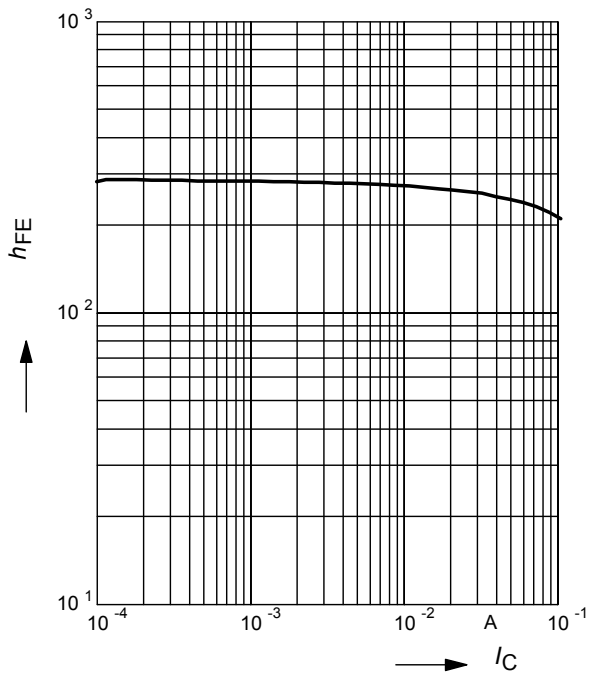


**Collector-emitter saturation voltage**

$V_{CEsat} = f(I_C), h_{FE} = 20$

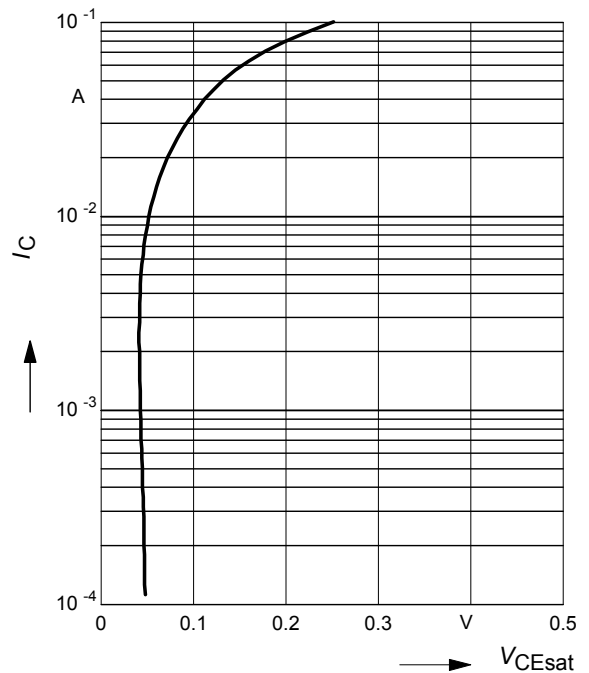


**Input on Voltage  $V_{i(on)} = f(I_C)$**

$V_{CE} = 0.3\text{ V}$  (common emitter configuration)

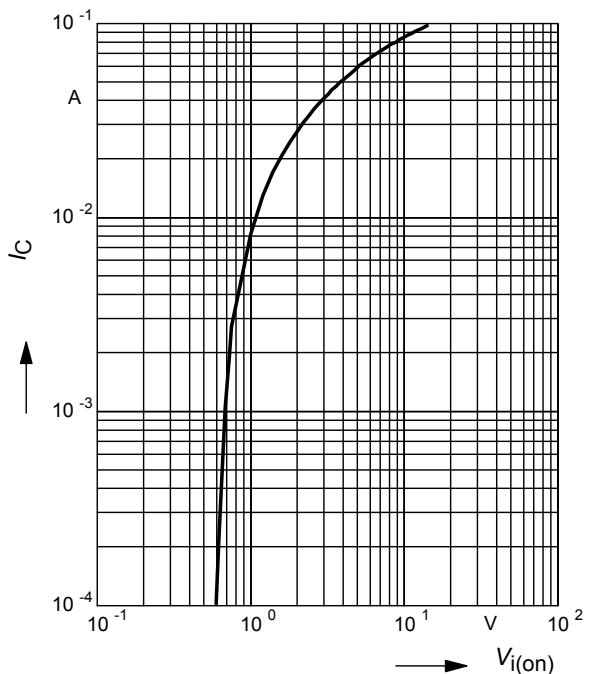


**Input off voltage  $V_{i(off)} = f(I_C)$**


$V_{CE} = 5\text{ V}$  (common emitter configuration)

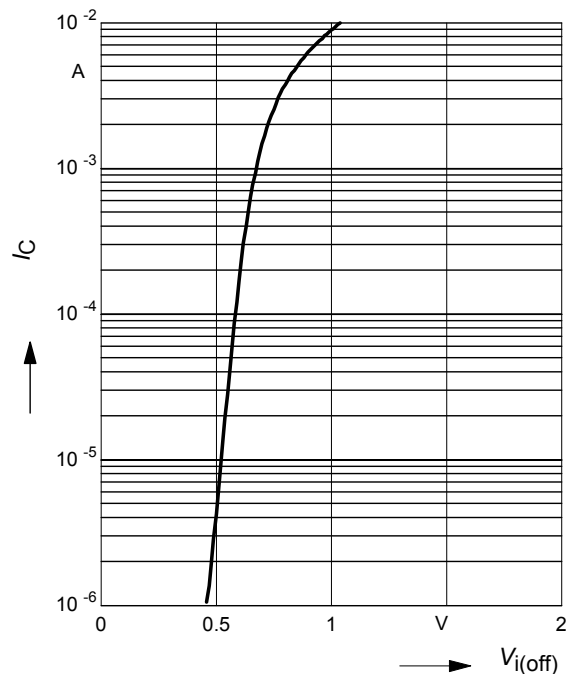


**Total power dissipation  $P_{tot} = f(T_S)$**

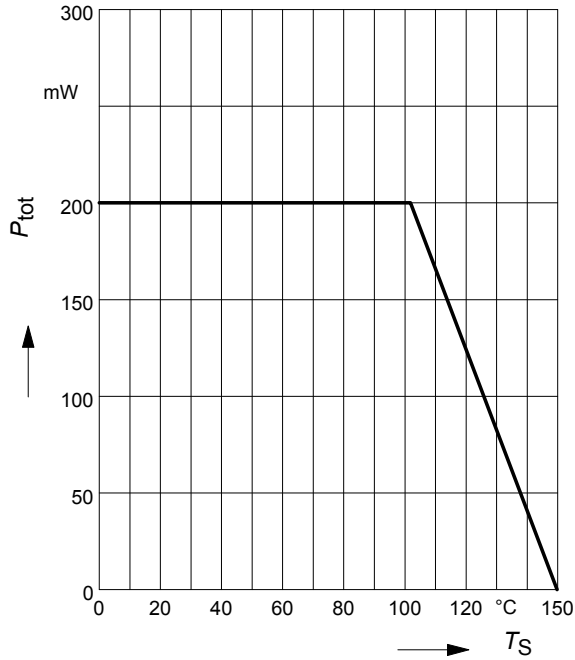


**Total power dissipation  $P_{tot} = f(T_S)$**   
**BCR129F**

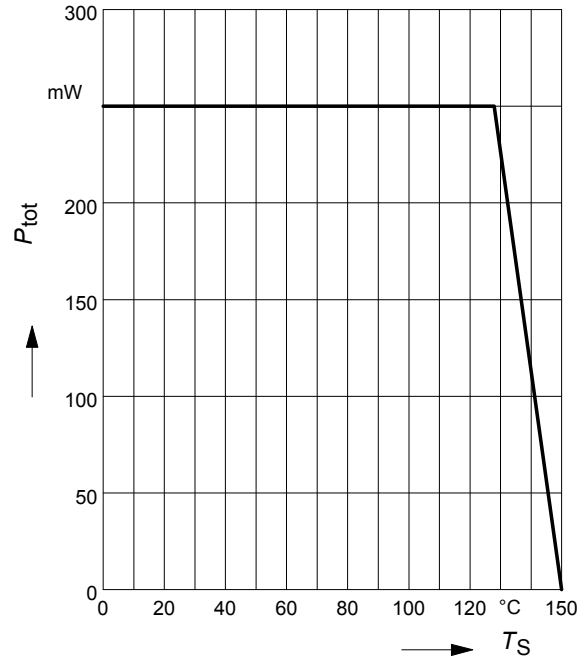

**Total power dissipation  $P_{tot} = f(T_S)$**   
**BCR129L3**

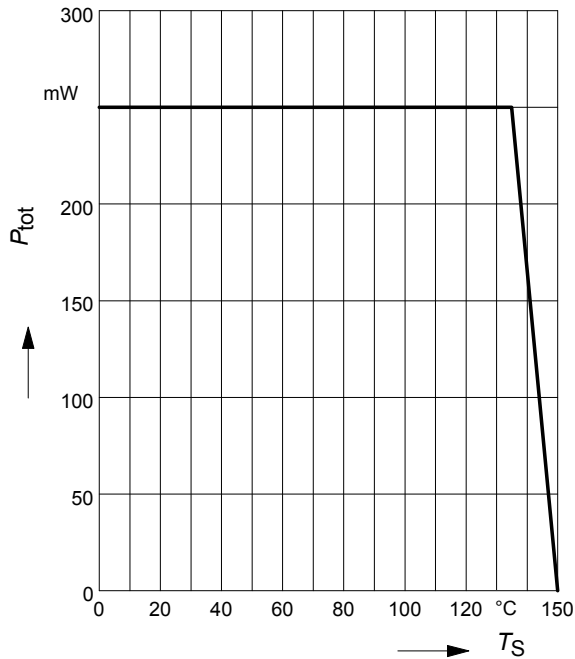


**Total power dissipation  $P_{tot} = f(T_S)$**   
**BCR129S**

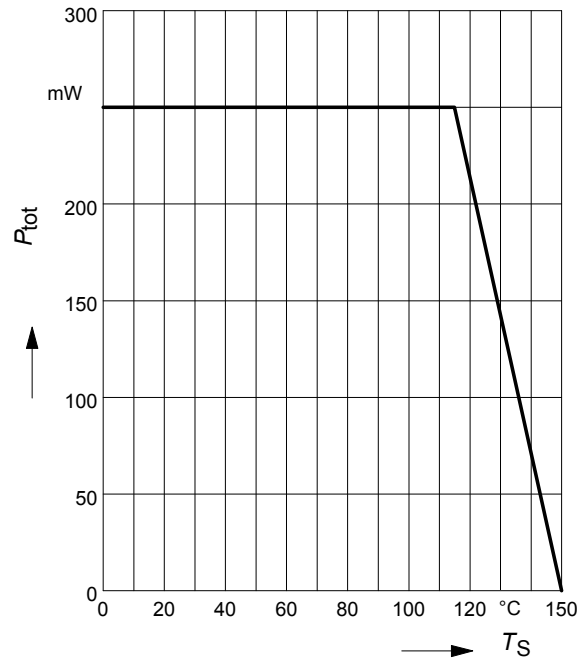


**Total power dissipation  $P_{tot} = f(T_S)$**

BCR129T

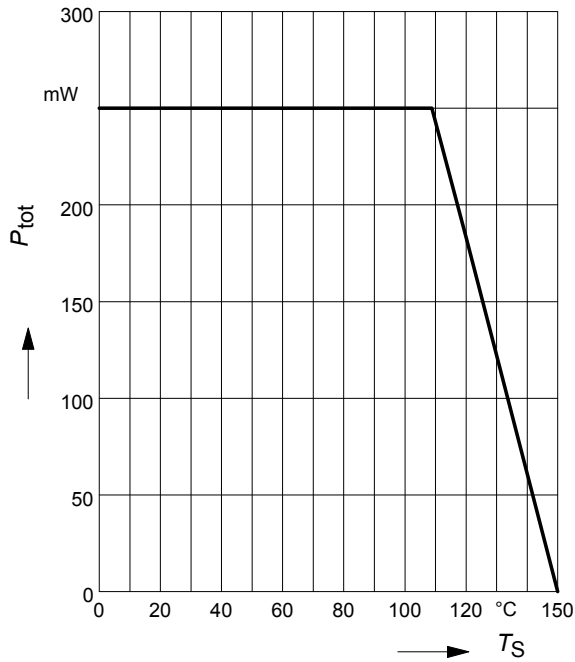


**Total power dissipation  $P_{tot} = f(T_S)$**

BCR129W

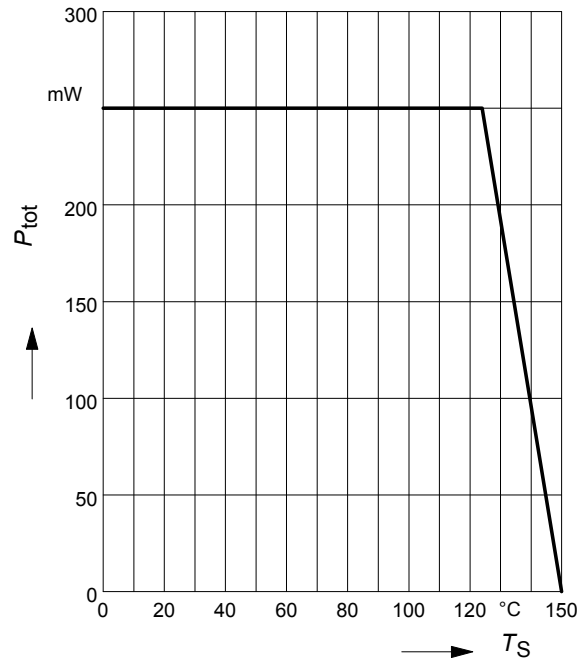


**Total power dissipation  $P_{tot} = f(T_S)$**

SEM4

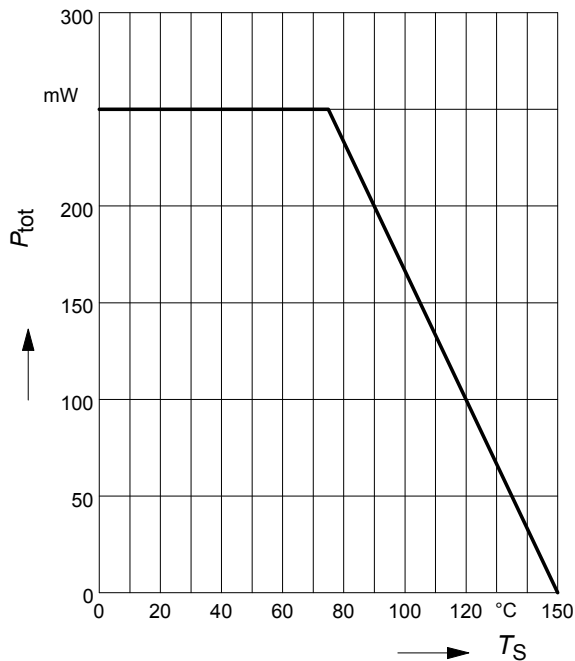

Permissible Pulse Load  $R_{thJS} = f(t_p)$


BCR129

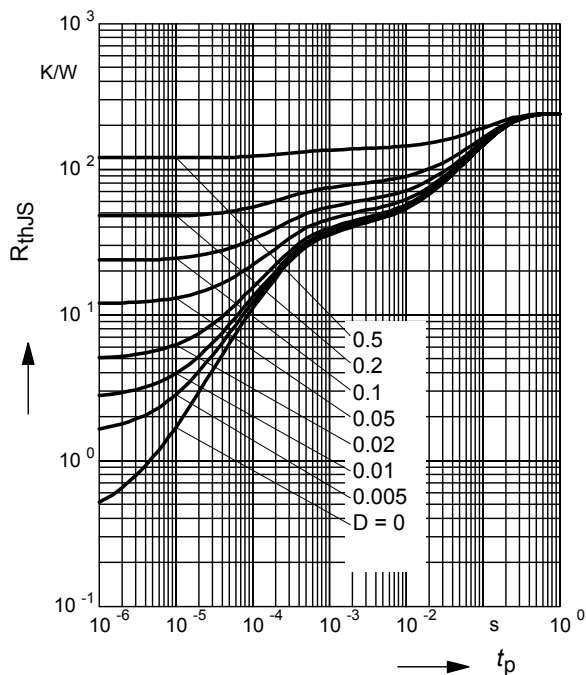

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129

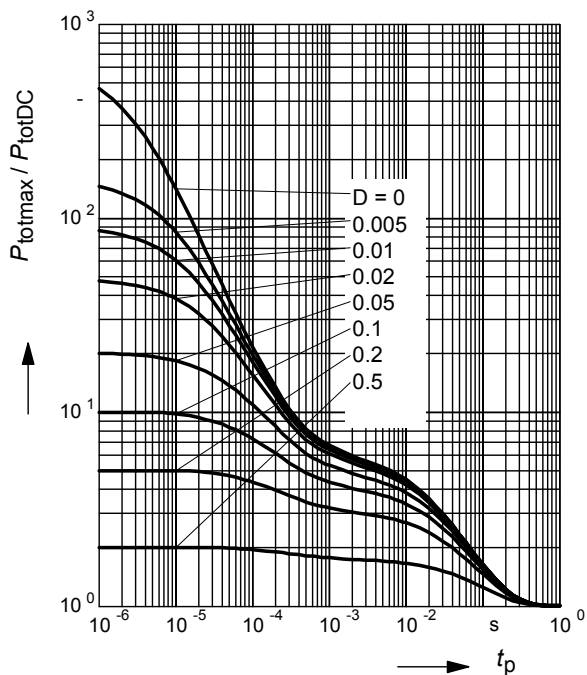

Permissible Puls Load  $R_{thJS} = f(t_p)$


BCR129F

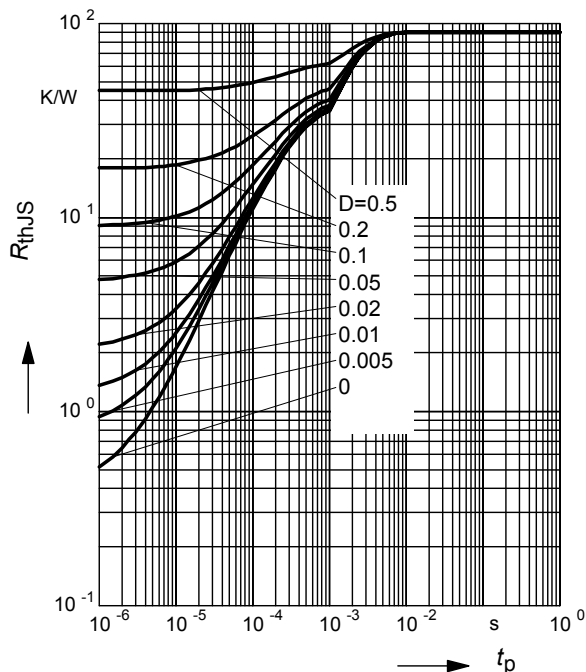

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129F

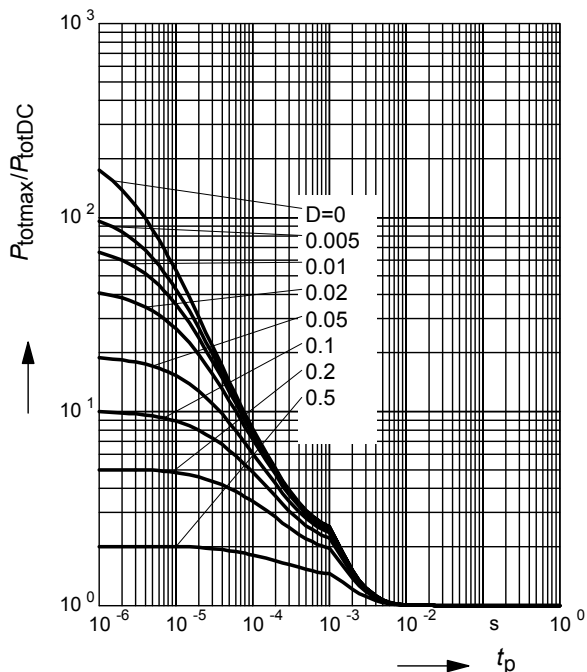

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129L3

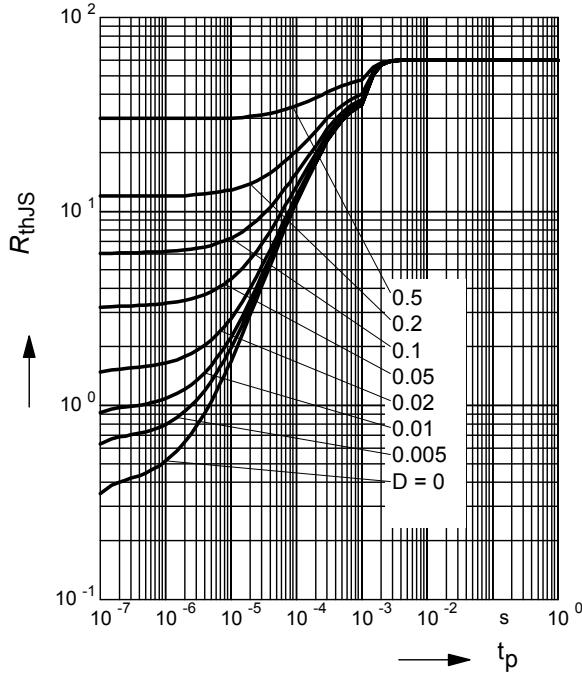

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129L3

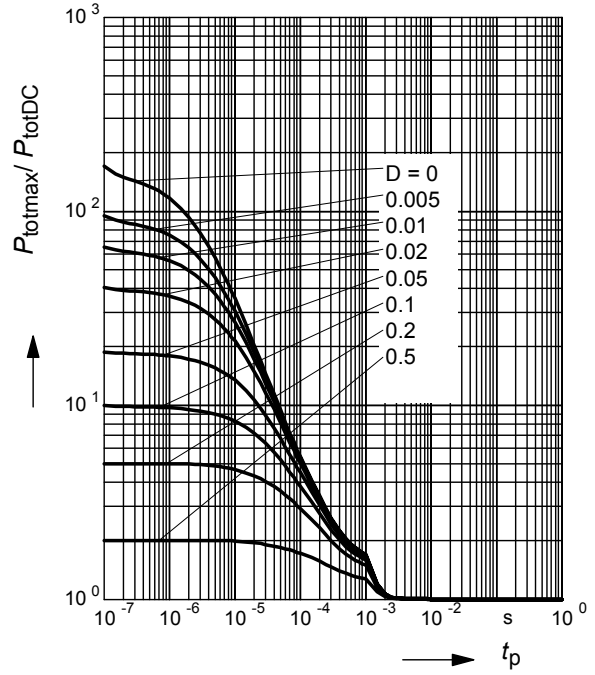

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129S

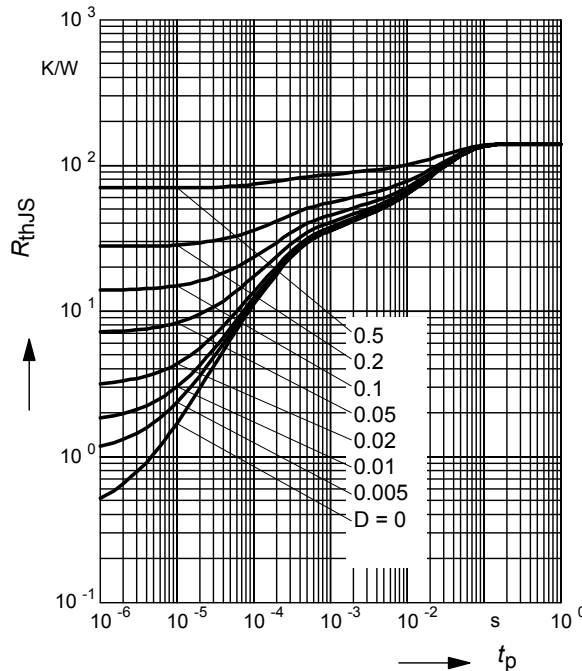

**Permissible Pulse Load**

$P_{totmax}/P_{totDC} = f(t_p)$


BCR129S

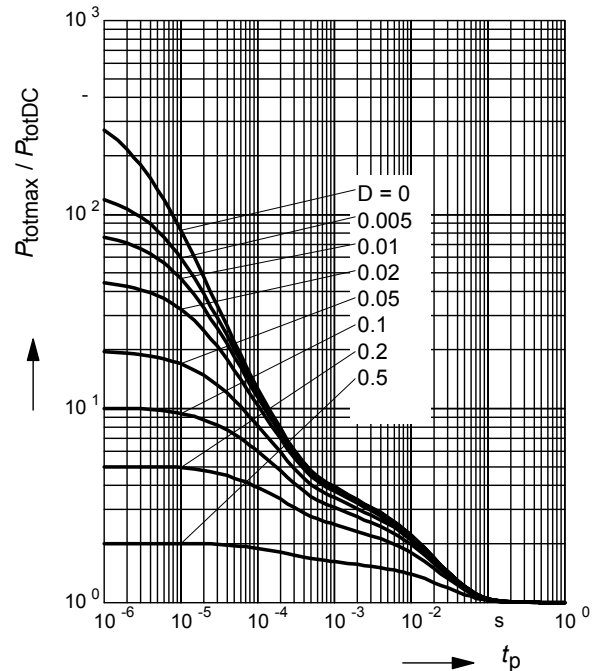



Permissible Puls Load  $R_{thJS} = f(t_p)$


BCR129T

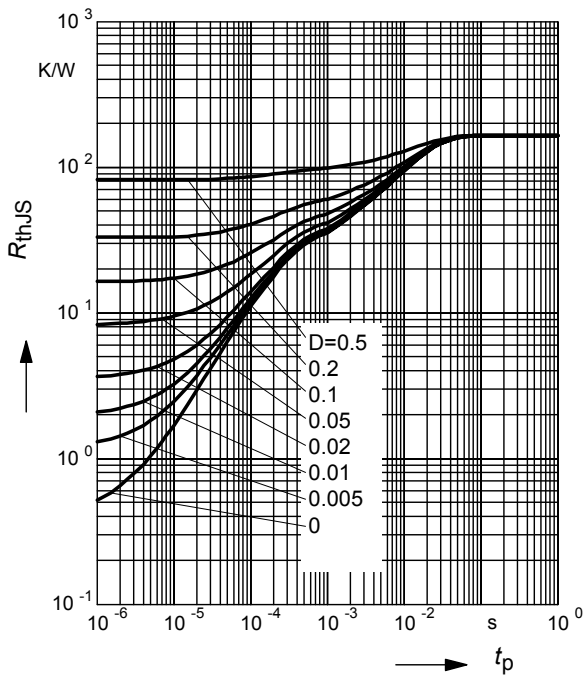

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129T

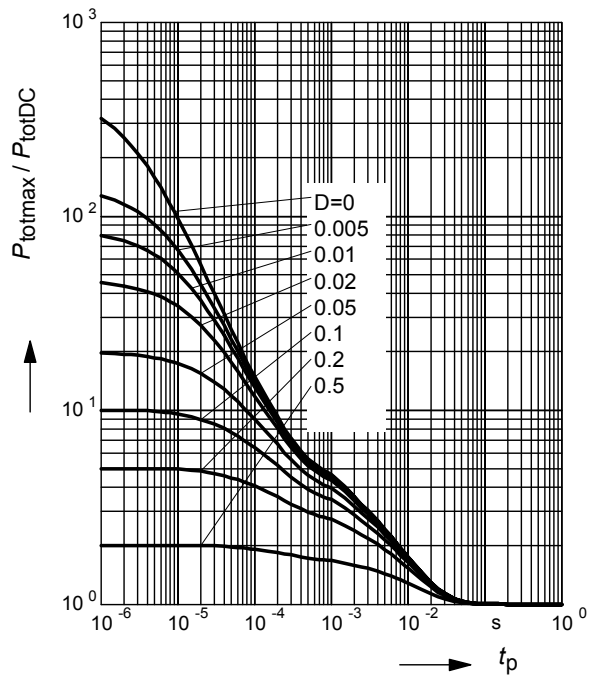

Permissible Puls Load  $R_{thJS} = f(t_p)$


BCR129W

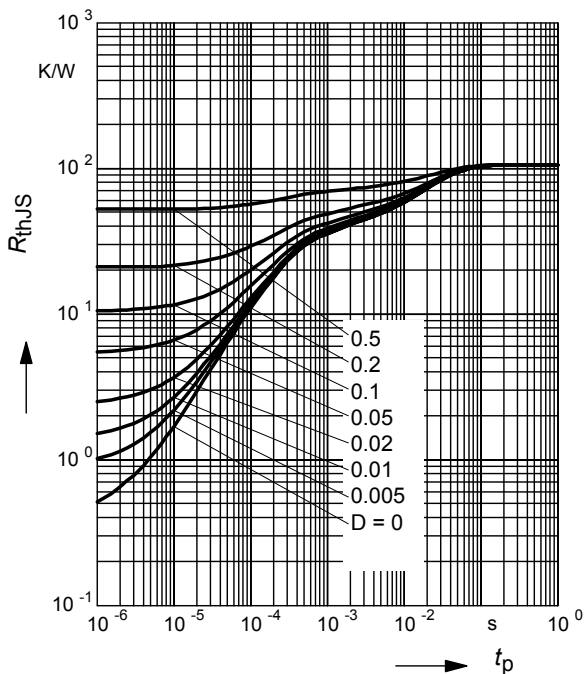

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129W

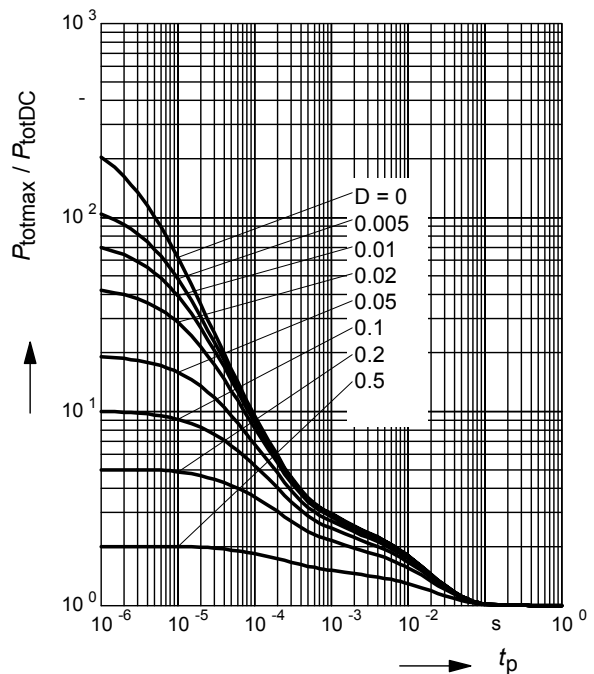

Permissible Puls Load  $R_{thJS} = f(t_p)$

SEM4

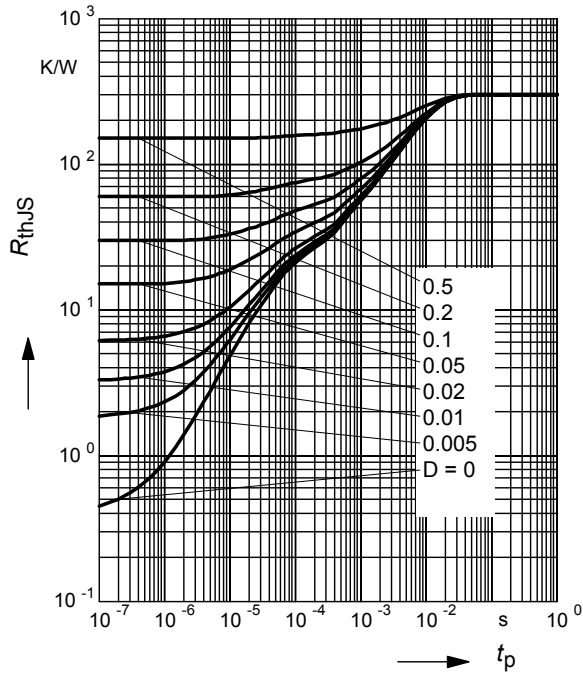

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

SEM4

