
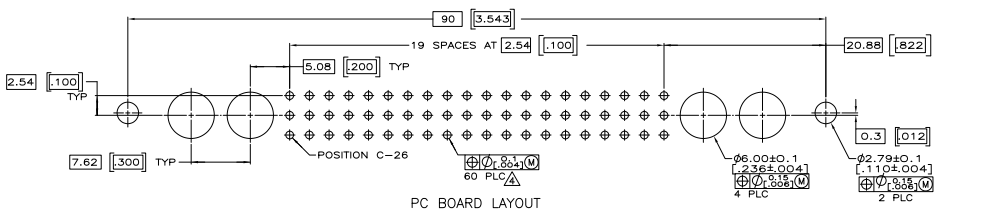


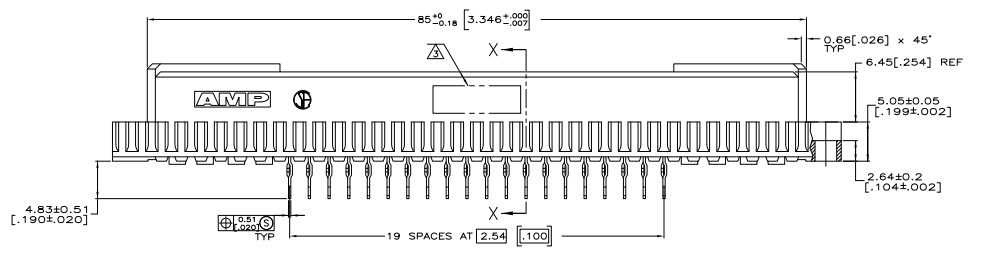


THIS DRAWING IS UNCLASSIFIED
 RELEASED FOR PUBLICATION
 DATE 08-2010 BY 2520 ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
AD	25			
01		REVISED PER ECO-08-013371	DALEMAN	DH DB

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ CONTACT MATERIAL: COPPER ALLOY.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD DRILLED HOLES ARE $\phi 1.51 \pm 0.025 [0.453 \pm 0.010]$ WITH $0.02-0.08 [0.01-0.03]$ COPPER AND $0.008 [0.003]$ MINIMUM TIN-LEAD PLATING. FINISHED HOLES AFTER PLATING $\phi 0.94-1.09 [0.37-0.43]$.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ CONTACT POINT.
- △ MARKING ON THIS SIDE.

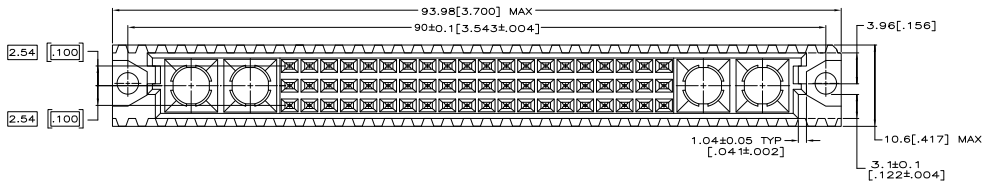

THIS DRAWING IS A CONTROLLED DOCUMENT		REV		POLYCHROME		TAYLOR	
DATE	BY	DATE	BY	DATE	BY	DATE	BY
DRAWING NO. 100779				CUSTOMER DRAWING			
REV. 4.1				REV. 1			

5148420-5 PART NUMBER

Two Electronics Corporation
 Harrisburg, PA 17105-3608

ASSEMBLY, RECEPTACLE, TYPE M, EUROCARD,
 60+4, PRESS-FIT,
 4.63(190)

SIZE: ONE SIZE (DRAWING NO. 5148420)
 100779 (G) 5148420
 REFINISHED TO: —

AMP 485 REF 3/2003