

# Output filters FN 5020

## Sine wave output filter for high-speed motor drives

**SCHAFFNER**

energy efficiency and reliability



- Smoothing of PMW drive output voltage
- Suitable for motor frequencies up to 600Hz
- Increased service life of expensive high-speed motors
- Reduction of audible motor noise
- Improvement of system reliability
- Production up time for mission critical applications


### Approvals



### Technical specifications

Maximum continuous operating voltage:	3x 500/288VAC
dc link voltage:	1000VDC max.
Motor frequency:	0 to 600Hz
Switching frequency:	6 to 15kHz
Rated currents:	25 to 120A @ 50°C
Motor cable length:	200m max.
Residual ripple voltage:	<5%
High potential test voltage:	P → E 2000VAC for 2 sec P → P 1000VDC for 2 sec
Protection category:	IP20
Overload capability:	1.5x rated current for 1 minute, once per hour
Temperature range (operation and storage):	-25°C to +100°C (25/100/21)
Flammability corresponding to:	UL 94V-2 or better
Design corresponding to:	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
MTBF @ 50°C/400V (Mil-HB-217F):	>100,000 hours

### Typical electrical schematic

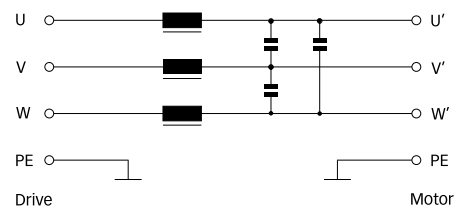

### Features and benefits

- Suitable for fast rotating fields up to 600Hz.
- Conversion of the PWM output signal (symmetrical voltage components) of motor drives into a smooth sine wave with low residual ripple.
- Elimination of premature motor damage caused by high dv/dt, overvoltages, motor overheating and eddy current losses.
- Significantly increased service life of expensive (high-speed) motors.
- Reduction of the pulse load of motor drive IGBTs and the parasitic losses on long shielded motor cables.
- Less interference propagation towards neighboring equipment or lines.
- Advanced choke design to minimize filter losses and voltage drop.
- IP20 protection, touch-safe terminals and temperature monitoring function to increase overall equipment safety.

### Typical applications


Motor drives and motors in high-speed applications, like:

- High-speed spindles
- Textile machinery
- Lasers
- Military appliances (400Hz)

Motor drive applications with medium to long motor cables and/or with multiple motors in parallel, like:

- Pumps
- Conveyors


**Filter selection table**

Filter	Rated current @ 50°C	Typical motor power rating*	Typical power loss**	Output connections	Weight
	[A]	[kW]	[W]		[kg]
FN 5020-25-33	25	15	n.a.	-33	13
FN 5020-55-34	55	30	n.a.	-34	29
FN 5020-75-35	75	45	n.a.	-35	49
FN 5020-120-35	120	75	n.a.	-35	57

\* General purpose four-pole (1500r/min) AC induction motor rated 480V/50Hz.

\*\* Exact value highly depends upon the motor cable type and length, switching frequency, motor frequency and further stray parameters within the system. Please contact your local Schaffner partner for individual application support.

**Typical block schematic**

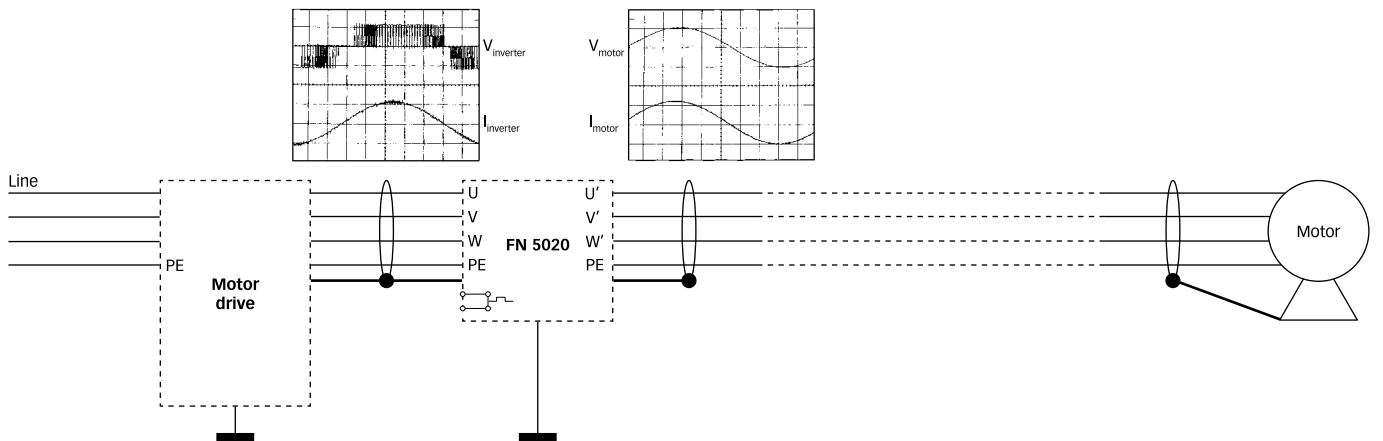

**Temperature monitoring function**

All filters of this range are equipped with a temperature monitoring function. The built-in temperature sensor opens a potential-free contact in the case of filter overtemperature

(>120°C). The maximum switching capability is 6A/250V. This function can be used, for example, in the input of a CNC controller or as the trip of a circuit breaker in order to

interrupt the mains power supply. Connections are located next to the phase connectors (see mechanical data for details).

**Forced cooling**

The 75A and 120A filters provide internal cooling fans which require external power


supply (24VDC/~4W). Connections are located next to the connectors of the

temperature sensor (see mechanical data for details).


For additional information please consult the Schaffner application note „Sinus Plus – New Output Filter Concept for Power Drive Systems“.

**Mechanical data**

25 and 55A types

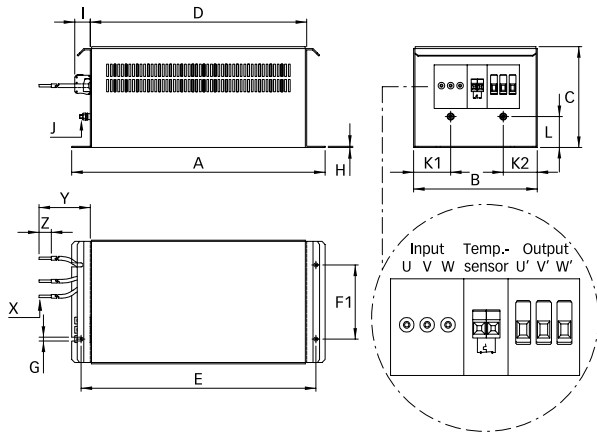

75 and 120A types

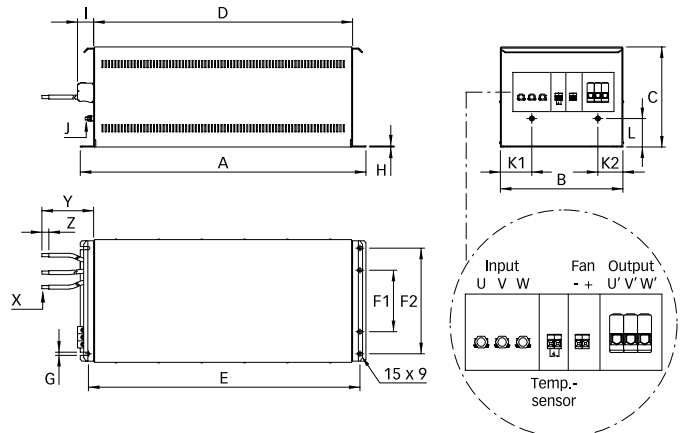

**Dimensions**

	25A	55A	75A	120A
A	410	554	799	799
B	200	250	343	343
C	163	203	280	280
D	350	500	725	725
E	380	524	760	760
F1	120	170	172	172
F2			296	296
G	6.5	9	9	9
H	2	3	3	3
I	25	39	45	45
J	M6	M6	M8	M8
K1	60	70	88	88
K2	55	55	70	70
L	50	69	80	80
X	AWG 10	AWG 6	25mm <sup>2</sup>	35mm <sup>2</sup>
Y	1000 +20/-0	1000 +20/-0	1000 +20/-0	1000 +20/-0
Z	20	20	20	20

All dimensions in mm; 1 inch = 25.4mm  
Tolerances according: ISO 2768-m / EN 22768-m

**Filter output connector cross sections**

	-29	-33	-34	-35
<b>Solid wire</b>	6mm <sup>2</sup>	16mm <sup>2</sup>	35mm <sup>2</sup>	50mm <sup>2</sup>
<b>Flex wire</b>	4mm <sup>2</sup>	10mm <sup>2</sup>	25mm <sup>2</sup>	50mm <sup>2</sup>
<b>AWG type wire</b>	AWG 10	AWG 6	AWG 2	AWG 1/0
<b>Recommended torque</b>	0.6 - 0.8Nm	1.5 - 1.8Nm	4.0 - 4.5Nm	7 - 8Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.