
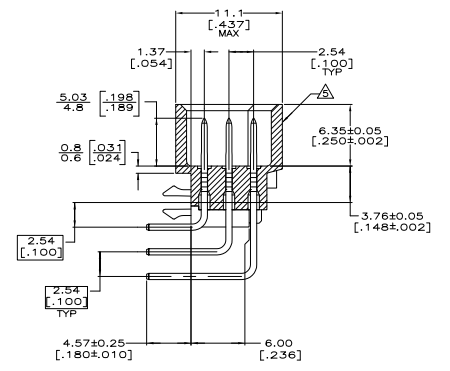


THIS DRAWING IS UNPUBLISHED. REPRODUCED FOR INFORMATION.  
 © 2008 TTI INC. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
01		REV PER ECO-04-04601			

- △ HOUSING: GLASS-FILLED POLYMER.  
POST: COPPER ALLOY.
- △ POST: DIN 41612 CLASS 2 IN CONTACT AREA,  
TIN PLATE ON POSTS.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF  
CONNECTOR ONTO PC BOARD.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.
- △ MARKING ON THIS SIDE.

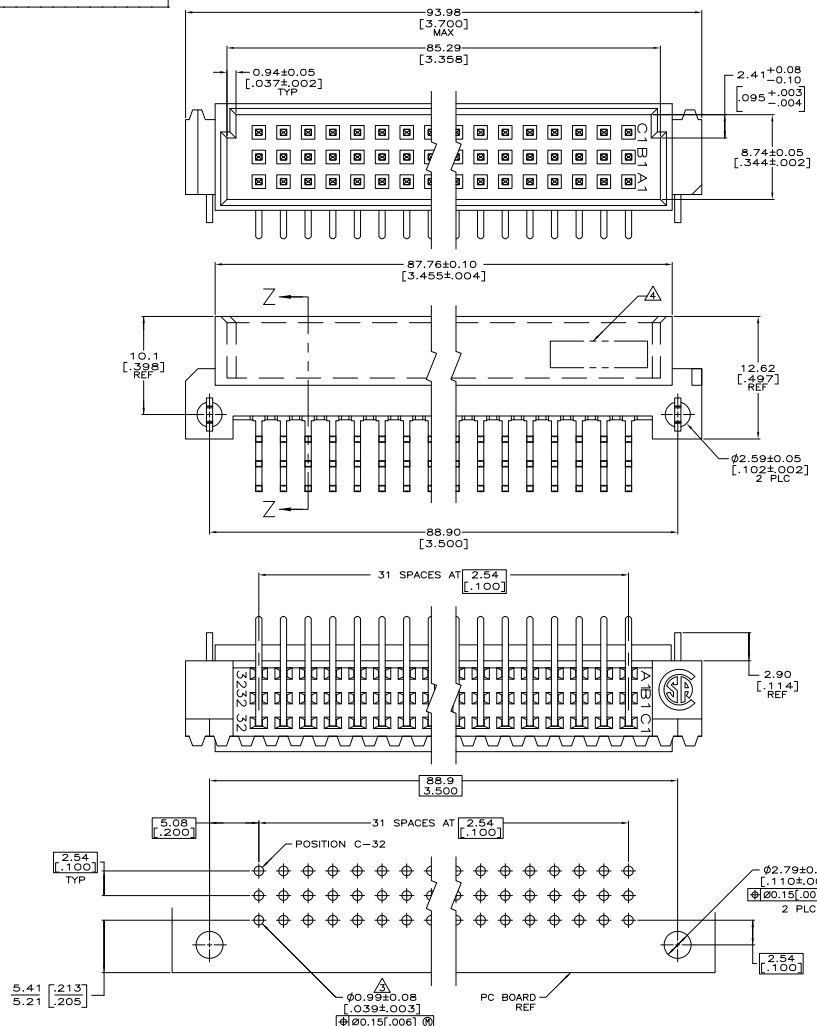

SECTION Z-Z

PC BOARD LAYOUT  
 RECOMMENDED PC BOARD THICKNESS 1.57[.062]

5148539-5  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	EDUCATION	REVISED	Customer	Trio Electronics Corporation Harrisburg, PA 17105-3608	
INCHES	UNLESS OTHERWISE SPECIFIED	OR	SHAPE	REVISED	DATE	ASSEMBLY, PIN, EUROCARD, TYPE C, 96 POSITION, 4.57(180) SOLDER POST WITH BOARD-LOCKS	
FRONT	FRONT	OR	SHAPE	REVISED	DATE	SIZE	DATE SIZE DRAWING NO
FRONT	FRONT	OR	SHAPE	REVISED	DATE	A1	00779 C=5148539
FRONT	FRONT	OR	SHAPE	REVISED	DATE	CUSTOMER DRAWING	DATE SIZE