
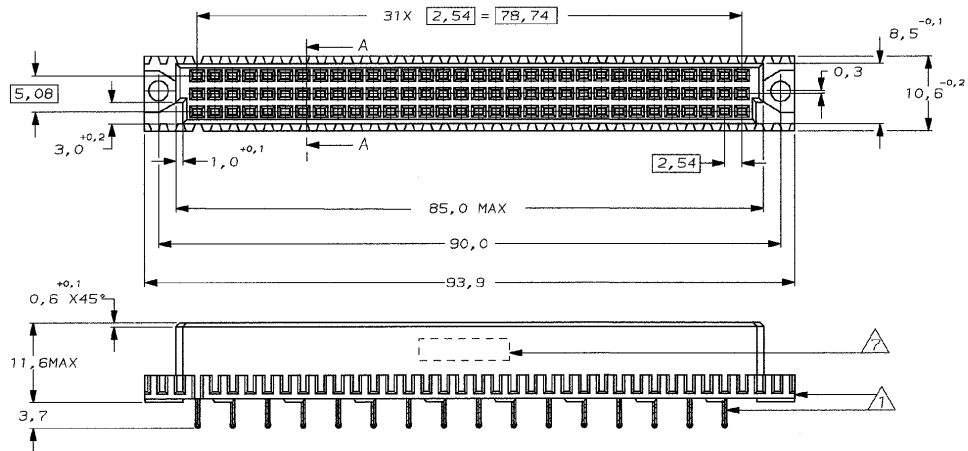


P.C.B. HOLE DIM. ACTION PIN
 DRILLED HOLE $\pm 0,15 \pm 0,025$ mm
 FIN. HOLE $\pm 0,94$ to $1,09$ mm
 AFTER REFLOW $\pm 0,91$ to $1,09$ mm
 Cu-thks $\pm 0,025$ to $0,075$ mm
 SnPb-thks $\pm 0,004$ to $0,010$ mm

DO NOT SCALE
 DIMENSIONS IN mm

METRIC

THIRD ANGLE
 PROJECTION



NOTES:

- 1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612, PART 5.
- 2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR: GREY
- 3 AT CONTACTAREA 1,25 µm GOLD OVER 1,25 µm NICKEL AT ACTION PIN AREA 1,25 µm TIN-LEAD (93/7).
- 4 AT CONTACTAREA 0,8 µm GOLD OVER 1,25 µm NICKEL AT ACTION PIN AREA 1,25 µm TIN-LEAD (93/7).
- 5 CONTACT ARRANGEMENTS; AN ASTERISK "*" DENOTES A CONTACT.
- 6 AT CONTACTAREA 0,4 µm GOLD OVER 1,25 µm NICKEL AT ACTION PIN AREA 1,25 µm TIN LEAD (93/7).
- 7 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
- 8 FOR P.C.B. BOARDS 1,6mm OR THICKER

	c	b	a	5
1	0	0	0	
2	X	X	X	
3	X	X	X	
4	X	X	X	
5	X	X	X	
6	X	X	X	
7	X	X	X	
8	X	X	X	
9	X	X	X	
10	X	X	X	
11	X	X	X	
12	X	X	X	
13	X	X	X	
14	X	X	X	
15	X	X	X	
16	X	X	X	
17	X	X	X	
18	X	X	X	
19	X	X	X	
20	X	X	X	
21	X	X	X	
22	X	X	X	
23	X	X	X	
24	X	X	X	
25	X	X	X	
26	X	X	X	
27	X	X	X	
28	X	X	X	
29	X	X	X	
30	X	X	X	
31	X	X	X	
32	X	X	X	

OBSOLETE

OBSOLETE

FINISH

CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED

© COPYRIGHT 19... BY AMP-HOLLAND B.V.
 ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.
 THIS DRAWING IS UNPUBLISHED
 RELEASED FOR PUBLICATION



32 POS. C FEMALE B.T.B. CONN. ACC. DIN 41612 WITH ACTION-PIN

DR. S. MEIJEREN	CHK. J. OUBELLS	APP. -	DWG. NO. C-216088	REV. LTR. D	SHEET 1 of 1
DATE: 01 MAR '89	DATE: 19-11-92	DATE: -			A3

8 7 6 5 4 3 2 1