



DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION



SECTION A-A

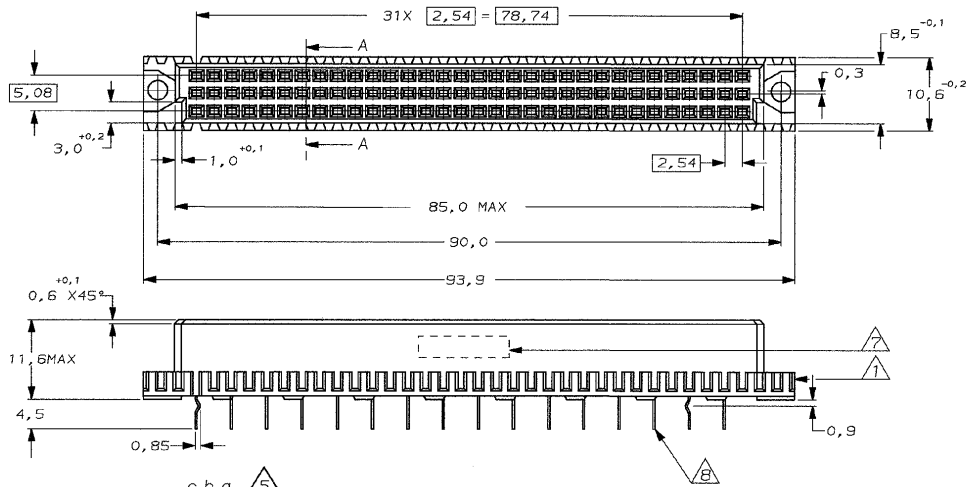

NOTES:

- 1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612, PART 5.
- 2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR: GREY
- 3 AT CONTACT AREA 1,25 μm GOLD OVER 1,25 μm NICKEL AT SOLDER POST AREA 1,25 μm TIN-LEAD (93/77).
- 4 AT CONTACT AREA 0,8 μm GOLD OVER 1,25 μm NICKEL. AT SOLDER POST AREA 1,25 μm TIN-LEAD (93/77).
- 5 CONTACT ARRANGEMENTS: AN AN ASTERISK * X * DENOTES A SIGNAL CONTACT. AN ASTERISK * @ * DENOTES A KINKED SIGNAL CONTACT.
- 6 AT CONTACT AREA 0,4 μm GOLD OVER 1,25 μm NICKEL. AT SOLDER POST AREA 1,25 μm TIN LEAD (93/77).
- 7 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
- 8 SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES.

c	b	a	5
0	0	0	1
X	X	X	2
0	0	0	3
0	0	0	4
0	0	0	5
0	0	0	6
0	0	0	7
X	X	X	8
0	0	0	9
X	X	X	10
0	0	0	11
X	X	X	12
0	0	0	13
X	X	X	14
0	0	0	15
X	X	X	16
0	0	0	17
X	X	X	18
0	0	0	19
X	X	X	20
0	0	0	21
X	X	X	22
0	0	0	23
X	X	X	24
0	0	0	25
X	X	X	26
0	0	0	27
X	X	X	28
0	0	0	29
X	X	X	30
0	0	0	31
0	0	0	32

OBSOLETE	△	△	△	216098-8
OBSOLETE	△	△	△	216098-4
OBSOLETE	△	△	△	216098-1

	FINISH	MATERIAL	PARTNUMBER
-	-	-	-
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED			
© COPYRIGHT 19- BY AMP-HOLLAND B.V.			
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
THIS DRAWING IS UNPUBLISHED			
RELEASED FOR PUBLICATION 19			
AMP		AMP-HOLLAND B.V. s-Hertogenbosch, The Netherlands.	
NAME		32 POS C FEMALE B.T.B.CONN.	
F EH-1253-96		ACC. DIN 41612 WITH SOLDER POSTS	
E H-8861		FOR 2,4 or 3,2mm. P.C.BOARD THK'S	
LTR.	REVISION RECORD	DR. CHK. DATE	DWG.No.
DR. J.v.LIEMPT.	CHK. J. BIBBELS	APP. -	C-216098
DATE 19 JUNE 1993	DATE 19-11-93	DATE -	REV. LTR. SHEET
			F 1 of 1 A3