

# “High Frequency Ceramic Solutions”

## 890 MHz Low Pass Filter

P/N 0898LP18A035



Detail Specification Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation 2 x Fo	Attenuation 3 x Fo	Return Loss
0898LP18A035_	880 - 915	0.6 dB max	30 dB min.	18 dB min.	10.9 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	3000


### Mechanical Dimensions

	L	W	T	a	b
Inches	0.126 ± .012	0.064 ± .012	0.039 ± .008	0.031 ± .012	0.020 ± .012
mm	3.2 ± 0.3	1.6 ± 0.3	1.0 ± 0.2	0.80 ± 0.3	0.50 ± 0.3




### Terminal Configuration

No.	Function	No.	Function
1	I/O	3	GND
2	I/O	4	GND



### Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50Ω impedance matching characteristics.

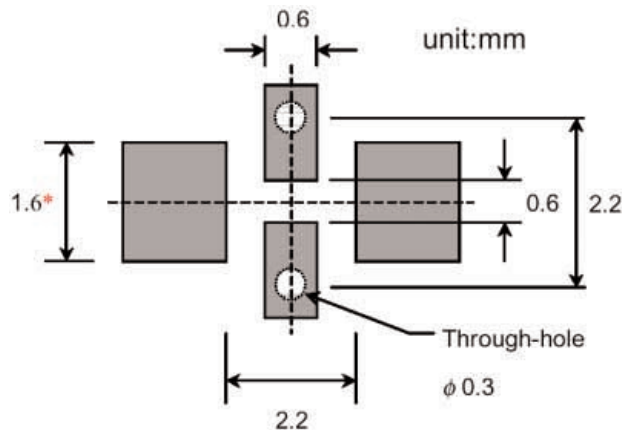

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.

# “High Frequency Ceramic Solutions”

890 MHz Low Pass Filter

P/N 0898LP18A035

Detail Specification Page 2 of 2

P/N 0898LP18A035 Low Pass Filter  
Typical Insertion Loss & Return Loss

