

# "High Frequency Ceramic Solutions"

## 1.88 GHz Low Pass Filter

P/N 1880LP14A060

Detail Specification



Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
1880LP14A060_	1850 - 1910	0.6 dB max.	27 dB @ $2 \times f_o$ 19 dB @ $3 \times f_o$	11.7 dB min.

Input Power	Impedance	Operating Temperature Range
3 Watt max	50 $\Omega$	-40 to +85°C


### Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.063 ± .004	0.032 ± .004	0.024 ± .004	.008 ± .004	0.008 ± .004/-0.006	.006 ± .004	0.012 ± .004	0.020 ± .002
mm	1.6 ± 0.1	0.80 ± 0.1	0.60 ± 0.1	0.20 ± 0.1	0.20 ± 0.1/-0.15	0.15 ± 0.1	0.30 ± 0.1	0.50 ± 0.05

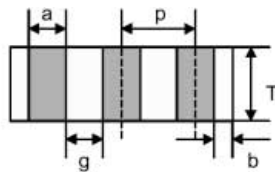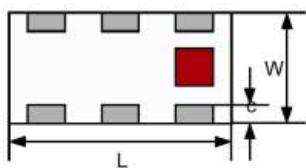




### Terminal Configuration

No.	Function	No.	Function
1	GND	4	OUT
2	NC	5	GND
3	GND	6	IN




### Mounting Considerations

- Mount these devices with brown mark facing up.
- Line width should be designed to provide 50 $\Omega$  impedanc

-  Solder Resist
-  Land
-  Through-hole ( $\phi$  0.35)

Unit=mm

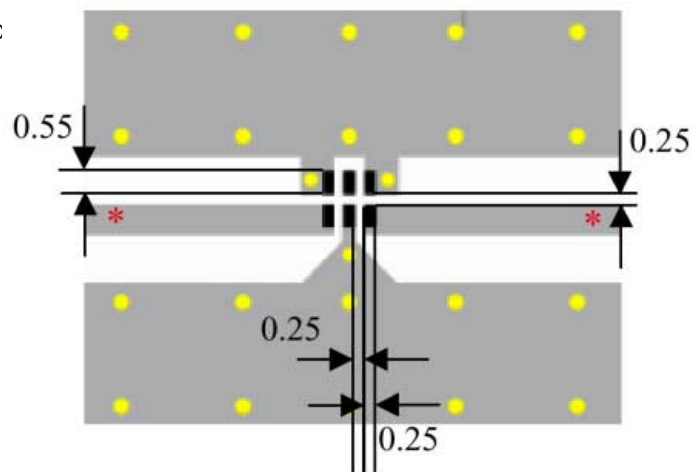

*Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.*


## 1.88 GHz Low Pass Filter

Detail Specification

P/N 1880LP14A060

Page 2 of 2

Typical Insertion Loss / Return Loss

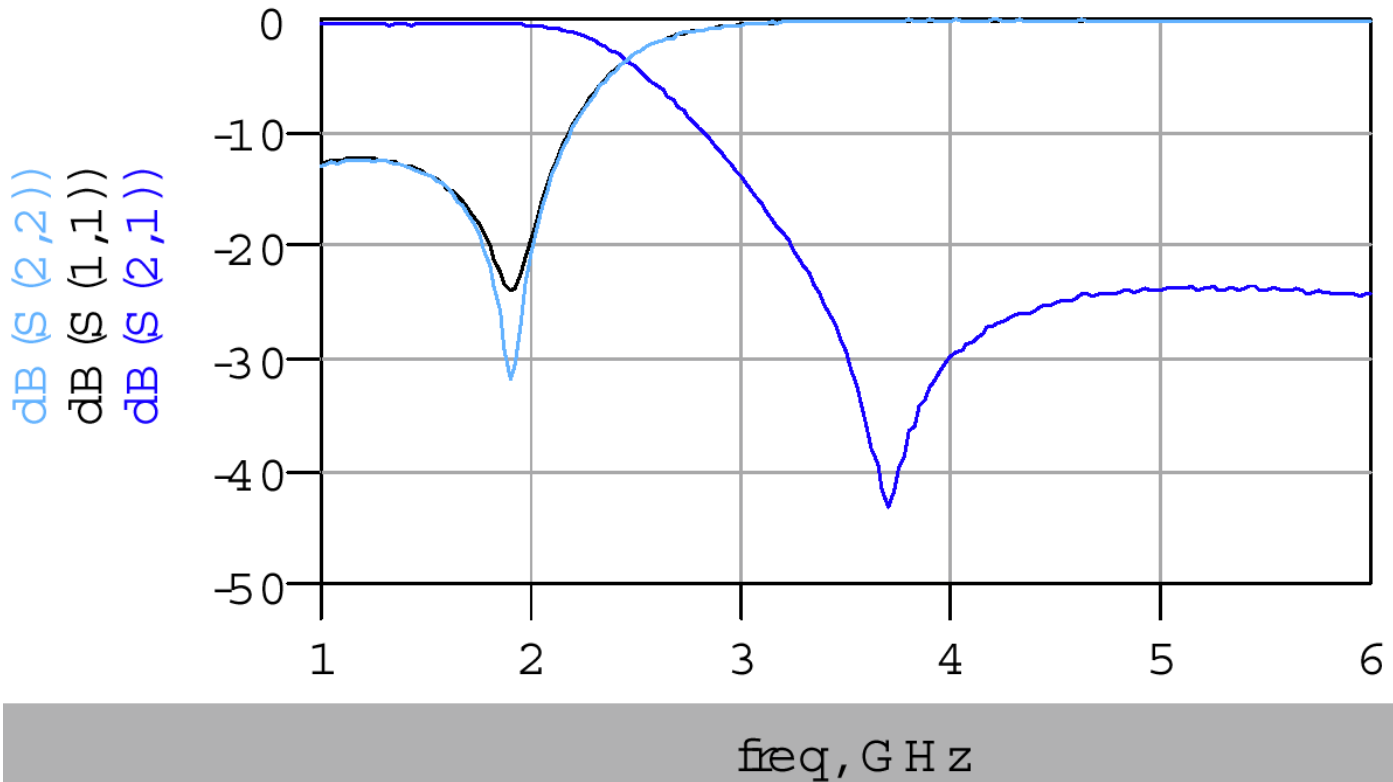

### Delivery

Packaged in embossed tape on 7" reels (4000 / reel)  
Standard delivery is eight weeks or sooner ARO