

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
J		EH-0039-92	30-10-92	R.v.L	-	
L1		EH-1209-00	23-11-00	RVH	-	
M		ECR-07-011431	05-06-07	BSV	MKO	

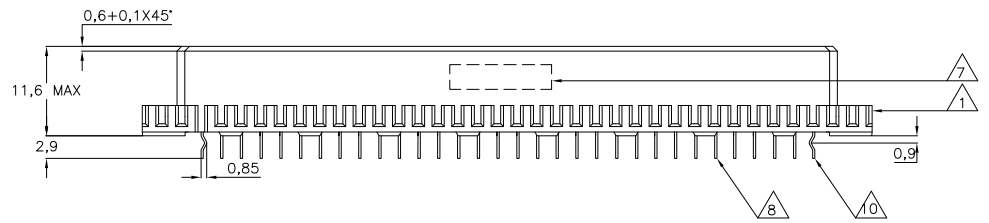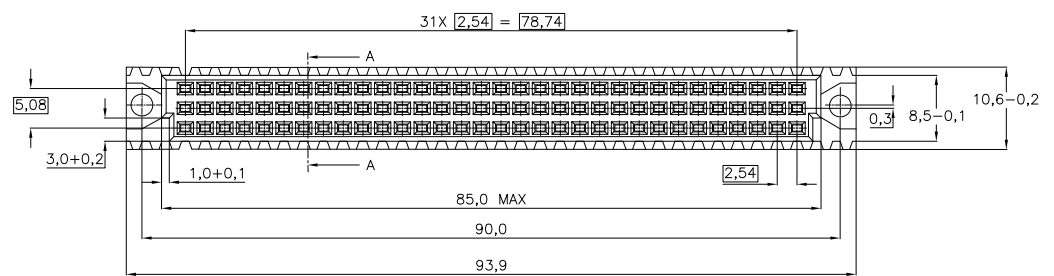

- NOTES:
- 1. CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41613, PART 5.
 - 2. MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR: GREY
 - 3. AT CONTACT AREA 1,25 μm GOLD OVER 1,25 μm NICKEL AT SOLDER POST AREA 1,25 μm TIN.
 - 4. AT CONTACT AREA 0,8 μm GOLD OVER 1,25 μm NICKEL AT SOLDER POST AREA 1,25 μm TIN.
 - 5. CONTACT ARRANGEMENTS; AN AN ASTERISK "x" DENOTES A SIGNAL CONTACT. AN ASTERISK "o" DENOTES A KINKED SIGNAL CONTACT.
 - 6. AT CONTACT AREA 0,4 μm GOLD OVER 1,25 μm NICKEL AT SOLDER POST AREA 1,25 μm TIN.
 - 7. CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
 - 8. SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES.
 - 9. FLUX RESISTANCE STRIP.
 - 10. KINKED POSTS.
 - 11. AT CONTACT AREA 0,1 μm GOLD OVER 0,7 μm PALLADIUM (DURAGOLD) OVER 1,25 μm NICKEL, AT SOLDER POST AREA 1,25 μm TIN.

WITH	WITHOUT	1	2	OBsolete	7-216081-4
WITH	WITH	1	2	OBsolete	6-216081-4
WITHOUT	WITHOUT	4	2	OBsolete	3-216081-4
WITH	WITHOUT	4	2		1-216081-4
WITH	WITH	6	2	OBsolete	216081-8
WITH	WITH	4	2		216081-4
WITH	WITH	3	2	OBsolete	216081-1
10	9	FINISH	MATERIAL	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN J.v.LIEMPT. 19JUN91	19JUN91	Tyco Electronics Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
	0 PLC ± -	CHK J.v.GRUNSVEN. 19JUN91	19JUN91	NAME	
	1 PLC ± -	APVD L.v.SOEST. 19JUN91	19JUN91	96 POS C FEMALE B.T.B.CONN. ACC. DIN 41612 WITH SOLDER POSTS FOR 1,6mm. P.C.BOARD THK'S.	
MATERIAL	FINISH	PRODUCT SPEC	APPLICATION SPEC	SIZE A3	CAGE CODE -
		WEIGHT		DRAWING NO. C-216081	RESTRICTED TO
		CUSTOMER DRAWING		SCALE NTS	SHEET 1 of 1 REV M

AMP 1470-19 REV 31MAR2000