


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION

P.C.B. HOLE DIM.	ACTION PIN
DRILLED HOLE	1,15 ±0,025 mm
PIN HOLE	0,94 to 1,08 mm
AFTER REFLOW	0,91 to 1,08 mm
Cu-thru	0,025 to 0,075 mm
SnPb-thru	0,004 to 0,010 mm

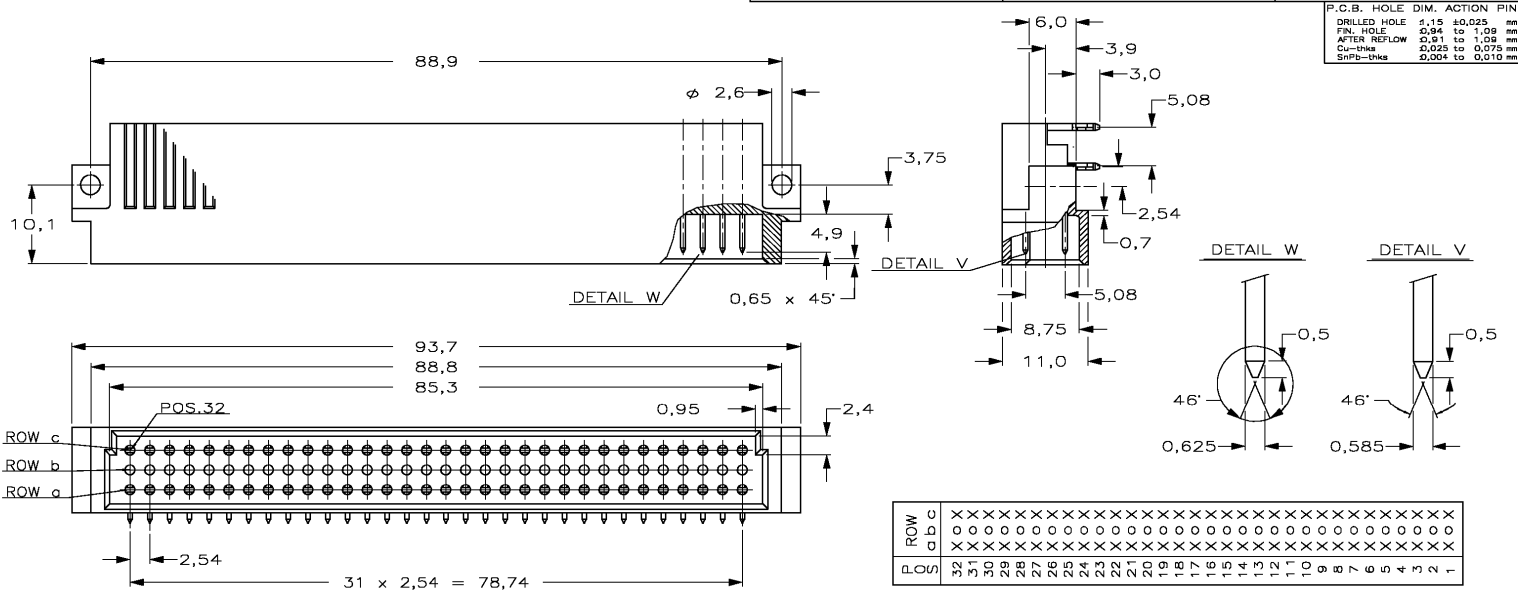

AN ASTERISK „X” DENOTES A CONTACT.

NOTES:

- 1 MATERIAL:
 - HOUSING: THERMOPL.POLYESTER
 - COLOUR : GREY
 - CONTACTS: PHOSPHORBRONZE
- 2 PLATING CONTACT :
 - 1 : AT CONNECTOR MATING SIDE Au OVER Ni, PERFORMANCE LEVEL I, ACC. IEC 603-2. SnPb AT ACTION-PIN.
 - 4 : AT CONNECTOR MATING SIDE Au OVER Ni, PERFORMANCE LEVEL II, ACC. IEC 603-2. SnPb AT ACTION-PIN.

OBSOLETE	SEE NOTE	SEE NOTE	216432-8
OBSOLETE	SEE NOTE	SEE NOTE	216432-7
	SEE NOTE	SEE NOTE	216432-4
	SEE NOTE	SEE NOTE	216432-1

FINISH				MATERIAL		PARTNUMBER	
-	-	-	-	CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED	
© COPYRIGHT 19 - BY Tyco Electronics EC N.V. ALL INTERNATIONAL RIGHTS RESERVED. Tyco PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION -19-							
C	SR10-0227-02	BC	BC	06-Apr-'02	Tyco Electronics EC N.V. Oostkamp - Belgium		
B	EH-0831-97	J.G.	J.G.	28-07-97	NAME		
A	H-8830	R.v.L	J.v.G	29.07.91	64 POS. DIN 41612 TYPE C MALE CONN. WITH ACTION-PIN FOR 1,6 P.C.B. THK'S		
LTR.	REVISION RECORD		DR.	CHK.	DATE	DWG.No.	
DATE:	Colpoert B.	DATE:	Colpoert B.	APP.:	Colpoert B.	DWG.No.	REV.LTR. SHEET
						C- 216432	C 1 of 1 A3

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1