

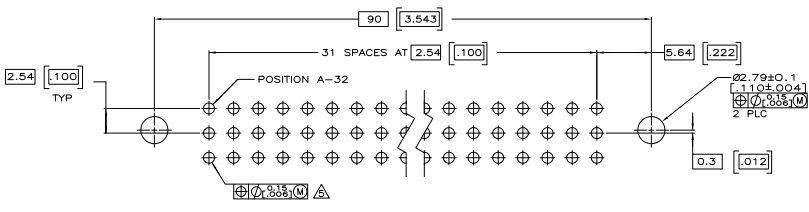
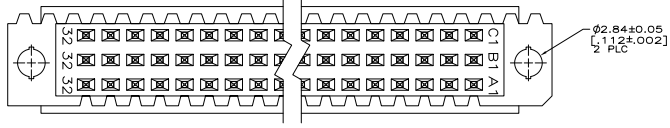
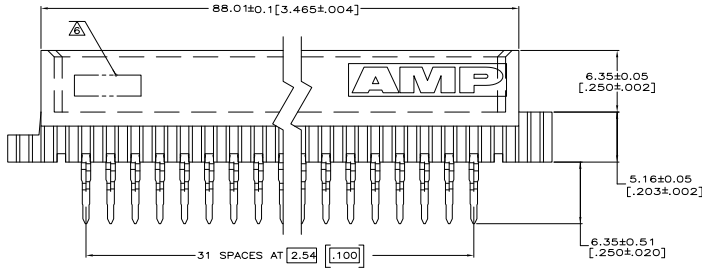


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHKD	APPD
AD 25	F	REVISED PER EDD-11-004835		11MR11	RK HMR

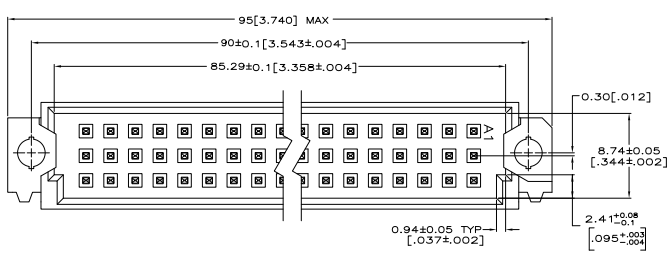

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ ACTION PIN POSTS REQUIRE 2.36[.093] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE 1.15[.0453] DIA PLATED THROUGH WITH 0.02-0.08[.001-.003] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, 0.94-1.09[.037-.043] DIA.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

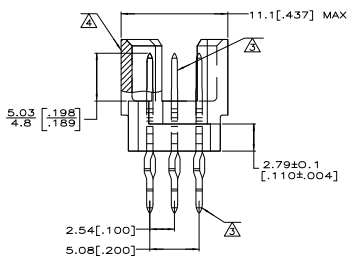

POSITIONS LOADED		X	X	X	96	5650889-5
ROWS LOADED		C	B	A	NO. OF LOADED POSITIONS	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REVOLUTIONS		REVISED		DATE		BY		CHKD		APPD	
DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)		DIMENSIONS (mm INCHES)	
TOLERANCE LEVELS		TOLERANCE LEVELS		TOLERANCE LEVELS		TOLERANCE LEVELS		TOLERANCE LEVELS		TOLERANCE LEVELS		TOLERANCE LEVELS	
MATERIAL		MATERIAL		MATERIAL		MATERIAL		MATERIAL		MATERIAL		MATERIAL	
FINISH		FINISH		FINISH		FINISH		FINISH		FINISH		FINISH	
PROCESS		PROCESS		PROCESS		PROCESS		PROCESS		PROCESS		PROCESS	
CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING	