

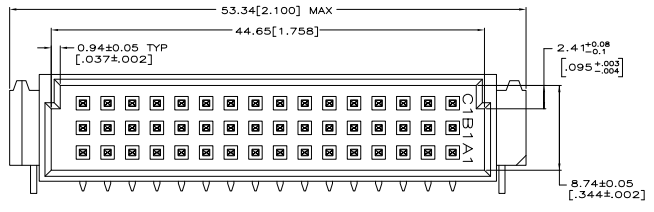
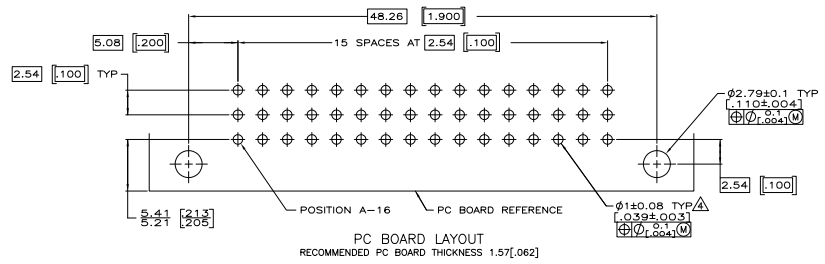
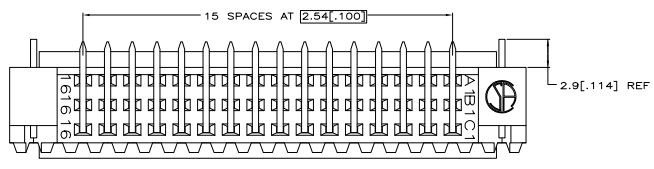


REV	DATE	DESCRIPTION	BY	APP
AD 25		RELEASED		

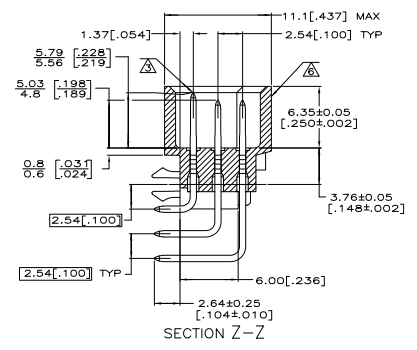

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.
- △ MARKING ON THIS SIDE.

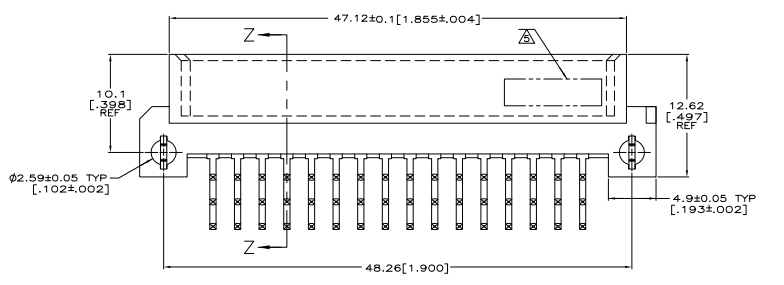

POSITIONS LOADED WITH 5.69 [.224] CONTACTS	POSITIONS LOADED WITH 4.93 [.194] CONTACTS	ROWS	NO. OF LOADED POSITION	ASSY PART NUMBER
NONE	1-16	C	16	5148083-1
NONE	1-16	B	16	
1-16	NONE	A	16	

THIS DRAWING IS A CONTROLLED DOCUMENT.

INCHES	UNLESS OTHERWISE SPECIFIED	MM	2.54
DECIMALS		MM	0.025
FRACTIONS		MM	0.127
ANGLES		DEGREES	0.001
SPACES		MM	0.254
DIAMETERS		MM	0.001
RADIUSES		MM	0.001
THREADS		MM	0.001
PLACES		MM	0.001
HOLES		MM	0.001
NOTES		MM	0.001

ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64 [.104] SOLDER POSTS, WITH BOARD-LOCKS, INTEL CONTACTS

DATE: 00779 Q=5148083

CUSTOMER DRAWING