
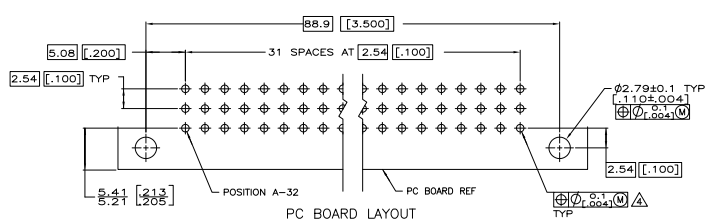
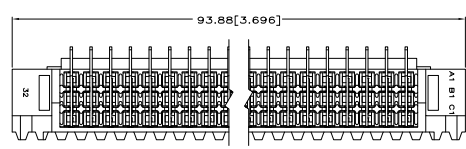




- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ CONTACT MATERIAL: COPPER ALLOY.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ COMPLIANT PIN REQUIRES 1.57[0.62] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE Ø1.15±0.025[0.453±0.010] DRILLED HOLES WITH 0.02-0.08[0.001-0.003] COPPER AND 0.008[0.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLES AFTER PLATING: Ø0.94-1.09[0.37-0.43].
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO, THIS APPROXIMATE AREA.
- △ CONTACT POINT.
- △ MARKING ON THIS SIDE.

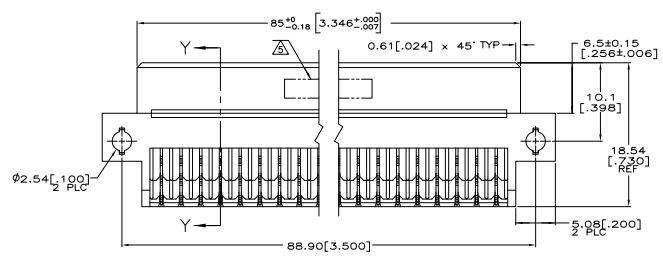

5148292-5
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
DRAWING NO.		REV	DATE	DESCRIPTION	BY	CHK	APP
REVISIONS		REV	DATE	DESCRIPTION	BY	CHK	APP
CUSTOMER DRAWING		REV	DATE	DESCRIPTION	BY	CHK	APP

ASSEMBLY: RECEPTACLE, EUROCARD, TYPE R, LEAD-FREE, 96 POSITION, 2.92[115] PRESS-FIT

5148292-5

100779(G)=5148292

REV: 4.1