

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.



LOC		DIST		REVISIONS			
F	LR	DESCRIPTION	DATE	BY	APPD		
A	WD	00/7012	20-07-09	-	VS		
B	SR10	0250-02	24-05-02	-	BC		
B1	ECR	09-015706	24-11-09	AEG	MKO		

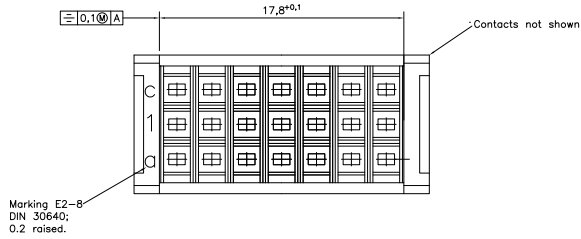

Loading Pattern (21 contacts)

	1	2	3	4	5	6	7
Row a	+	+	+	+	+	+	+
Row b	+	+	+	+	+	+	+
Row c	+	+	+	+	+	+	+

+ = contact  
o = no contact

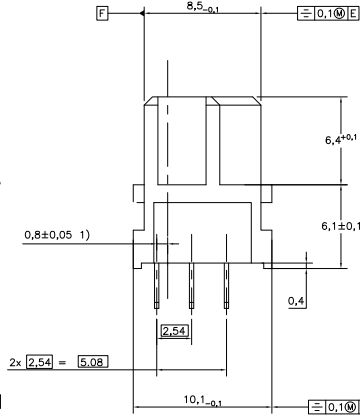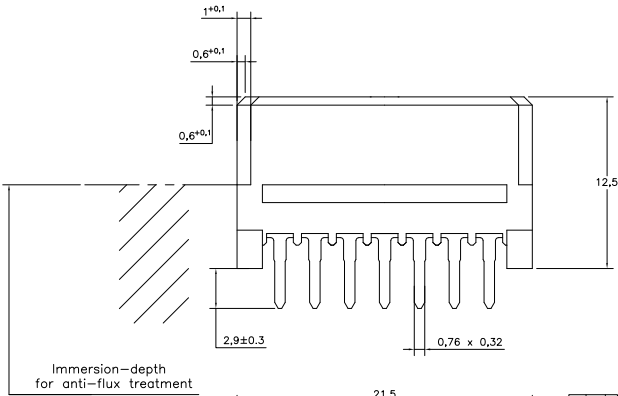


Specifications acc. IEC 603-2. Performance Level 2

Housing : PBTP 30% Glasfilled (UL94-V0)  
 Pebblegrey similar RAL 7032  
 Contact material : Copper Alloy  
 Plating : Contact area : PdNi+Au or Au  
 Termination area : Sn  
 with flux-tight coating.

1) Center-displacement between termination- and contact-side.

Active Partnumber. Contact Tyco Electronics for other configuration availability

Old Partnumber	TE Part number
V42254-F2299-R7	1393657-5

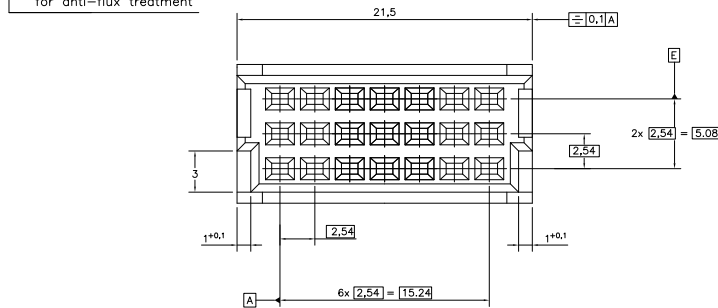

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW Cuvellier	TDJUNBR	Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
DIMENSIONS: mm		APPC	NAME	Receptacle Ass'y, Type R, 21 pos.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	APPLICATION SPEC	V42254-F2299-R7--26	
0 P.L.C.	±	WEIGHT	SIZE	CAGE CODE	DRAWING NO
1 P.L.C.	±	CUSTOMER DRAWING	A2	00779	1393657-5
2 P.L.C.	±	RESTRICTED TO	SCALE	1 of 1	
3 P.L.C.	±		5:1, 10:1	SHEET	
4 P.L.C.	±			B1	
ANGLES	±				
MATERIAL	FINISH				

1471-9 (1/08)

1393657-5

A