

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	A		EH-0243-98	17-02-98	RvH	-
		B		EH-1792-98	03-11-98	LvdH	-
		C		ECR-07-020965	22-08-08	AEG	MKO

NOTES:
 MATERIAL:
 -HOUSING: THERMOPL.POLYESTER
 COLOUR : GREY
 -CONTACTS: PHOSPHORBRONZE
 PLATING CONTACT :
 0- -4: AT CONTACT AREA 0,8µm Au OVER 1,25µm NICKEL.
 AT ACTION PIN AREA 2,5µm Sn OVER 1,25µm NICKEL.

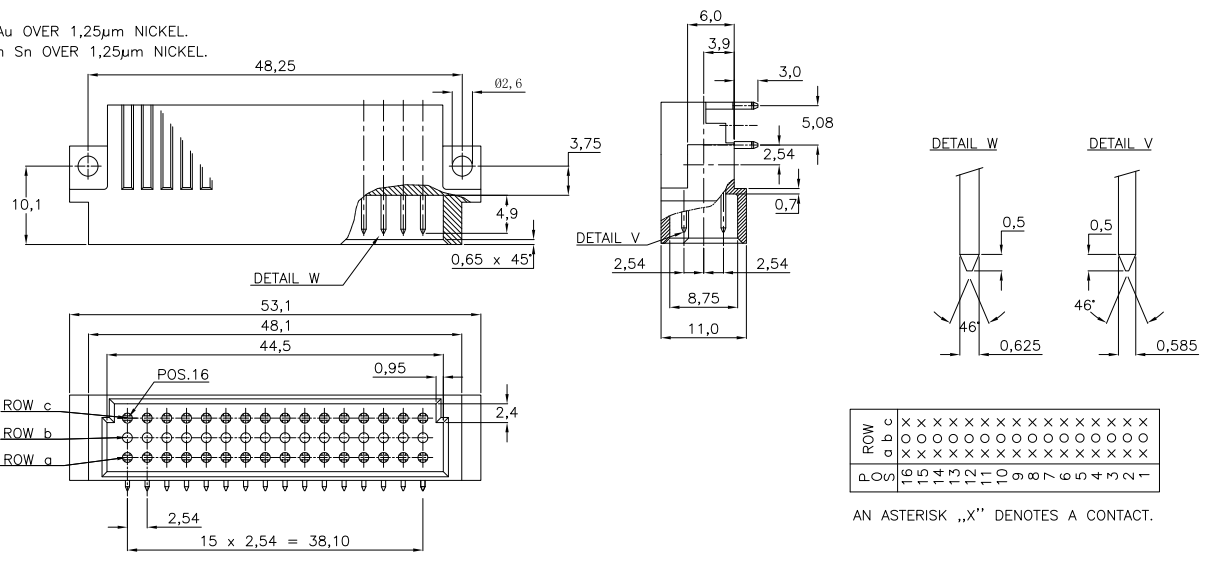

P.C.B. HOLE DIM. ACTION PIN
 DRILLED HOLE : 1,15 ± 0,025 mm
 FIN. HOLE : 0,94 to 1,09 mm
 AFTER REFLOW : 0,91 to 1,09 mm
 Cu-thks : 0,025 to 0,075 mm
 SnPb-thks : 0,004 to 0,010 mm

OBSOLETE	SEE NOTE	SEE NOTE	6-106276-8
SEE NOTE	SEE NOTE		106276-4
FINISH	MATERIAL		PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± -	4 PLC ± -	ANGLES ± -	FINISH
MATERIAL	-	FINISH	-	-	-	-	-	-	-

DWN	R.V.LOKVEN	24MAR93	Tyco Electronics Corporation 's-Hertogenbosch, Nederland
CHK	J.V.GRUNSVEN	24MAR93	
APVD	L.V.SOEST	-	NAME
PRODUCT SPEC	-	-	32 POS. DIN 41612 TYPE C/2 MALE ACTION PIN CONNECTOR FOR 1,6 P.C.B. THICKNESS
APPLICATION SPEC	-	-	SIZE
WEIGHT	-	-	A3 00779 C=106276
CUSTOMER DRAWING			RESTRICTED TO
SCALE			NTS
SHEET			1 of 1
REV			C