

4

3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
G		EH-0039-92	12-11-92	LvdH	-	
H		EH-1253-96	05-11-97	LvdH	-	
J		ECR-07-020965	23-08-08	AEG	MKO	
J1		REVISED PER ECO-09-020935	31AUG09	KK	AEG	

NOTES:

- 1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612, PART 5.
- 2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR:GREY
- 3 AT CONTACTAREA 1,25µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
- 4 AT CONTACTAREA 0,8µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
- 5 CONTACT ARRANGEMENTS; AN AN ASTERISK " X " DENOTES A SIGNAL CONTACT. AN ASTERISK " Ø " DENOTES A KINKED SIGNAL CONTACT.
- 6 AT CONTACTAREA 0,4µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
- 7 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
- 8 SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES.
- 9 FLUX RESISTANCE STRIP.
- 10 KINKED POSTS.
- 11 AT CONTACTAREA 0,1µm GOLD OVER 0,7µm PALLADIUM (DURAGOLD) OVER 1,25µm NICKEL, AT SOLDERPOST AREA 1,25µm TIN.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

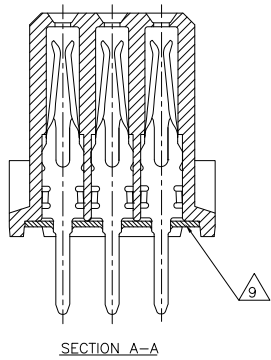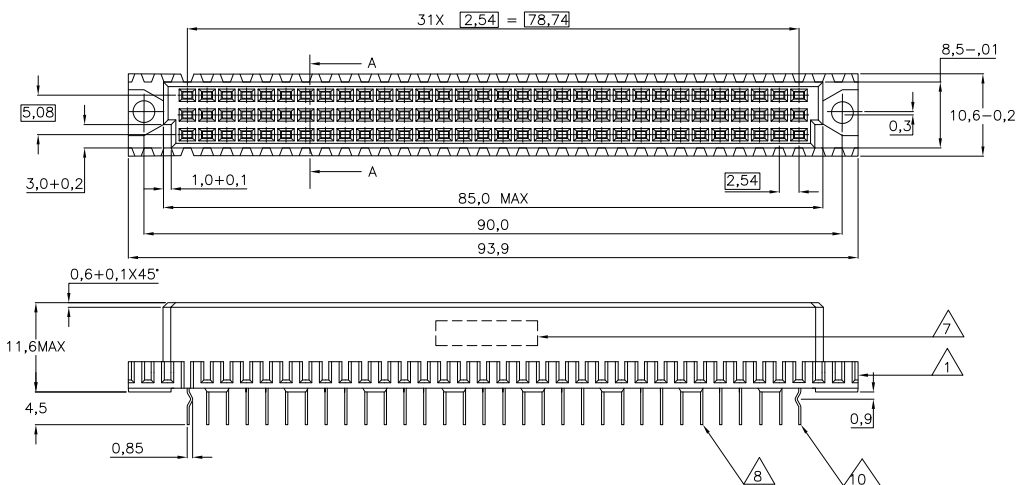

12	OBSOLETE	WITH	WITHOUT	△	△	△	△	7-216195-4
	OBSOLETE	WITH	WITHOUT	△	△	△	△	6-216195-4
	OBSOLETE	WITH	WITHOUT	△	△	△	△	1-216195-4
	OBSOLETE	WITH	WITHOUT	△	△	△	△	216195-8
	OBSOLETE	WITH	WITHOUT	△	△	△	△	216195-4
	OBSOLETE	WITH	WITHOUT	△	△	△	△	216195-1
		△	△	9	FINISH	MATERIAL	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT. 19 JUN 91

DWN: J.V.LIEMPT. Tyco Electronics Corporation
 CHK: J.GIBBELS 's-Hertogenbosch, Nederland
 APVD: - NAME

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

MATERIAL: - FINISH: -

PRODUCT SPEC: -
 APPLICATION SPEC: -
 WEIGHT: -
 SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-216195 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: NTS SHEET: 1 of 1 REV: J1