
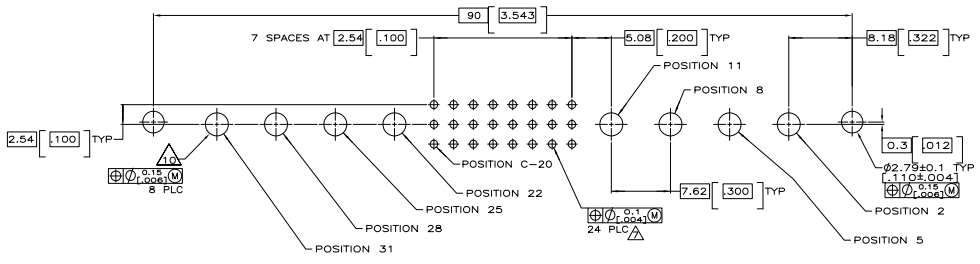


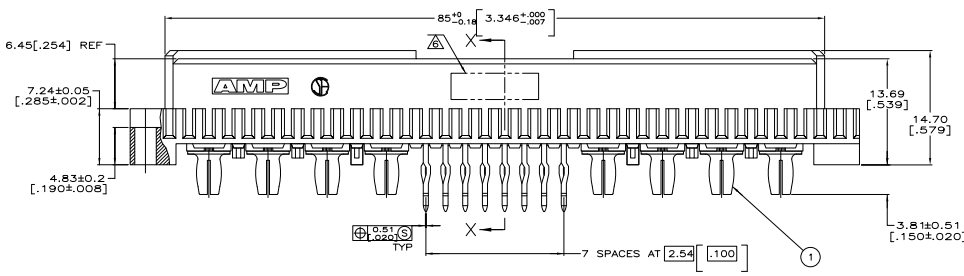


THIS DRAWING IS UNAPPROVED FOR REVISIONS
 © AMP INC. ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
G		REV PER EC 0512-003-05			17NOV95 BC AS

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ POWER CONTACT MATERIAL: BERYLLIUM COPPER.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD PLATE ON POSTS.
- △ POWER CONTACT FINISH: DIN 41612 CLASS 2 ALL OVER.
- △ PART NUMBER AND DATE CODE HOT STAMPED IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD, RECOMMENDED PC BOARD DRILLED HOLES ARE Ø1.15±0.025[.0453±0.010] WITH 0.02±0.08[.001-0.03] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING IS Ø1.02±0.08[.040±0.03].
- △ HOT STAMPING ON THIS SIDE.
- △ TAIL LENGTH AFTER SEATING IN PC BOARD.
- △ POWER CONTACTS REQUIRE 3.13±0.08 [1.23±0.03] DIAMETER DRILLED HOLE WITH 0.05±0.25 [0.02±0.011] THICK COPPER AND 0.0127 [0.005] MINIMUM TIN-LEAD PLATING. FINISHED HOLE SIZE IS 3.04±0.08 [1.18±0.03].

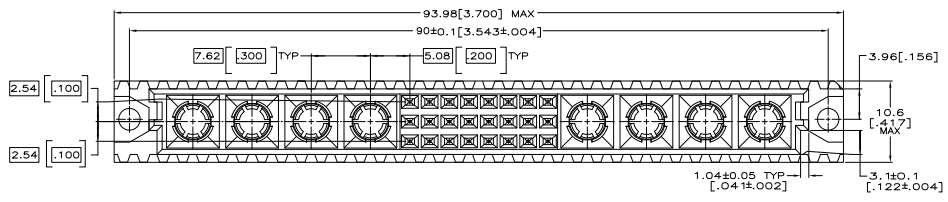

POSITIONS LOADED	ROWS	NO. OF POWER CONTACTS	PART NUMBER
2,5,8,11,22,25,28,31	B	8	148370-3
2,5,8,11,22,25,28,31	B	8	148370-2
2,5,11,22,25,28,31	B	7	148370-1

POSITIONS LOADED	ROWS	NO. OF SIGNAL CONTACTS	PART NUMBER
13-20	C	8	148370-3
NONE	B	0	148370-2
13-20	A	8	148370-1
13-20	C	8	148370-2
13-20	B	8	148370-2
13-20	A	8	148370-1
13-20	C	8	148370-1
13-20	B	8	148370-1
13-20	A	8	148370-1

POSITIONS LOADED	ROWS	NO. OF SIGNAL CONTACTS	PART NUMBER
8			148370-3
8			148370-2
7			148370-1
1		POWER CONTACTS NO REQ'D	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: J. PATTERSON	CHECKED BY: J. PATTERSON	DATE: 11/15/95	REVISED BY: J. PATTERSON	DATE: 11/15/95
APPROVED BY: J. PATTERSON	DATE: 11/15/95	REVISED BY: J. PATTERSON	DATE: 11/15/95	

RECEIPTABLE ASSEMBLY, EUROCARD, TYPE M, 24 POSITION

SIZE: A1 00779 G=148370

REVISED TO: 1