
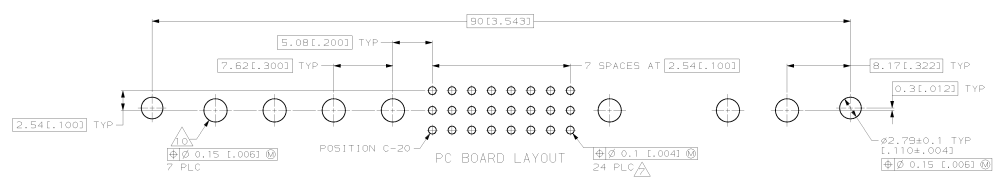
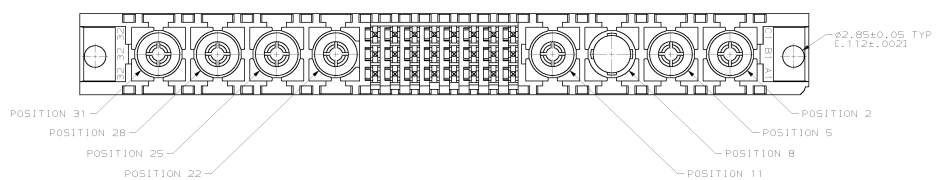

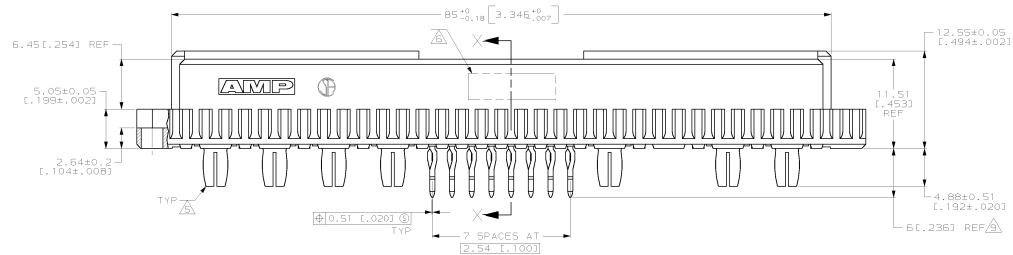


THIS DRAWING IS UNCLASSIFIED
 UNLESS INDICATED OTHERWISE
 DATE 06/20/00 BY 60210/00/00

REVISED		REVISIONS			
NO.	DATE	BY	CHKD.	APP'D.	DESCRIPTION
A	REV PER 0020-0348-98	16/AM/88	BH	LSB	
B	REV PER EC 0621-80-99	06/AM/99	BC	CR	

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ POWER CONTACT MATERIAL: BERYLLIUM COPPER.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA, TIN-LEAD PLATE ON POSTS.
- △ POWER CONTACT FINISH: DIN 41612 CLASS 2 ALL OVER.
- △ PART NUMBER AND DATE CODE HOT STAMPED IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 2.35(1.093) MINIMUM THICK PC BOARD, RECOMMENDED PC BOARD DRILLED HOLES ARE #1.15(0.025)(1.0453±.0010) WITH 0.02(0.001)(0.003) COPPER AND 0.008(0.0003) MINIMUM TIN-LEAD PLATING, FINISHED HOLE AFTER PLATING IS #1.02(0.08)(1.040±.003).
- △ HOT STAMPING ON THIS SIDE.
- △ TAIL LENGTH AFTER SEATING IN PC BOARD.
- △ POWER CONTACTS REQUIRE #3.13(0.08)(1.23±.003) DRILLED HOLE WITH 0.09(0.25)(1.002±.001) THICK COPPER AND 0.13(1.005) MINIMUM TIN-LEAD PLATING, FINISHED HOLE SIZE IS #3.04(0.08)(1.184±.003).

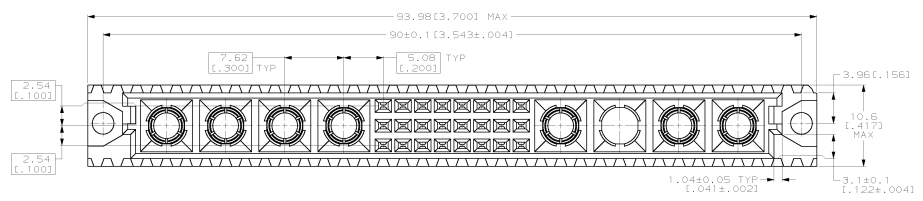

148497-5
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: BRINER 07/79	AMP Incorporated Harrisburg, PA 17105-3608
APPROVED BY: PATTERSON 07/79	DESIGNED BY: PATTERSON 07/79	DATE: 07/79	
REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	RECEPTACLE ASSEMBLY, EUROCARD, PRESS FIT, TYPE M, 24 + 8 POSITIONS
REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	118 ONE ONE DRAWING NO. 148497
REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	REVISED BY: PATTERSON 07/79	DATE: 07/79