



Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans l'autorisation écrite du propriétaire. Property of FCI. Droits de reproduction FCI.



FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written permission of the owner. Property of FCI. Copyright FCI.

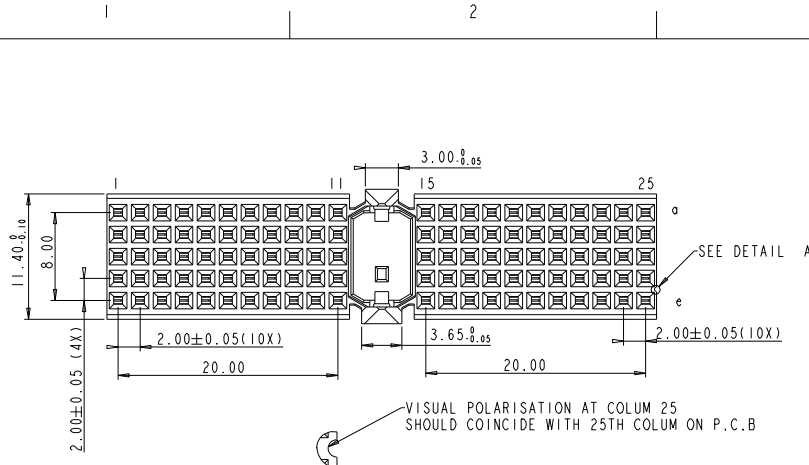

PERFORMANCE CHARACTERISTICS
 CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES**
1. " " LEAD FREE INDICATOR : LF=LEAD FREE
 " " PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

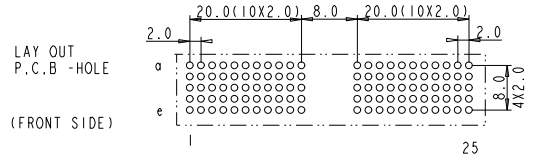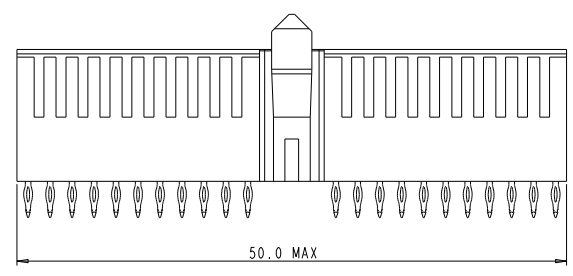

rev	ecn no	dr	date
A	CONVERSION REVISION 04	14-09-01	
B	104-0109	27-11-04	
C	D605-0278	02-08-05	
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		tolerance	projection
Heat treat		100°C±2 100°C 200°C±0.1 200°C ANGLE±0.1° 100°C	MM
Plating/Finish			Scale
Dr M. Fret	30-10-97	Product family MILLIPACS	A4 2.000
Eng		Model Name	ECN
Chr		Model Revision	REL Level
Appr			
FCI	title	MILLIPACS 2/TYPE A (W/O LOC. PEG)/NO SHIELDING	Rev. C
Pro/E file	catalog	HMOS10PES100... CUSTOMER DRAWING	dwg no BSC201907007