
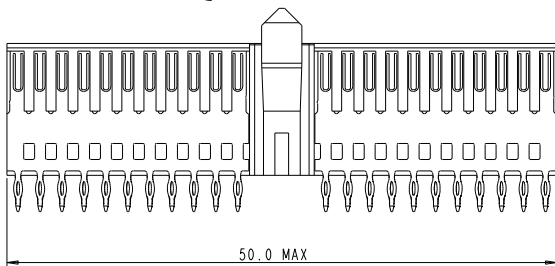


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans l'autorisation écrite du propriétaire. Property of FCI. Droits de reproduction FCI.

**FCI**

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written permission of the owner. Property of FCI. Copyright FCI.

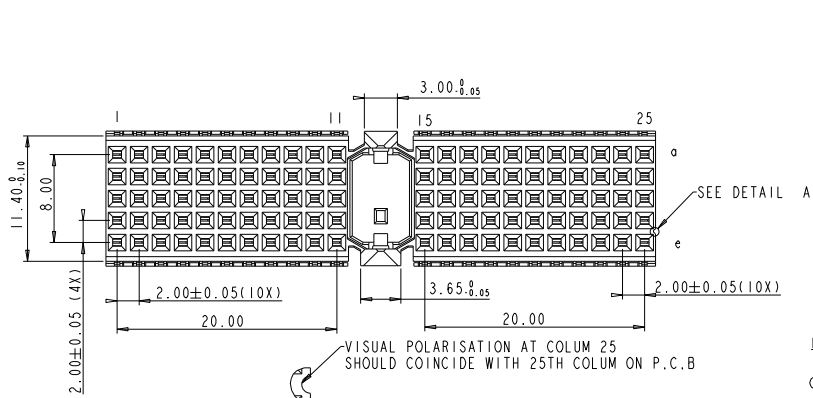

**PERFORMANCE CHARACTERISTICS**


- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- CURRENT RATING 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN

**NOTES**

1. " " LEAD FREE INDICATOR : LF=LEAD FREE  
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY OUT P.C.B -HOLE

(FRONT SIDE)

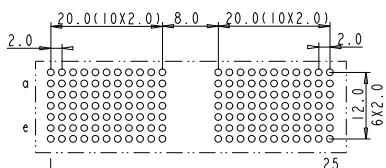

rev	ecn no	dr	date
A	CONVERSION REVISION 04	HN	14-09-01
B	104-0109	HEX	27-11-04
C	D605-0278	ASON	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material	Spec ref		
Mat code	tolerance	projection	MM
Heat treat	100°C±2 100°C 200°C±2 1 200°C ANGLE≤15° HDREIN	⊕	←
Plating/Finish	Dr M.Fret 30-10-97	Product family MILLIPACS	size A4 Scale 2.000
	Eng	Model Name	ECN
	Chr	Model Revision	REL Level
	Appr		
<b>FCI</b>	title	MILLIPACS 2/TYPE A (W/O LOC.PEG)/SHIELDED	Rev. C
Pro/E file	catalog	HMS10PES1Q1... CUSTOMER DRAWING	BSC201907009

PDM: Rev.C

STATUS: Released

Printed: Sep 30, 2005