




Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans la permission écrite du propriétaire. Property of FCI. Droits de reproduction FCI.

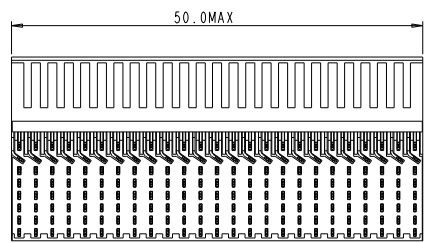

All rights strictly reserved. Reproduction or issue to third parties in any form without the written permission of the owner. Property of FCI. Copyright FCI.

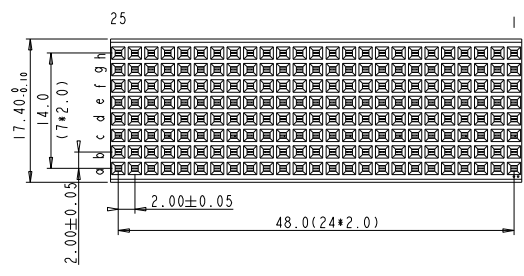


PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES**
- "T" LEAD FREE INDICATOR : LF=LEAD FREE
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
 - THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
 - THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY-OUT P.C.B. -HOLE



rev	ecn no	dr	date
A	CONVERSION REVISION 04	KN	14-09-01
B	0605-0352	WASON	23-09-05
-	-	-	-
-	-	-	-
-	-	-	-
04	REC4_3563 REC9_3525	R.M	22/05/01

Material		Spec ref	
Mat code	Heat treat	tolerance	projection
Plating/Finish	Dr W.Panis	IDECC ±0.2 IDECC ±0.1 Z0EC ±0.1 Z0EC ANGLES ±1°/0.4°/4°	MM
Dr W.Panis	29-04-96	Product family	MILLIPACS
Eng		Model Name	ECN
Chr		Model Revision	REL Level
Appr		size	A4
		Scale	1:500
FCI	MILLIPACS 8+2R RA RCP CONN TYPE E NO SHIELDING	dwg no	BSC202258002
Prof/E file	catalog	HM288PA8100	CUSTOMER DRAWING
			sheet 1 of 1

PDM: Rev.B STATUS: Released