




THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.
 © 2015 TYSI ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
0	REV PER EC 0512-0318-04		DIMAGOS	BC	GS
01	REVISED PER ECO-09-024717		090909	KK	AEG
A	ECR-10-018652		1002710	SW	MCW


**CONNECTOR ASSEMBLY
EXAMPLARY LOADED** ⚠

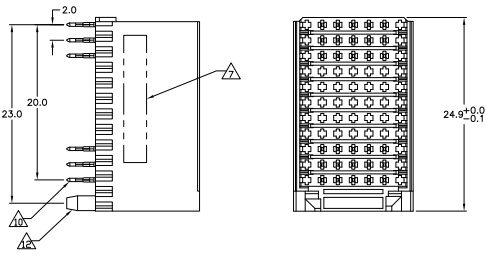


CONTACT DIMENSIONS
SCALE 5:1



CONTACT LAYOUT



**RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN**



PLATED THRU HOLES PARAMETERS

REFERENCE APPLICATION SPECIFICATION

⚠	OBsolete	1-5352408-9
⚠	⚠	6352408-9
⚠	⚠	5352408-4
⚠	⚠	5352408-1
	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY	STAGER	TYSI Electronics Corporation Harrisburg, Pa 17105-3608	
DRAWN BY	DATE	DESIGNED BY	STAGER	DATE	REVISED TO
SEE TABLE	114-19029	108-19082		114-19029	
				DATE	REVISED TO
				100779	5352408
				DATE	REVISED TO
				4.1	1 2 A

THIS DRAWING IS UNAPPROVED FOR PUBLICATION
 BY TYSO ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
AD	00	SEE SHEET 1	-	-

- △ MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT); 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIRONMENT APPLICATIONS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- △ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- △ FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- △ TO BE MEASURED AT BOTTOM OF SHROUD.
- △ LOCATION PEG.
- △ CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT		BY CARRO 07/00/01	BY TYSO	TYSO Electronics Corporation Harrisburg, Pa 17105-3608
APPROVED FOR PUBLICATION		BY SKIFFER 07/00/01	BY SKIFFER	MALE ASSEMBLY, 2-PACK 2mm HM, TYPE C
DIMENSIONS: mm		108-19082	114-19029	SIZE: 00K 00K 00000 00
TOLERANCES: mm		±0.2	±0.2	REVISIONS TO: -
MATERIAL: SEE SHEET 1		SEE SHEET 1	SEE SHEET 1	DATE: 00/00/00
DRAWING: SEE SHEET 1		SEE SHEET 1	SEE SHEET 1	REV: 2 2 A
CUSTOMER DRAWING		A1007791G=5352408		ISS: 4.1