


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
CI		REVISED PER ESD-11-005033	28MR11	RK	HMR

	z	a	b	c	d	e	f
1	A	A	A	A	A		
2	A	A	A	A	A		
3	A	A	A	A	A		
4	A	A	A	A	A		
5	A	A	A	A	A		
6	A	A	A	A	A		
7	A	A	A	A	A		
8	A	A	A	A	A		
9	A	A	A	A	A		
10	A	A	A	A	A		
11	A	A	A	A	A		
12	A	A	A	A	A		
13	A	A	A	A	A		
14	A	A	A	A	A		
15	A	A	A	A	A		
16	A	A	A	A	A		
17	A	A	A	A	A		
18	A	A	A	A	A		
19	A	A	A	A	A		
20	A	A	A	A	A		
21	A	A	A	A	A		
22	A	A	A	A	A		
23	A	A	A	A	A		
24	A	A	A	A	A		
25	A	A	A	A	A		

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

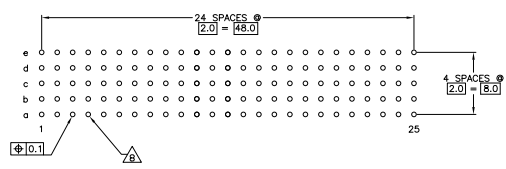

FINISH	PART NUMBER
	3-5100141-0
	4-5100141-9
	5100141-9
	5100141-4
	5100141-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY	REVISIONS	DATE	BY	APP
114-19029	A1	00779	C	5100141

TE Connectivity
MALE ASSEMBLY, 2-PACK 2mm HM, TYPE B

114-19029
REVISED PER ESD-11-005033

CUSTOMER DRAWING

