




THIS DRAWING IS UNPUBLISHED. REVISIONS FOR MODIFICATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK
P1		REVISED FOR ECR-10-01916	DRAM2101	JY SY
R		ECR-10-018652	10SEP10	ISW MQW

**CONNECTOR ASSEMBLY
EXEMPLARY LOADED**

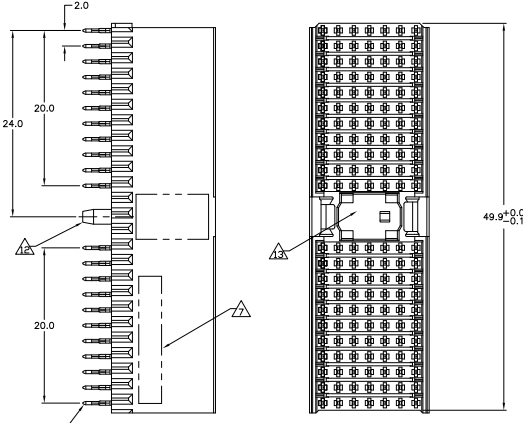


CONTACT DIMENSIONS
SCALE 5:1



CONTACT LAYOUT

	z	a	b	c	d	e	f
1	C	A	A	A	A	A	C
2	C	A	A	A	A	A	C
3	C	A	A	A	A	A	C
4	C	A	A	A	A	A	C
5	C	A	A	A	A	A	C
6	C	A	A	A	A	A	C
7	C	A	A	A	A	A	C
8	C	A	A	A	A	A	C
9	C	A	A	A	A	A	C
10	C	A	A	A	A	A	C
11	C	A	A	A	A	A	C
MULTI PURPOSE CENTER							
15	C	A	A	A	A	A	C
16	C	A	A	A	A	A	C
17	C	A	A	A	A	A	C
18	C	A	A	A	A	A	C
19	C	A	A	A	A	A	C
20	C	A	A	A	A	A	C
21	C	A	A	A	A	A	C
22	C	A	A	A	A	A	C
23	C	A	A	A	A	A	C
24	C	A	A	A	A	A	C
25	C	A	A	A	A	A	C

**RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN**

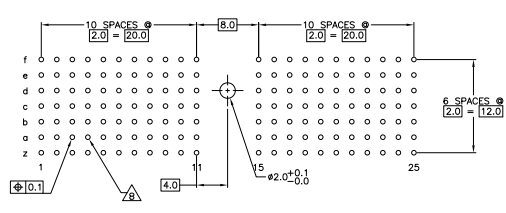

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

3-100668-0
1-100668-9
100668-9
400668-4
100668-1
FINISH
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. TTI Electronics Corporation, Harrisburg, Pa 17105-3608

DATE: 10B-19082
REV: 114-19029
PART: 100779
REV: 1

DESCRIPTION: MALE ASSEMBLY, 2-PACK 2mm HM, TYPE A

REVISED FOR: ECR-10-018652

DATE: 10SEP10

BY: ISW

CHK: MQW

THIS DRAWING IS UNPUBLISHED
 © 2005 TELCORDIA CORPORATION ALL RIGHTS RESERVED
 ALL RIGHTS RESERVED

REVISE		REVISIONS			
NO	DATE	BY	CHK	APP	DESCRIPTION
AD	00				SEE SHEET 1

- △ MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIRONMENT APPLICATIONS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- △ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- △ FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- △ TO BE MEASURED AT BOTTOM OF SHROUD.
- △ POLARIZATION FEATURE.
- △ AREA RESERVED FOR KEYING PART (BASIC P/N 100525).
- △ CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- △ OBSOLETE PART NUMBER.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △ 0.76µm MIN GOLD PLATING AT MATING SURFACES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		TYPE: CUSTOMER DRAWING		DATE: 4-1		SHEET: 2		OF: 2		REV: R	
DIMENSIONS: mm		UNLESS OTHERWISE SPECIFIED		PROJECT: 108-19082		REV: 114-19029		DATE: 100779		DRAWING NO: G=100668	
DRAWN: SEE SHEET 1		CHECKED: SEE SHEET 1		PROJECT: 108-19082		REV: 114-19029		DATE: 100779		DRAWING NO: G=100668	
DATE: 4-1		SHEET: 2		OF: 2		REV: R		DATE: 100779		DRAWING NO: G=100668	