
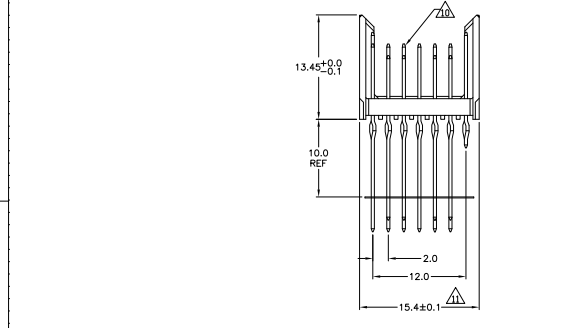



THIS DRAWING IS UNPUBLISHED. REVISIONS FOR INFORMATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
D		REVISED PER ECR 0212-0304-05	15MM06	JDP	GES
E		ECR-10-019054	15SEP10	SW	MOW

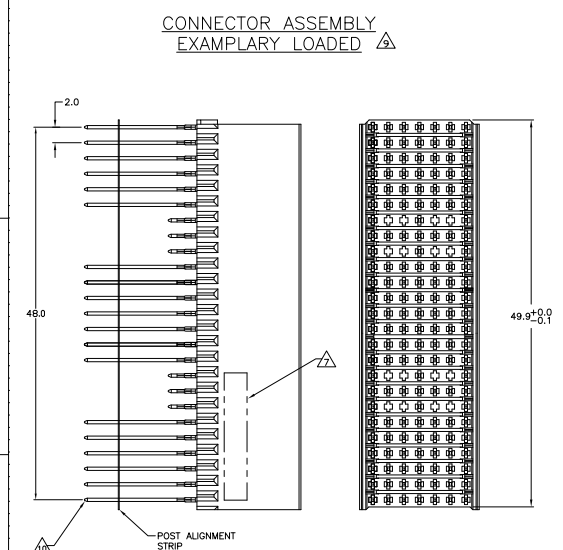

### CONTACT DIMENSIONS

SCALE 5:1

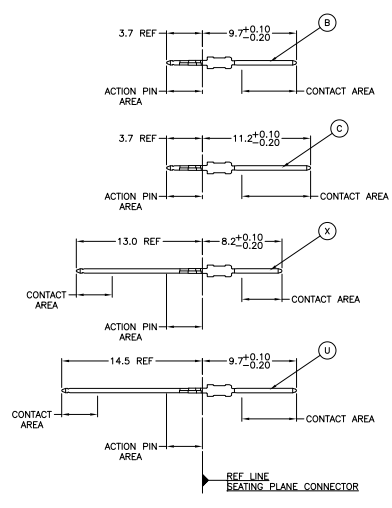

### CONTACT LAYOUT


	z	a	b	c	d	e	f
1	U	X	X	U	X	X	C
2	U	X	X	U	X	X	C
3	U	U	U	U	U	U	C
4	U	X	X	U	X	X	C
5	U	X	X	U	X	X	C
6	U	U	U	U	U	U	C
7	C	C	B	B	B	B	C
8	C	C	B	B	B	B	C
9	C	C	B	B	B	B	C
10	U	U	U	U	U	U	C
11	U	X	X	U	X	X	C
12	U	X	X	U	X	X	C
13	U	U	U	U	U	U	C
14	U	X	X	U	X	X	C
15	U	X	X	U	X	X	C
16	U	U	U	U	U	U	C
17	C	C	B	B	B	B	C
18	C	C	B	B	B	B	C
19	C	C	B	B	B	B	C
20	U	U	U	U	U	U	C
21	U	X	X	U	X	X	C
22	U	X	X	U	X	X	C
23	U	U	U	U	U	U	C
24	U	X	X	U	X	X	C
25	U	X	X	U	X	X	C

### RECOMMENDED PCB-HOLE LAYOUT

COMPONENT SIDE SHOWN

### PLATED THRU HOLES PARAMETERS

REFERENCE APPLICATION SPECIFICATION

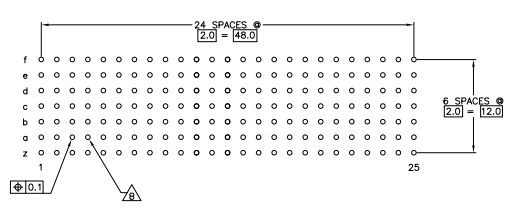

$\Delta$	1-352624-9
$\Delta$	352624-9
$\Delta$	352624-4
$\Delta$	352624-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		E. CARRO		E. CARRO		E. CARRO		E. CARRO		E. CARRO	
DESIGNED BY	108-19082	DATE	114-19029	SIZE	A1	USE SIZE	114-19029	ISSUE NO.	3	REVISED TO	---
APPROVED BY	---	DATE	---	ISSUE NO.	---	REVISED TO	---	CUSTOMER DRAWING	---	SCALE	1:1

REVISE		REVISIONS			
REV	DATE	DESCRIPTION	BY	APP	
AD	00	SEE SHEET 1	-	-	

- MATERIAL:  
CONTACT: PHOSPHOR BRONZE.  
HOUSING: GLASS-FILLED POLYESTER.
- GENERAL PLATING SPECIFICATION: UNDERPLATING  
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION  
PIN: 0.5µm MIN TIN/LEAD.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 1.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3, CENTRAL OFFICE APPLICATIONS.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.  
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS, MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID PATTERN DEFINED BY CONTACT LAYOUT.
- FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- TO BE MEASURED AT BOTTOM OF SHROUD.
- CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT, TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT			DESIGNED BY	REVISED BY	DATE
			J. SKRIPPER	J. SKRIPPER	04/02/92
DRAWN BY			CHECKED BY	APPROVED BY	
C. SKRIPPER					
SCALE			PART NO.		
1:1			108-19082		
DIN			REVISED DATE		
SEE SHEET 1			114-19029		
			CUSTOME DRAWING		
			SIZE: 4.1		
			PAGE: 2 OF 2		
			REV: E		
YTC Electronics Corporation Harrisburg, Pa 17105-3608					
Type Electronics					
MALE ASSEMBLY, 2-PACK 2mm HM, TYPE B					
REVISED TO			DRAWING NO.:		
			A1007791G-352624		