

4



3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIET	REVISIONS					
H	-	F	LR	DESCRIPTION	DATE	BY	APPD
		G3		REVISED PER ECO-10-001916	09MAR2010	JY	SY
		H		ECR-10-018652	10SEP10	SW	MQW

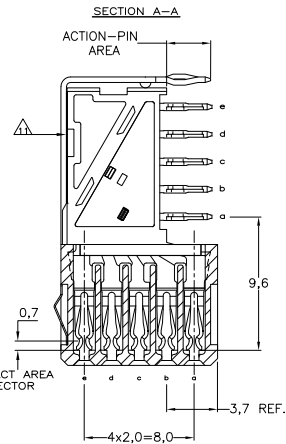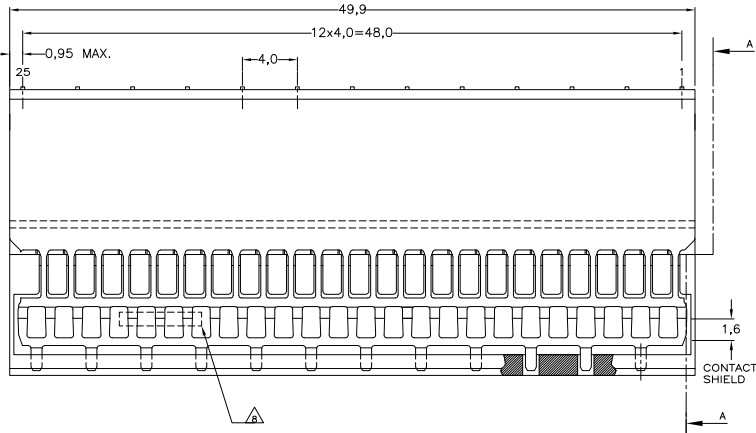

- NOTES:
- △ MATERIAL CONTACTS: PHOSPHORBRONZE
 - △ MATERIAL HOUSING: GLASSFILLED POLYESTER (GRAY)
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN.
 - △ FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ PLATING SHIELD CONTACT AREA : 0,76µm Au MIN. ACTION PIN : 0,5µm SnPb MIN. REMAINDER : Ni
 - △ ASSEMBLY PRINTED WITH P/N AND DATECODE THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B 125 PLATED THROUGH HOLES AT 2x2mm SQUARE GRID
 - △ ROW "Y" 13 PLATED THROUGH HOLES FOR UPERSHIELD
 - △ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - 12. BASIC P.N. LOWERSHIELD: 338110
 - △ 0.76µm MIN GOLD PLATING AT MATING SURFACES.

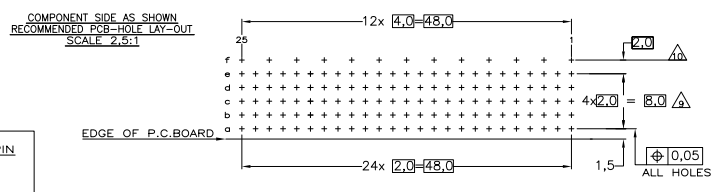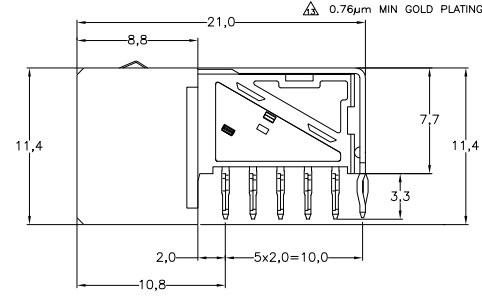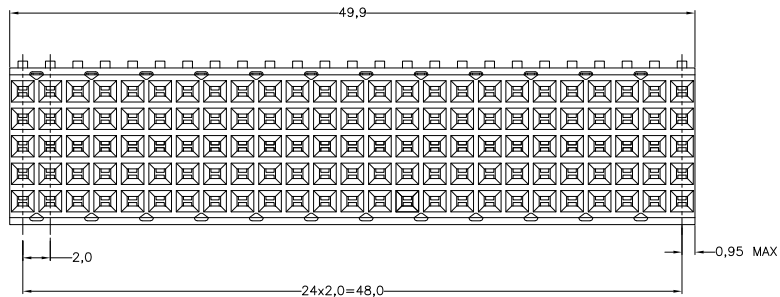

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM. D. TRUREN 20MAY97

DIMENSIONS: mm	FOR FINISHES SEE SPEC. OTHER FINISHES: 30.2	PRODUCT SPEC: 108-19082	APPLICATION SPEC: 114-19029	WEIGHT: -	SIZE: A2	CAGE CODE: 00779	TRADING NO: C=352069	RESTRICTED TO: -
MATERIAL: -	FINISH: -	CUSTOMER DRAWING		SCALE: NTS	SHEET: 1	OF: 1	REV: H	

3-352069-0
 352069-9
 352069-4
 352069-1

FINISH MATERIAL PARTNUMBER

Tyco Electronics Corporation
 s-Hertogenbosch, Netherlands.

Z-PACK 2MM HM
 TYPE B - 25 COLUMNS
 PRE-SHIELDED RECEPTACLE

AMP 1471-9 REV 31MM2000

352069

B

A