

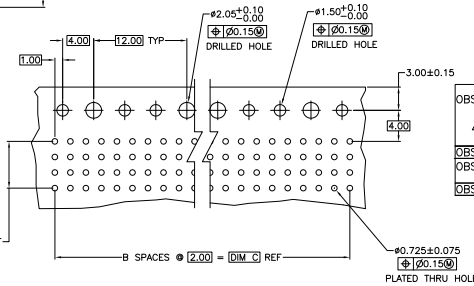
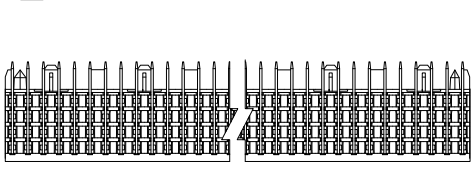
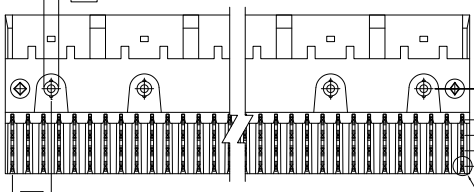
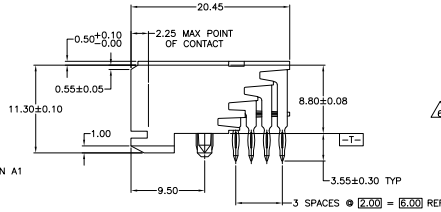
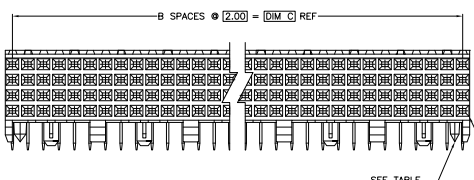


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00				
B1		REVISED PER ECO-08-009162	17MPOH	DH	AS
B2		REVISED PER ECO-10-00044	18AM10	KK	HMR

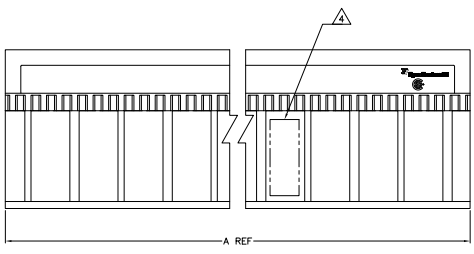

RECOMMENDED CIRCUIT PATTERN
 PER IPC-D300 TYPE II, CLASS C
 (COMPONENT SIDE)

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250, COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR-BRONZE.
- △ CONTACT FINISH:
 UNDERPLATE (ENTIRE CONTACT) - 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290.
 ON MATING SURFACES- CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT
 ON LEADS- 0.0006 MIN TIN PER ASTM B 545, OVER UNDERPLATE LUBRICATION (MIN MATING SURFACES) SURFACE CONDITIONER AFTER PLATING.
- △ PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
- △ CONTACT FINISH:
 UNDERPLATE (ENTIRE CONTACT) - 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290.
 ON MATING SURFACES- 0.00076 MIN NICKEL OR COBALT HARDENED GOLD PER ASTM B-488 OVER UNDERPLATE.
 ON LEADS- 0.0006 MIN TIN PER ASTM B 545, OVER UNDERPLATE LUBRICATION (MIN MATING SURFACES) SURFACE CONDITIONER AFTER PLATING.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

NO	46	23	47.88	96	3-5536511-3	
OBSOLETE	NO	22	1.1	23.88	48	3-5536511-2
	YES	10	5	11.88	24	3-5536511-1
	NO	34	17	35.88	72	4-5536511-2
	NO	130	65	131.88	264	4-5536511-1
OBSOLETE	NO	106	53	107.88	216	4-5536511-0
OBSOLETE	NO	118	59	119.88	240	5-5536511-9
	NO	82	41	83.88	168	5-5536511-8
	NO	66	33	67.88	136	5-5536511-7
OBSOLETE	NO	58	29	59.88	120	5536511-6
	NO	70	35	71.88	144	5536511-5
	NO	94	47	95.88	192	5536511-4
	NO	46	23	47.88	96	5536511-3
	NO	22	11	23.88	48	5536511-2
	YES	10	5	11.88	24	5536511-1

POSITIONING PEGS	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. **TEL** TELCORDIA ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3008
 DATE: 10/20/08
 DRAWN BY: R. BEZT
 CHECKED BY: R. BEZT
 APPROVED BY: R. BEZT
 CUSTOMER DRAWING
 SIZE: 4.1
 SHEET: 1 OF 1
 REV: B2