


REVISED PER		DATE	BY	APP'D
AD	00			

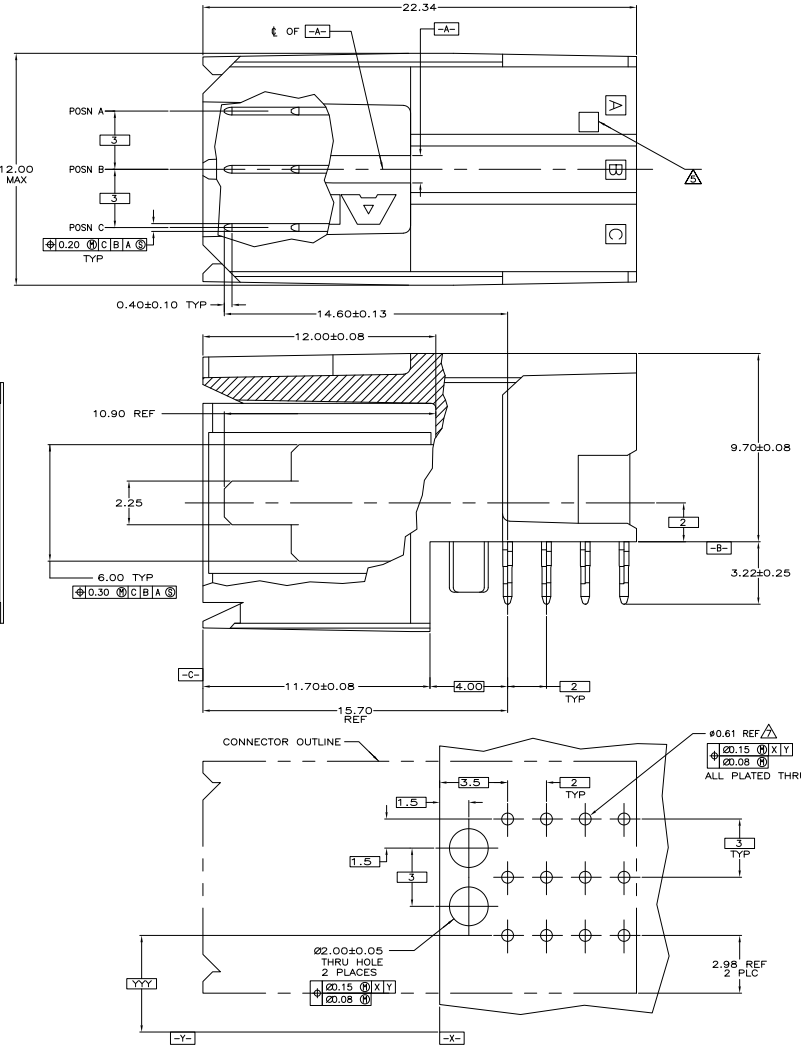

- △ MATERIAL: HOUSING: POLYESTER, COLOR: GRAY, UL 94V-0.
CONTACT: PHOSPHOR BRONZE.
 - △ FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER
0.76µm MIN PALLADIUM-NICKEL.
ACTION PIN AREA: 0.5µm MIN TIN-LEAD PLATE,
ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
 - △ FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE: TR-NWT-001217, ISSUE 1, SEPTEMBER 1992.
 - △ MATERIAL: HOUSING: LCP; COLOR: RED, UL 94V-0.
CONTACT: PHOSPHOR BRONZE.
 - △ NUMBER "3" MARKED IN THIS AREA.
 - △ MATERIAL: HOUSING: POLYESTER, COLOR: GRAY, UL 94V-0.
CONTACT: HIGH CURRENT COPPER ALLOY.
 - △ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU
HOLE DIAMETER AND PLATING THICKNESSES.
8. CURRENT RATING 10A/CONTACT FOR PHOS BRONZE CONTACTS AND
 16A/CONTACT FOR HIGH CURRENT COPPER ALLOY CONTACTS PER PRODUCT
 SPEC 108-1651.

RECOMMENDED PCB HOLE LAYOUT

MATERIAL/FINISH	PART NUMBER
△ △ △ △	5-223961-1
△ △ △ △	223961-8
△ △ △ △	223961-2
△ △ △ △	223961-1

REVISIONS	DATE	BY	APP'D
1			

DATE	DESCRIPTION	BY	APP'D
000779	ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE		