

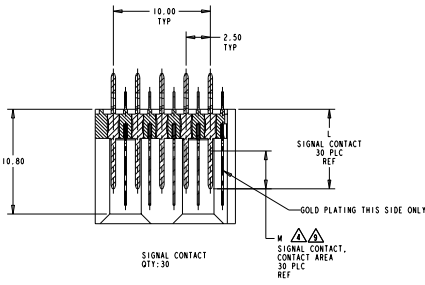

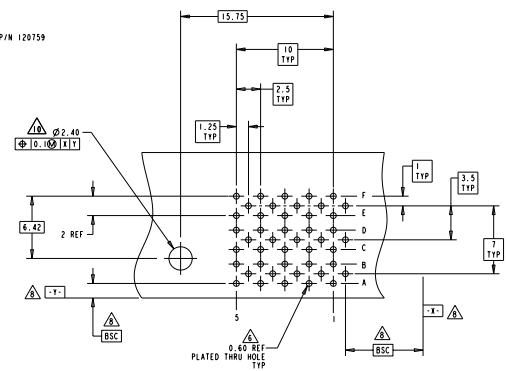


REV	DATE	DESCRIPTION	BY	CHK	APP
01		REV PER ECO-M-024578	ZIMMERT	JRP	BAP
02		REVISED PER ECO-99-025689	HOECHER	KK	AEQ

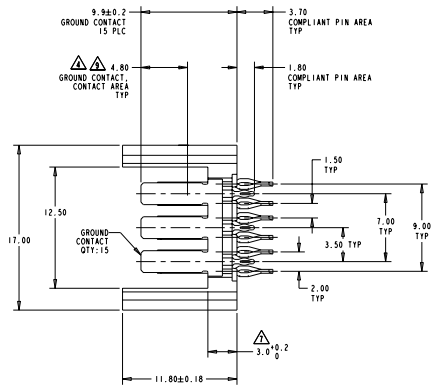

- ⚠ PHOSPHOR BRONZE
- ⚠ LCP, UL94V-0
- ⚠ 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL UNDERPLATE OR GOLD FLASH OVER 0.76µm MIN PALLADIUM-NICKEL OVER 1.27µm MIN NICKEL UNDERPLATE ON CONTACT AREA. 0.76µm MIN TIN LEAD OVER 1.27µm MIN NICKEL ON COMPLIANT PIN AREA
- ⚠ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- ⚠ REFERENCE APPLICATION SPEC 114-1302 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS:
- ⚠ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- ⚠ DATINGS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- ⚠ CONTACT AREA LUBRICATED WITH BELLECORD APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- ⚠ HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759 CLEARANCE FOR M3x0.5 THREAD
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

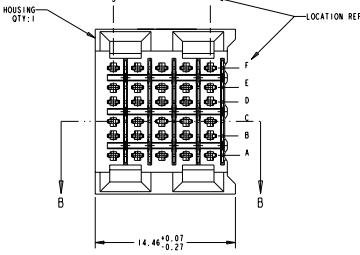

⚠ OBSOLETE	5.30	9.7	5120677-2
	3.90	8.2	5120677-1
	M	L	PART NUMBER

DATE: 07DEC04 DRAWN BY: PATTERSON		DATE: 07DEC04 CHECKED BY: PATTERSON		DATE: 07DEC04 CUSTOMER DRAWING	
PART NUMBER: 5120677-1 REV: A		PART NUMBER: 5120677-2 REV: A		PART NUMBER: 5120677-1 REV: A	
TITLE: HEADER ASSEMBLY, 30 POSITION, RIGHT HAND, 8 ROW, 2 PACK MS3		SCALE: 1:1		SHEET: 1 OF 1	