

British Plug Top Fuse

Fast/Medium

TDC180



Catalog Symbol: TDC180 (8AG)
FAST/MEDIUM BRITISH PLUG TOP FUSE
 240Vac
 BS1362, IEC 269-3A

Electrical Ratings (Catalog Symbol and Amperes)

| 240Vac | | |
|-----------|------------|------------|
| TDC180-1A | TDC180-5A | TDC180-13A |
| TDC180-2A | TDC180-7A | — |
| TDC180-3A | TDC180-10A | — |

| Rated Current | Rated Volt AC | Breaking Capacity | Power Dissipation Max. | Color | Approvals |
|---------------|-------------------|---|------------------------|-------|------------------|
| 1A | 240 (264 max.) | 6000A 264VAC, 50Hz p.f. 0.3 - 0.4 | 1 Watt | Black | Asta, BSI CCC |
| 2A | | | | Black | |
| 3A | | | | Red | |
| 5A | | | | Black | |
| 7A | | | | Black | |
| 10A | | | | Black | |
| 13A | | | | Brown | |


- **Type TDC180.**
- 1/4" x 1" fast/medium British plug top fuse.
- Ceramic tube - end caps: silver-plated copper.
- Packaging: x 10, x 100, x 1000.
- Weight: 2.25g +/- 0.15g (2A to 13A inclusive)

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Complies with EU Directive 2002/95/EC (RoHS)




Dimensional Data

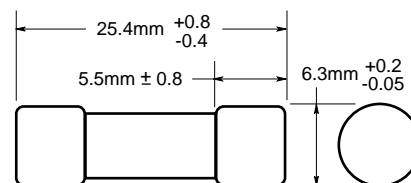

Limits for Pre-arcing Time

| In | 1.0 In. | 1.6 In. | 1.9 In. |
|----------|------------|---------|---------|
| | MIN | MIN | MAX |
| 1A - 13A | 1000 hours | 30 min. | 30 min. |

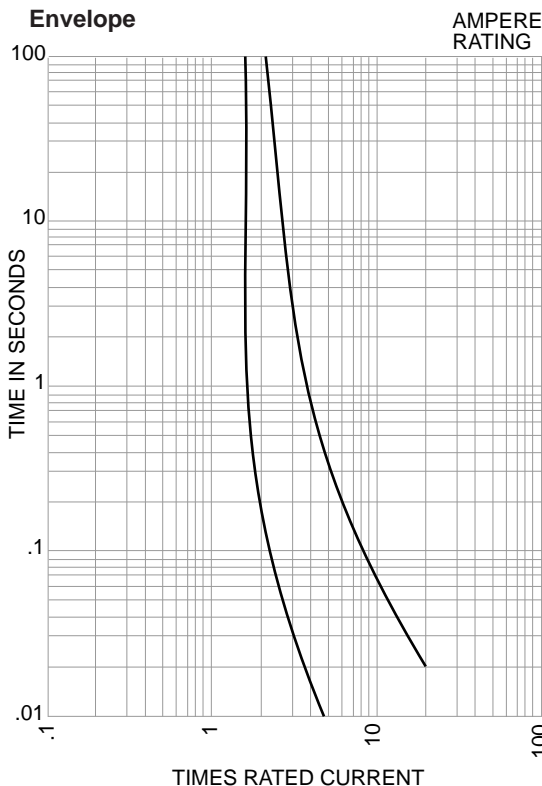

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.