


4

3


2

1


THIS DRAWING IS UNCLASSIFIED
 (C) COPYRIGHT © BY AMP INCORPORATED. ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION

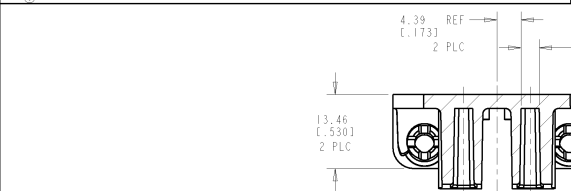



SECTION X-X




SECTION W-W



SECTION Y-Y





VIEW Z-Z

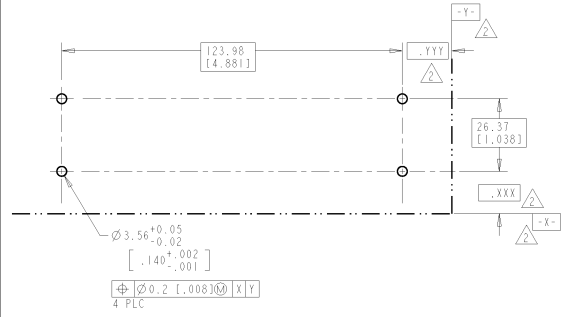

RECOMMENDED PC BOARD LAYOUT
 RECOMMENDED THICKNESS 1.57±0.15 [0.062±.006]
 SCALE 1:1

REV	DATE	DESCRIPTION	BY	CHKD	APVD
0		RELEASED	090498	AV	VR
A		REVISED PER EC 0651 0000 98	100498	AV	VR
A1		REVISED PER ECD-09-027197	100609	KK	AEG

- ⚠ RETENTION MODULE: POLYCARBONATE, BLACK, UL 94-V0 RATED; SLOTTED CAPTIVE FASTENER: BRASS-COPPER ALLOY.
- ⚠ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- ⚠ KIT CONSISTS OF 2 MODULES, 2 MODULES ARE REQUIRED FOR ONE PROCESSOR.
- ⚠ CONSISTS OF ONLY ONE MODULE, 2 MODULES ARE REQUIRED FOR ONE PROCESSOR.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



OBSELETE	DESCRIPTION	PART NO
⚠	2 MODULES WITH FASTENERS AND 2 STUD BRIDGES	145342-3
⚠	1 MODULE WITH FASTENERS	145342-2
⚠	2 MODULES WITH FASTENERS	145342-1

DIMENSIONS: mm (INCH)		DIMENSIONS: mm (INCH)	DIMENSIONS: mm (INCH)
0 PLC	±	0 PLC	±
1 PLC	±	1 PLC	±
2 PLC	±	2 PLC	±
3 PLC	±	3 PLC	±
4 PLC	±	4 PLC	±
ANGLES	±	ANGLES	±
FINISH	±	FINISH	±

OWN: A. VASILINDER CBY: A. VASILINDER DTP: V. RUMINSKI DRAWN: - CHECKED: - APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING: -	OSMAT98 OSMAT98 OSMAT98 OSMAT98 OSMAT98 OSMAT98 OSMAT98 OSMAT98	AMP Incorporated Harrisburg, PA 17105-3600 RETENTION MODULE KIT WITH CAPTIVE FASTENERS SIZE: A2 CASE CODE: 00778 DRAWING NO: 145342 SCALE: 2:1 SHEET: 1 OF 1 REV: A1
---	--	---