
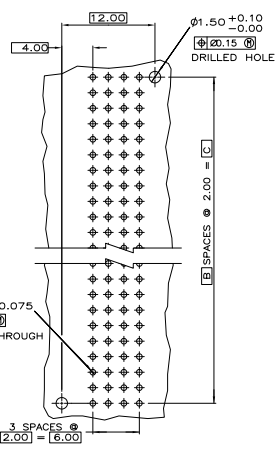







REV	DATE	DESCRIPTION	BY	CHK	APP
AD	47				
G		REVISED PER ECO-05-01006			



0.725 ±0.075
 0.15
 PLATED THROUGH HOLE

RECOMMENDED CIRCUIT PATTERN
 PER IPC-D300 TYPE II, CLASS C
 (COMPONENT SIDE)

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
 COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE PER UNS ALLOY NO. C51100, TEMPER: H04.
- △ CONTACT FINISH:
 UNDERPLATE (ENTIRE CONTACT):
 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
 ON MATING SURFACES:
 FLASH GOLD PER ASTM B 488, OVER
 0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
 0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
 ON LEADS:
 0.00381 MIN TIN-LEAD OVER UNDERPLATE.
 LUBRICATION (MIN MATING SURFACES)
 SURFACE CONDITIONER AFTER PLATING.
- △ PART MARKING LOCATED APPROXIMATELY AS SHOWN.



ROW	D	C	B	A
CA				
CC				
CA				

1 2 3 4 5 6
 POWER POSITION

CODE LETTER	MATING POST LENGTH (0.1)	LEAD LENGTH (REF)
CC	8	4.25
CA	6.5	4.25

6	1	10	5	11.88	△	8	536627-1
E	D	C	B	A	FINISH	NO OF POWER POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. REVISED: 11/20/13
 INCHES: 0.0010
 DIMENSIONS: 0.0010
 TOLERANCES: 0.0010
 SURFACE FINISH: 0.0010
 MATERIAL: 0.0010
 PART: 0.0010
 CUSTOMER DRAWING

ASSEMBLY, PIN, POWER, VERTICAL
 Z-PACK 2mm FL, 4 ROW,
 SOLDER LEADS, SEQUENCED BY ROW

DATE: 11/20/13
 DRAWING NO: 00779
 G=536627

REVISED TO: 11/20/13
 SHEET: 4.1
 OF: 1
 BY: G