
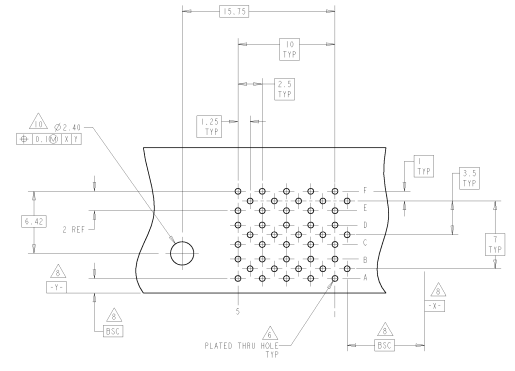
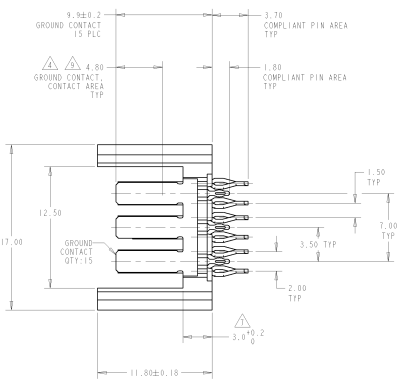
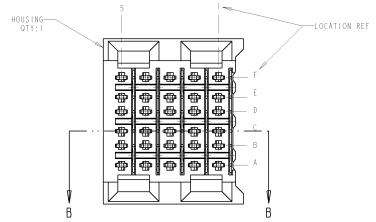


8	7	6	5	4	3	2	1
DATE REVISIONS BY: [REDACTED]	REVISED FOR: [REDACTED]						
AD	00						

REV. NO.		DESCRIPTION	DATE	BY	CHKD	APPD
0	00	REV PER EC 0512-0324-04				

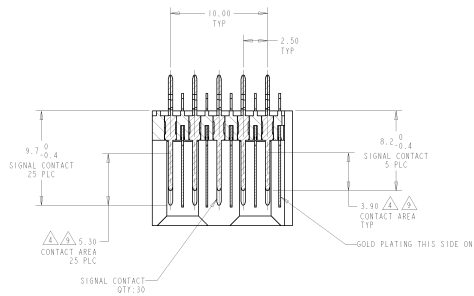

- ▲ PHOSPHOR BRONZE
- ▲ GLASS FILLED POLYESTER
- ▲ 0.05µm MIN GOLD OVER 1.27µm MIN NICKEL ON CONTACT AREA
- ▲ 0.18µm MIN TIN OVER 1.27µm MIN NICKEL IN COMPLIANT PIN AREA.
- ▲ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- ▲ REFERENCE APPLICATION SPEC 112-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- ▲ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD.
- ▲ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ▲ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: 68-1217-CORE, ISSUE 1, NOVEMBER 1995.
- ▲ HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759. CLEARANCE FOR M3x0.5 THREAD.

DATE: 05/12/04
 FILE: 5120839.DWG

ROWS A,B,D,E,F SIGNAL CONTACT TYPE B QTY: 25 LENGTH REF		ROW C SIGNAL CONTACT TYPE A QTY: 5 LENGTH REF		5120839-1 PART NUMBER
CARLOS: [REDACTED] DATE: [REDACTED] PARTITION: [REDACTED]		[REDACTED] DATE: [REDACTED] PARTITION: [REDACTED]		Tyco Electronics HARRISBURG, PA 17110-8800
MATERIAL: [REDACTED] CONTACTS: [REDACTED]		HEADLINE: [REDACTED] PART: [REDACTED]		HEADER ASSEMBLY, 30 POSITION, SEQUENCED, RIGHT HAND, 6 ROW, 2-PACK RES.
CUSTOMER DRAWING: [REDACTED]		A 00778 5120839		PART NUMBER PART NUMBER