


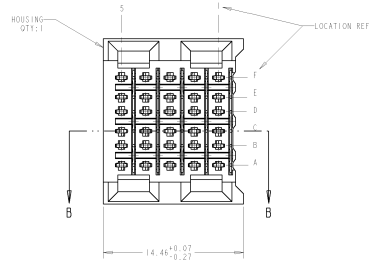
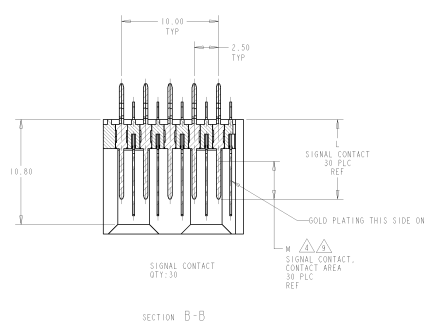


REV. NO.		DESCRIPTION		DATE	BY	CHKD.	APP.
AD	47	REV PER ECO-06-024579					

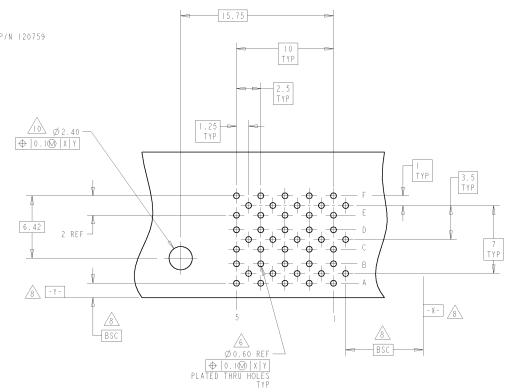

- △ PHOSPHOR BRONZE
- △ LCP, UL94V-0
- △ 0.16µm MIN GOLD OVER 1.27µm MIN NICKEL UNDERPLATE OR GOLD FLASH OVER 0.76µm MIN PALLADIUM-NICKEL OVER 1.27µm MIN NICKEL UNDERPLATE ON CONTACT AREA, 0.16µm MIN TIN LEAD OVER 1.27µm MIN NICKEL ON COMPLIANT PIN AREA
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- △ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- △ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- △ DATINGS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- △ HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759 CLEARANCE FOR M3x0.5 THREAD

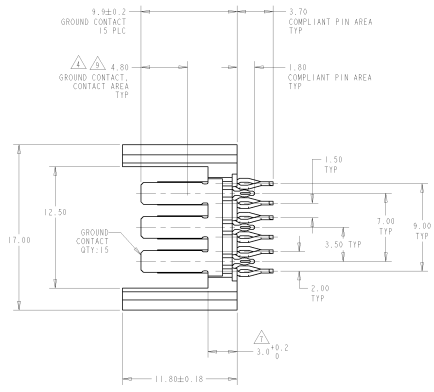

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.30	9.1	120677-2
3.90	8.2	120677-1
M	L	PART NUMBER

DATE PREPARED BY: DATE CHECKED BY: APPROVED BY: PART NUMBER: QUANTITY: DRAWING NO.:		DATE: 5-20-99 BY: [Signature] CHECKED: 5-20-99 BY: [Signature] DRAWING NO.: REVISIONS: PART NUMBER: A 00778 (2-124677) CUSTOMER DRAWING:	Stycor Thin Electronics Harrisburg, PA 17105-1808 HEADER ASSEMBLY, 30 POSITION, RIGHT HAND, 6 ROW, 2-PACK, RES PART NUMBER: A 00778 (2-124677)
---	--	---	--