

REV	DATE	BY	CHKD	DESCRIPTION
AD	00	F	TY	
		E		REV PER ECD-09-017141





△ MATERIAL: HOUSING: POLYESTER, COLOR: GRAY, UL 94V-0.
 CONTACT: PHOSPHOR BRONZE.

△ FINISH: CONTACT MATING AREA: 1.27μm MIN GOLD OR 0.08μm MIN GOLD OVER 0.76μm MIN PALLADIUM-NICKEL ACTION PIN AREA: 0.5μm MIN TIN LEAD PLATE, ALL OVER 1.27μm MIN NICKEL UNDERPLATE.

△ FINISH: CONTACT LUBRICATION WITH BELCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: IR-NMT-001217 ISSUE 1, SEPT 1992.

△ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

5. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1851.

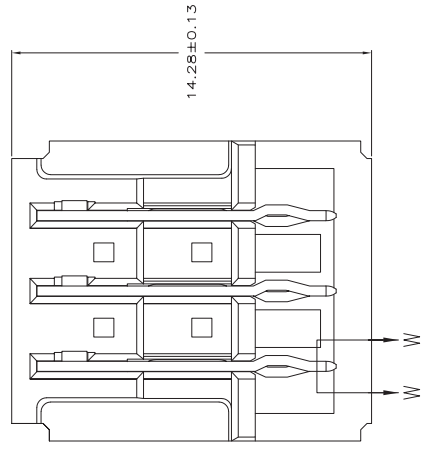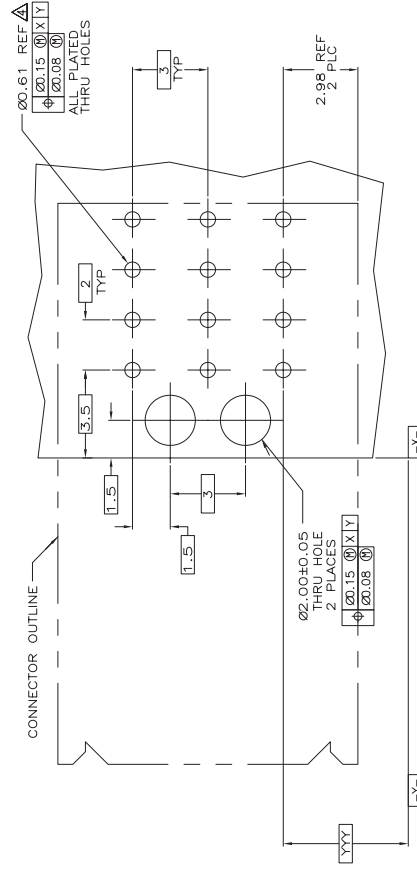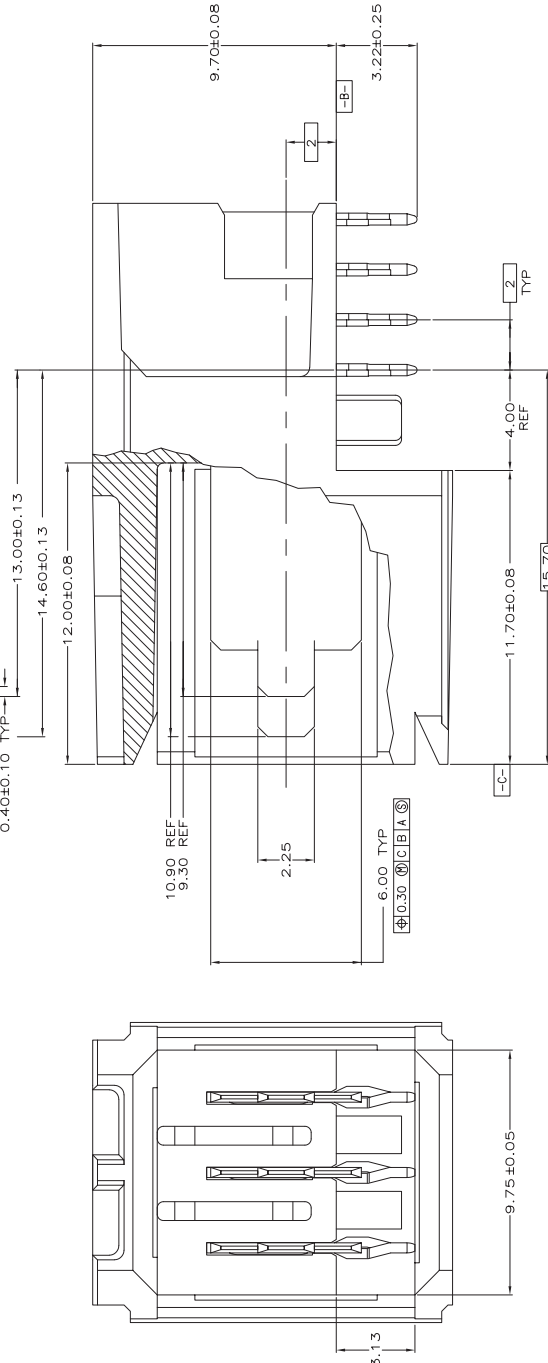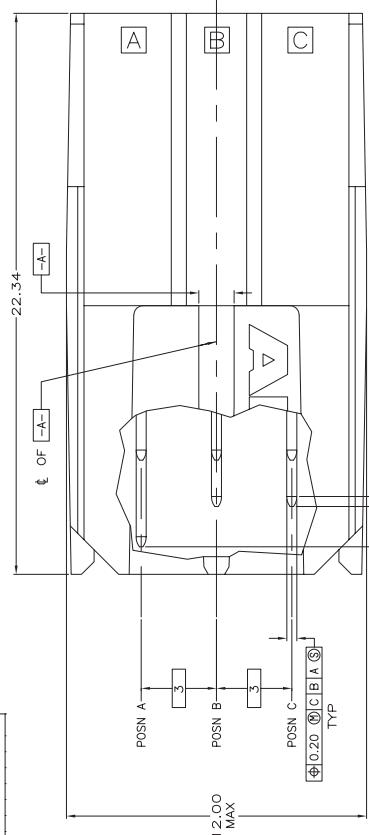

SECTION W-W
 SCALE: 40:1

223968-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNER: J.M. BUCKNER
 DRAFTER: J.M. BUCKNER
 CHECKER: J.M. BUCKNER
 APPLICATOR SPEC: A100779

REGISTRATION: REG-1, REG-2, REG-3, REG-4, REG-5, REG-6, REG-7, REG-8, REG-9, REG-10, REG-11, REG-12, REG-13, REG-14, REG-15, REG-16, REG-17, REG-18, REG-19, REG-20

REVISED TO: REV 1

DATE: 10/11/00

BY: J.M. BUCKNER

CHKD BY: J.M. BUCKNER

DATE: 10/11/00

REV: 1

REG: 1

REG: 2

REG: 3

REG: 4

REG: 5

REG: 6

REG: 7

REG: 8

REG: 9

REG: 10

REG: 11

REG: 12

REG: 13

REG: 14

REG: 15

REG: 16

REG: 17

REG: 18

REG: 19

REG: 20

REG: 21

REG: 22

REG: 23

REG: 24

REG: 25

REG: 26

REG: 27

REG: 28

REG: 29

REG: 30

RECOMMENDED PCB HOLE LAYOUT