
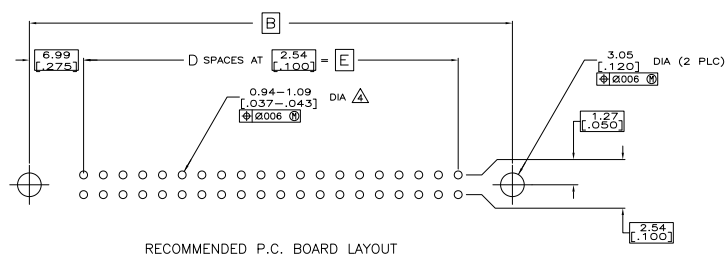

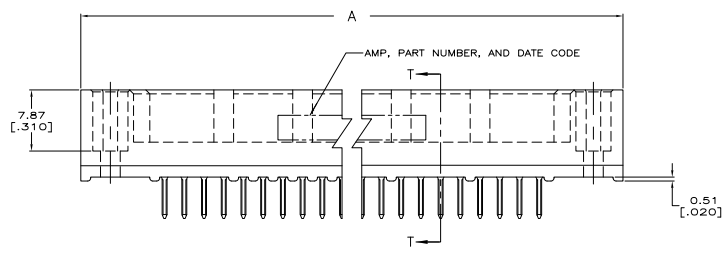


THIS DRAWING IS UNPUBLISHED  
 UNLESS INDICATED OTHERWISE  
 © 2008 TYS ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
N1	REV PER ECO-07-00206		DIMAS2007	BC AS
N2	REVISED PER ECO-09-021826		OBANNO	KK AEG

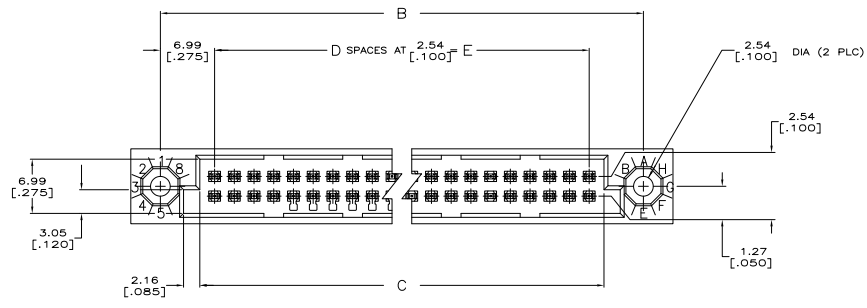

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY	DATE	TYS Electronics Corporation Harrisburg, PA 17105-3608	
DRAWN BY		APPROVED BY	DATE	HDI, 2 ROW, PIN ASSEMBLY, 4.83 [190] LONG SOLDER PINS, 00076 [000030] GOLD PLATE	
CHECKED BY		DATE	SIZE	DRAWING ID	REVISIONS
CUSTOMER DRAWING			A1	00779	0532430
			SHEET	4.1	1 2 N2

THIS DRAWING IS UNPUBLISHED. REVISIONS FOR VARIATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
00		SEE SHEET 1			

- △ HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED POSTS.
- △ SOLDER PIN POST RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94-1.09 [.037-.043]; RECOMMENDED PAD DIA IS 1.52 [.060].
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ PART NUMBER IS OBSOLETE.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ 251.46 [9.900]	-99	255.27 [10.050]	265.43 [10.450]	273.05 [10.750]	-200	1-532430-9
△ 238.76 [9.400]	-94	242.57 [9.550]	252.75 [9.950]	260.35 [10.250]	+90	1-532430-8
△ 226.06 [8.900]	-89	229.87 [9.050]	240.03 [9.450]	247.65 [9.750]	+80	1-532430-7
△ 213.36 [8.400]	-84	217.17 [8.550]	227.33 [8.950]	234.95 [9.250]	+70	1-532430-6
△ 200.66 [7.900]	-79	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	+60	1-532430-5
187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	150	1-532430-4
△ 175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	140	1-532430-3
△ 162.56 [6.400]	-64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	+30	1-532430-2
△ 149.86 [5.900]	-59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	+20	1-532430-1
137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	110	1-532430-0
△ 124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	100	532430-9
△ 111.76 [4.400]	-44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	-90	532430-8
△ 99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	80	532430-7
△ 86.36 [3.400]	-34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	-70	532430-6
△ 73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	60	532430-5
△ 60.96 [2.400]	-24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	-50	532430-4
△ 48.26 [1.900]	19	52.07 [2.050]	62.23 [2.450]	69.85 [2.750]	40	532430-3
△ 35.56 [1.400]	14	39.37 [1.550]	49.53 [1.950]	57.15 [2.250]	30	532430-2
△ 22.86 [0.900]	-9	26.67 [1.050]	36.83 [1.450]	44.45 [1.750]	-20	532430-1

△ OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY: KIEBLER	DATE: 8-17-82	REVISED BY: KIEBLER	DATE: 8-17-82
DRAWING LABEL: HSI, 2 ROW, PIN ASSEMBLY, 4.83 [190] LONG SOLDER PINS, .00076 [000030] GOLD PLATE		Tels Electronics Corporation Harrisburg, PA 17105-3608			
PROJECT FILE: 100779		DRAWING NO: 532430			
CUSTOMER DRAWING		REVISED TO: 2			