

# LH0080 Z80 CPU Central Processing Unit

## ■ Description


The LH0080 Z80 CPU (Z80 CPU for short below) is a general-purpose 8-bit microprocessor fabricated using an N-channel silicon-gate process.

The LH0080A Z80A, LH0080B Z80B, LH0080E Z80E CPU are the high speed version which can operate at the 4MHz, 6MHz and 8MHz system clock, respectively.

## ■ Features

1. 8-bit parallel processing microprocessor
2. N-channel silicon-gate process
3. 158 instructions (The instruction of the 8080A are included as a subset ; 8080A software compatibility is maintained)
4. 22 registers
5. The capability of 3 modes maskable interrupt and non-maskable interrupt
6. On-chip dynamic memory refresh counter
7. Instruction fetch cycle : 1.6  $\mu$ s(Z80), 1.0  $\mu$ s (Z80A), 0.67  $\mu$ s (Z80B), 0.5  $\mu$ s (Z80E)
8. Single +5V power supply and single phase clock
9. All inputs and outputs fully TTL compatible
10. 40-pin DIP (DIP40-P-600)  
44-pin QFP (QFP44-P-1010A)  
44-pin QFJ (QFJ44-P-S650)

## ■ Pin Connections

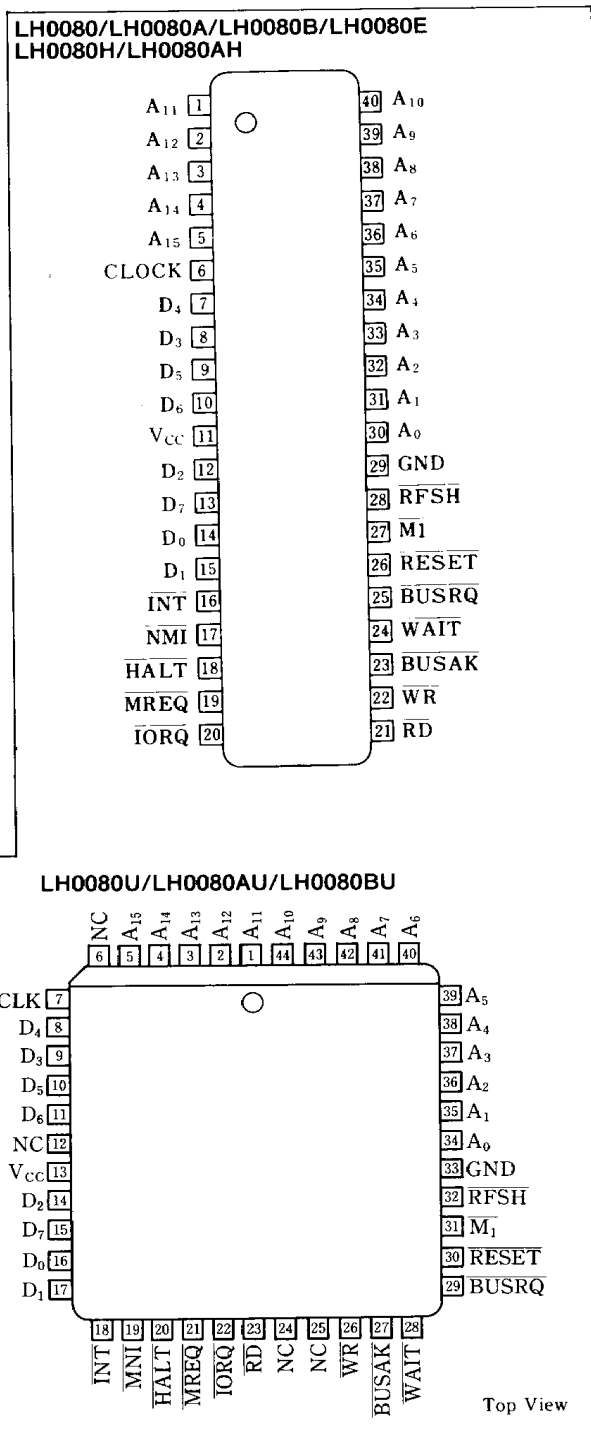

\* The GND pins must be connected to the GND level.




Ordering Information

| Product         | Z80 CPU  | Z80A CPU  | Z80B CPU | Z80E CPU | Package    | Operating temperature |
|-----------------|----------|-----------|----------|----------|------------|-----------------------|
| Clock frequency | 2.5MHz   | 4MHz      | 6MHz     | 8MHz     |            |                       |
| Model No.       | LH0080   | LH0080A   | LH0080B  | LH0080E  | 40-pin DIP | 0°C to +70°C          |
|                 | LH0080H* | LH0080AH* |          |          |            | -20°C to +85°C        |
|                 | LH0080M  | LH0080AM  |          |          | 44-pin QFP | 0°C to +60°C          |
|                 | LH0080U  | LH0080AU  | LH0080BU |          | 44-pin QFJ | 0°C to +70°C          |

\* H suffix is a wide temperature spec, packaged in 40-pin DIP.

Block Diagram

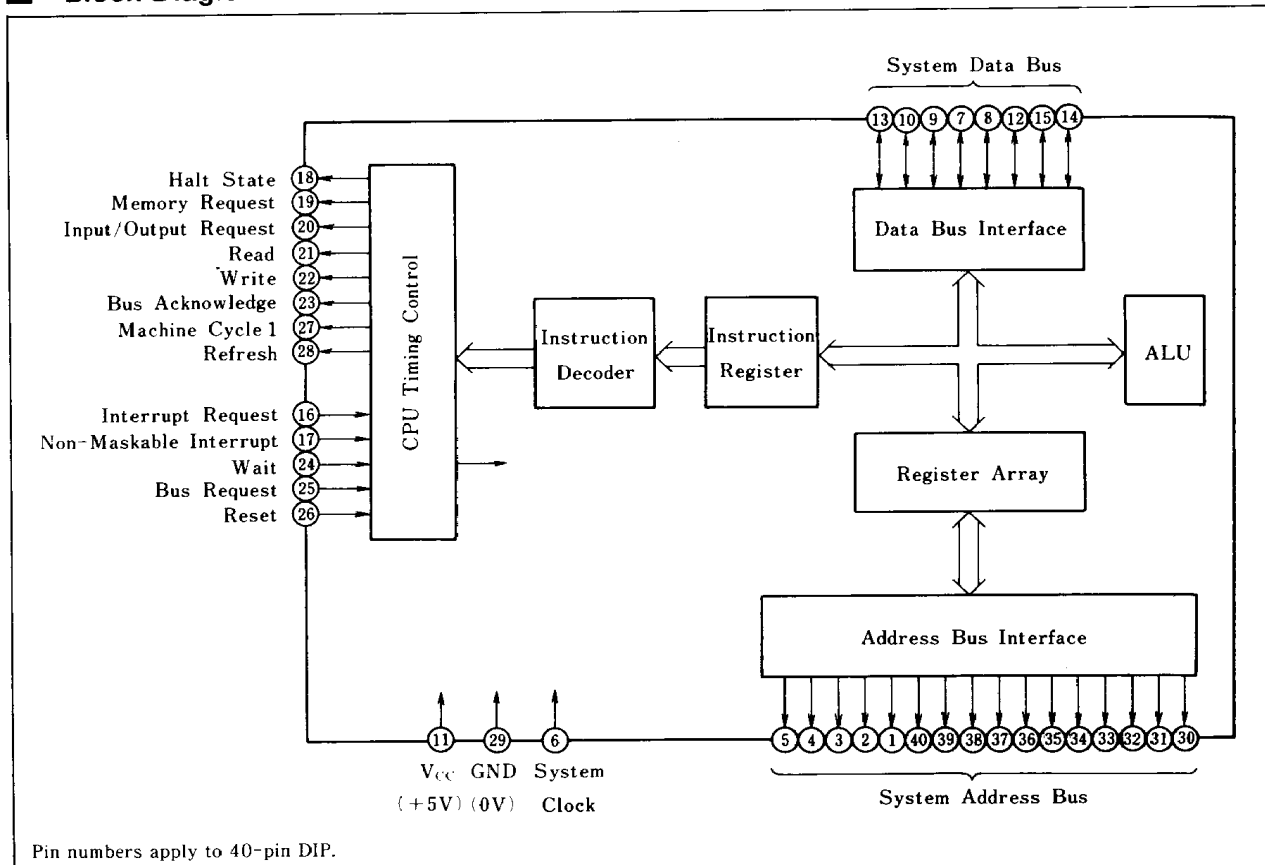

Pin numbers apply to 40-pin DIP.

## Pin Description

| Signal                          | Pin name                       | I/O                      | Function   |
|---------------------------------|--------------------------------|--------------------------|--|
| A <sub>0</sub> -A <sub>15</sub> | Address bus                    | 3-state O                | System address bus   |
| D <sub>0</sub> -D <sub>7</sub>  | Data bus                       | Bidirectional<br>3-state | System data bus  |
| $\overline{M1}$                 | Machine cycle one              | O                        | Active "Low". Indicates that the current machine cycle is the OP code fetch cycle of an instruction execution.   |
| $\overline{MREQ}$               | Memory request                 | 3-state O                | Active "Low". Indicates that the address bus holds a valid address for a memory read or memory write operation.  |
| $\overline{IORQ}$               | I/O request                    | 3-state O                | Active "Low". Indicates that the lower 8 bits of the address bus holds a valid I/O address for an I/O read or write operation. Also generated concurrently with $\overline{M1}$ during an interrupt acknowledge cycle to indicate an interrupt response. |
| $\overline{RD}$                 | Memory read                    | 3-state O                | Active "Low". Indicates that the CPU wants to read data from memory or an I/O device.  |
| $\overline{WR}$                 | Memory write                   | 3-state O                | Active "Low". Indicates that the CPU data bus holds valid data to be stored at the addressed memory or I/O location.   |
| $\overline{RFSH}$               | Refresh                        | O                        | Active "Low". Indicates that the lower 7 bits of the system address bus can be used as a refresh address to the system's dynamic memories. Together with $\overline{MREQ}$ at "Low".   |
| $\overline{HALT}$               | Halt state                     | O                        | Active "Low". Indicates that a Halt instruction is being executed. While halted, the CPU executes NOPs to maintain memory refresh. The Halt state is cleared with $\overline{RESET}$ , $\overline{NMI}$ , or $\overline{INT}$ (when allowed).            |
| $\overline{WAIT}$               | Wait                           | I                        | Active "Low". Indicates to the CPU that the addressed memory or I/O devices are not ready for a data transfer. The CPU continues to enter a wait state as long as this signal is active.   |
| $\overline{INT}$                | Maskable interrupt request     | I                        | Active "Low". Generated by I/O devices. The CPU honors a request at the end of the current instruction if the interrupt enable flip-flop is enabled.   |
| $\overline{NMI}$                | Non-maskable interrupt request | I                        | Active "Low". Has a higher priority than $\overline{INT}$ . Always recognized at the end of the current instruction, independent of the status of the interrupt enable flip-flop. Automatically forces the Z80 CPU to restart at location 0066H.         |
| $\overline{RESET}$              | Reset                          | I                        | Active "Low". Resets the interrupt enable flip-flop, the program counter interrupt vector register and the memory refresh register, and sets the interrupt status to Mode 0, in order to initialize the CPU.   |
| $\overline{BUSRQ}$              | Bus request                    | I                        | Active "Low". Has a higher priority than $\overline{NMI}$ . Always recognized at the end of the current machine cycle. Activated to allow a bus master other than the CPU to control the system bus.   |
| $\overline{BUSAK}$              | Bus acknowledge                | O                        | Active "Low". Indicates to the requesting device that the external circuitry can control the system bus.   |
| CLOCK                           | System clock                   | I                        | Inputs +5V single-phase clock.   |

SHARP

### Absolute Maximum Ratings

| Parameter             | Symbol    | Ratings      | Unit | Note |
|-----------------------|-----------|--------------|------|------|
| Input voltage         | $V_{IN}$  | -0.3 to +7.0 | V    |      |
| Output voltage        | $V_{OUT}$ | -0.3 to +7.0 | V    |      |
| Operating temperature | $T_{opr}$ | 0 to +70     | °C   | 1    |
|                       |           | 0 to +60     |      | 2    |
|                       |           | -20 to +85   |      | 3    |
| Storage temperature   | $T_{stg}$ | -65 to +150  | °C   |      |

Note 1: 40-pin DIP and 44-pin QFJ

Note 2: 44-pin QFP

Note 3: 40-pin DIP with wide temperature spec.

### Standard Test Conditions

The characteristics below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND (0V). Positive current flows into the referenced pin.

All ac parameters assume a load capacitance of 100 pF. Add 10 ns delay for each 50 pF increase in load up to a maximum of 200 pF for the data bus and 100 pF for address and control lines.

### DC Characteristics

( $V_{CC}=5V \pm 5\%$ ,  $T_a=0$  to  $+70^\circ\text{C}$  <sup>Note 1</sup>)

| Parameter                               | Symbol       | Conditions                      | MIN.         | TYP. | MAX.         | Unit          |    |
|---|--------------|---------------------------------|--------------|------|--------------|---------------|----|
| Clock input low voltage                 | $V_{ILC}$    |                                 | -0.3         |      | 0.45         | V             |    |
| Clock input high voltage                | $V_{IHC}$    |                                 | $V_{CC}-0.6$ |      | $V_{CC}+0.3$ | V             |    |
| Input low voltage                       | $V_{IL}$     |                                 | -0.3         |      | 0.8          | V             |    |
| Input high voltage                      | $V_{IH}$     |                                 | 2.0          |      | $V_{CC}$     | V             |    |
| Output low voltage                      | $V_{OL}$     | $I_{OL}=1.8\text{mA}$           |              |      | 0.4          | V             |    |
| Output high voltage                     | $V_{OH}$     | $I_{OH}=-250\ \mu\text{A}$      | 2.4          |      |              | V             |    |
| Current consumption                     | $I_{CC}$     |                                 |              |      | 150          | mA            |    |
|   |              |                                 |              |      | LH0080A      | 200           | mA |
|   |              |                                 |              |      | LH0080B      | 200           | mA |
|   |              |                                 |              |      | LH0080E      | 200           | mA |
| Input leakage current                   | $ I_{LI} $   | $0 \leq V_{IN} \leq V_{CC}$     |              |      | 10           | $\mu\text{A}$ |    |
| 3-state output leakage current in float | $ I_{LEAK} $ | $V_{OUT}=0.4\text{V to }V_{CC}$ |              |      | 10           | $\mu\text{A}$ |    |

Note 1:  $T_a=0$  to  $+60^\circ\text{C}$  for 44-pin QFP

$T_a=-20$  to  $+85^\circ\text{C}$  for 40-pin DIP with wide temperature spec.

### Capacitance

( $f=1\text{MHz}$ ,  $T_a=25^\circ\text{C}$ )

| Parameter          | Symbol      | Conditions                         | MIN. | TYP. | MAX. | Unit |
|--------------------|-------------|------------------------------------|------|------|------|------|
| Clock capacitance  | $C_{CLOCK}$ | Unmeasured pins returned to ground |      |      | 35   | pF   |
| Input capacitance  | $C_{IN}$    |                                    |      |      | 5    | pF   |
| Output capacitance | $C_{OUT}$   |                                    |      |      | 10   | pF   |

SHARP

## AC Characteristics

 $(V_{CC} = 5V \pm 5\%, T_a = 0 \text{ to } +70^\circ\text{C}^{\text{Note 1}})$ 

| No. | Parameter   | Symbol                | LH0080 |      | LH0080A |      | LH0080B |      | LH0080E* |      | Unit |
|-----|---|-----------------------|--------|------|---------|------|---------|------|----------|------|------|
|     |   |                       | MIN.   | MAX. | MIN.    | MAX. | MIN.    | MAX. | MIN.     | MAX. |      |
| 1   | Clock cycle time  | TcC                   | 400*   |      | 250*    |      | 165*    |      | 125*     |      | ns   |
| 2   | Clock pulse width (High)  | TwCh                  | 180*   |      | 110*    |      | 65*     |      | 55*      |      | ns   |
| 3   | Clock pulse width (Low)   | TwCl                  | 180    | 2000 | 110     | 2000 | 65      | 2000 | 55       | 2000 | ns   |
| 4   | Clock fall time   | TfC                   |        | 30   |         | 30   |         | 20   |          | 10   | ns   |
| 5   | Clock rise time   | TrC                   |        | 30   |         | 30   |         | 20   |          | 10   | ns   |
| 6   | Clock $\uparrow$ to address valid delay   | TdCr (A)              |        | 145  |         | 110  |         | 90   |          | 80   | ns   |
| 7   | Address valid to MREQ $\downarrow$ delay  | TdA (MREQf)           | 125*   |      | 65*     |      | 35*     |      | 20*      |      | ns   |
| 8   | Clock $\downarrow$ MREQ $\downarrow$ delay  | TdCf (MREQf)          |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 9   | Clock $\uparrow$ to MREQ $\uparrow$ delay   | TdCr (MREQr)          |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 10  | MREQ pulse width (High)   | TwMREQh               | 170*   |      | 110*    |      | 65*     |      | 45*      |      | ns   |
| 11  | MREQ pulse width (Low)  | TwMREQl               | 360*   |      | 220*    |      | 135*    |      | 100*     |      | ns   |
| 12  | Clock $\downarrow$ to MREQ $\uparrow$ delay   | TdCf (MREQr)          |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 13  | Clock $\downarrow$ to RD $\downarrow$ delay   | TdCf (RDf)            |        | 130  |         | 95   |         | 80   |          | 70   | ns   |
| 14  | Clock $\uparrow$ to RD $\uparrow$ delay   | TdCr (RD $\uparrow$ ) |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 15  | Data setup time to clock $\uparrow$   | TsD (Cr)              | 50     |      | 35      |      | 30      |      | 30       |      | ns   |
| 16  | Data hold time from RD $\uparrow$   | ThD (RD $\uparrow$ )  | 0      |      | 0       |      | 0       |      | 0        |      | ns   |
| 17  | WAIT setup time to clock $\downarrow$   | TsWAIT (Cf)           | 70     |      | 70      |      | 60      |      | 50       |      | ns   |
| 18  | WAIT hold time after clock $\downarrow$   | ThWAIT (Cf)           | 0      |      | 0       |      | 0       |      | 0        |      | ns   |
| 19  | Clock $\uparrow$ to M1 $\downarrow$ delay   | TdCr (M1f)            |        | 130  |         | 100  |         | 80   |          | 70   | ns   |
| 20  | Clock $\uparrow$ to M1 $\uparrow$ delay   | TdCr (M1r)            |        | 130  |         | 100  |         | 80   |          | 70   | ns   |
| 21  | Clock $\uparrow$ to RFSH $\downarrow$ delay   | TdCr (RFSHf)          |        | 180  |         | 130  |         | 110  |          | 95   | ns   |
| 22  | Clock $\uparrow$ to RFSH $\uparrow$ delay   | TdCr (RFSHr)          |        | 150  |         | 120  |         | 100  |          | 85   | ns   |
| 23  | Clock $\downarrow$ to RD $\uparrow$ delay   | TdCf (RD $\uparrow$ ) |        | 110  |         | 85   |         | 70   |          | 60   | ns   |
| 24  | Clock $\uparrow$ to RD $\downarrow$ delay   | TdCr (RDf)            |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 25  | Data Setup to clock $\uparrow$ during M <sub>2</sub> , M <sub>3</sub> , M <sub>4</sub> or M <sub>5</sub> cycles | TsD (Cf)              | 60     |      | 50      |      | 40      |      | 30       |      | ns   |
| 26  | Address stable prior to IORQ $\downarrow$   | TdA (IORQf)           | 320*   |      | 180*    |      | 110*    |      | 75*      |      | ns   |
| 27  | Clock $\uparrow$ IORQ $\downarrow$ delay  | TdCr (IORQf)          |        | 90   |         | 75   |         | 65   |          | 55   | ns   |
| 28  | Clock $\downarrow$ to IORQ $\downarrow$ delay   | TdCf (IORQr)          |        | 110  |         | 85   |         | 70   |          | 60   | ns   |
| 29  | Data stable prior to WR $\downarrow$  | TdDm (WRf)            | 190*   |      | 80*     |      | 25*     |      | 5*       |      | ns   |
| 30  | Clock $\downarrow$ WR $\downarrow$ delay  | TdCf (WRf)            |        | 90   |         | 80   |         | 70   |          | 60   | ns   |
| 31  | WR pulse width  | TwWR                  | 360*   |      | 220*    |      | 135*    |      | 100*     |      | ns   |
| 32  | Clock $\downarrow$ to WR $\uparrow$ delay   | TdCr (WRr)            |        | 100  |         | 80   |         | 70   |          | 60   | ns   |
| 33  | Data stable prior to WR $\downarrow$  | TdDi (WRf)            | 20*    |      | -10*    |      | -55*    |      | -55*     |      | ns   |
| 34  | Clock $\uparrow$ to WR $\downarrow$ delay   | TdCr (WRf)            |        | 80   |         | 65   |         | 60   |          | 55   | ns   |
| 35  | Data stable from WR $\uparrow$  | TdWRr (D)             | 120*   |      | 60*     |      | 30*     |      | 15*      |      | ns   |
| 36  | Clock $\downarrow$ to HALT $\uparrow$ or $\downarrow$   | TdCf (HALT)           |        | 300  |         | 300  |         | 260  |          | 225  | ns   |
| 37  | NMI pulse width   | TwNMI                 | 80     |      | 80      |      | 70      |      | 80       |      | ns   |
| 38  | BUSREQ setup time to clock $\uparrow$   | TsBUSRQ (Cr)          | 80     |      | 50      |      | 50      |      | 40       |      | ns   |
| 39  | BUSREQ hold time after clock $\uparrow$   | ThBUSRQ (Cr)          | 0      |      | 0       |      | 0       |      | 0        |      | ns   |
| 40  | Clock $\uparrow$ to BUSACK $\downarrow$ delay   | TdCr (BUSAKf)         |        | 120  |         | 100  |         | 90   |          | 80   | ns   |
| 41  | Clock $\downarrow$ to BUSACK $\uparrow$ delay   | TdCf (BUSAKr)         |        | 110  |         | 100  |         | 90   |          | 80   | ns   |
| 42  | Clock $\uparrow$ to data float delay  | TdCr (Dz)             |        | 90   |         | 90   |         | 80   |          | 70   | ns   |
| 43  | Clock $\uparrow$ to control output float delay (MREQ, IORQ, RD, and WR)   | TdCr (CTz)            |        | 110  |         | 80   |         | 70   |          | 60   | ns   |
| 44  | Clock $\uparrow$ to address float delay   | TdCr (Az)             |        | 110  |         | 90   |         | 80   |          | 70   | ns   |
| 45  | MREQ $\uparrow$ , IORQ $\uparrow$ , RD and WR $\uparrow$ to address hold time                                   | TdCTr (A)             | 160*   |      | 80*     |      | 35*     |      | 20*      |      | ns   |

$\uparrow$  Rising edge,  $\downarrow$  Falling edge

Note 1:  $T_a = 0 \text{ to } +60^\circ\text{C}$  for 44-pin QFP.


$T_a = -20 \text{ to } +85^\circ\text{C}$  for 40-pin DIP with wide temperature spec.

SHARP

| No. | Parameter                     | Symbol        | LH0080 |      | LH0080A |      | LH0080B |      | LH0080E* |      | Unit |
|-----|-------------------------------|---------------|--------|------|---------|------|---------|------|----------|------|------|
|     |                               |               | MIN.   | MAX. | MIN.    | MAX. | MIN.    | MAX. | MIN.     | MAX. |      |
| 46  | RESET ↓ to clock ↑ setup time | TsRESET (Cr)  | 90     |      | 60      |      | 60      |      | 45       |      | ns   |
| 47  | RESET from clock! ↑ hold time | ThRESET (Cr)  | 0      |      | 0       |      | 0       |      | 0        |      | ns   |
| 48  | INT to clock ↑ setup time     | TsINTf (Cr)   | 80     |      | 80      |      | 70      |      | 55       |      | ns   |
| 49  | INT from clock ↑ hold time    | ThINTr (Cr)   | 0      |      | 0       |      | 0       |      | 0        |      | ns   |
| 50  | M1 ↓ to IORQ ↓ delay          | TdM1f (IORQf) | 920*   |      | 565*    |      | 365*    |      | 270*     |      | ns   |
| 51  | Clockk ↓ to IORQ ↓ delay      | TdCf (IORQf)  |        | 110  |         | 85   |         | 70   |          | 60   | ns   |
| 52  | Clock ↑ to IORQ ↑ delay       | TdCf (IORQr)  |        | 100  |         | 85   |         | 70   |          | 60   | ns   |
| 53  | Clock ↓ to data valid delay   | TdCf (D)      |        | 230  |         | 150  |         | 130  |          | 115  | ns   |

All ac parameters assume a load capacitance of 100 pF. Add 10 μs delay for each 50 pF increase in load up to a maximum of 200 pF for the data bus and 100 pF for address and control lines.

\*For clock periods other than the minimums shown in the table, calculate parameters using the following expressions.



Footnotes to AC Characteristics

| No. | Symbol        | LH0080                  | LH0080A                 | LH0080B                 | LH0080E                 |
|-----|---------------|-------------------------|-------------------------|-------------------------|-------------------------|
| 1   | TcC           | TwCh + TwCl + TrC + TfC | TwCh + TwCl + TrC + TfC | TwCh + TwCl + TrC + TfC | TwCh + TwCl + TrC + TfC |
| 2   | TwCh          | MAX. 200 μs             | MAX. 200 μs             | MAX. 200 μs             | MAX. 200 μs             |
| 7   | TdA (MREQf)   | TwCh + TfC - 75         | TwCh + TfC - 65         | TwCh + TfC - 50         | TwCh + TfC - 45         |
| 10  | TwMREQh       | TwCh + TfC - 30         | TwCh + TfC - 20         | TwCh + TfC - 20         | TwCh + TfC - 20         |
| 11  | TwMREQl       | TcC - 40                | TcC - 30                | TcC - 30                | TcC - 25                |
| 26  | TdA (IORQf)   | TcC - 80                | TcC - 70                | TcC - 55                | TcC - 50                |
| 29  | TdD (WRf)     | TcC - 210               | TcC - 170               | TcC - 140               | TcC - 120               |
| 31  | TwWR          | TcC - 40                | TcC - 30                | TcC - 30                | TcC - 25                |
| 33  | TdD (WRf)     | TwCl + TrC - 180        | TwCl + TrC - 140        | TwCl + TrC - 140        | TwCl + TrC - 120        |
| 35  | TdWRr (D)     | TwCl + TrC - 80         | TwCl + TrC - 70         | TwCl + TrC - 55         | TwCl + TrC - 50         |
| 45  | TdCTr (A)     | TwCl + TrC - 40         | TwCl + TrC - 50         | TwCl + TrC - 50         | TwCl + TrC - 45         |
| 50  | TdM1f (IORQf) | 2Tch + TwCh + TfC - 80  | 2TcC + TwCh + TfC - 65  | 2TcC + TwCh + TfC - 50  | 2TcC + TwCh + TfC - 45  |

AC Test Conditions :

V<sub>IH</sub> = 2.0V    V<sub>IHC</sub> = V<sub>CC</sub> - 0.6V    V<sub>OH</sub> = 2.0V    FLOAT = ± 0.5  
 V<sub>IL</sub> = 0.8V    V<sub>ILC</sub> = 0.45V    V<sub>OL</sub> = 0.8V



**■ CPU Timing**

The Z80 CPU executes instructions by proceeding through a specific sequence of operations:


- Memory read or write
- I/O device read or write
- Interrupt acknowledge

The basic clock period is referred to as a T time or cycle, and three or more T cycles make up a machine cycle (M1, M2 or M3 for instance). Machine cycles can be extended either by the CPU automatically inserting one or more Wait states or by the insertion of one or more Wait states by the user.

**(1) Instruction Opcode Fetch**

The CPU places the contents of the Program Counter (PC) on the address bus at the start of the cycle (Fig. 1). Approximately one-half clock cycle later, MREQ goes active. When active, RD indicates that the memory data can be enabled onto the CPU data bus.

The CPU samples the WAIT input with the falling edge of clock state T<sub>2</sub>. During clock states T<sub>3</sub> and T<sub>4</sub> of an M1 cycle dynamic RAM refresh can occur while the CPU starts decoding and executing the instruction. When the Refresh Control signal becomes active, refreshing of dynamic memory can take place.

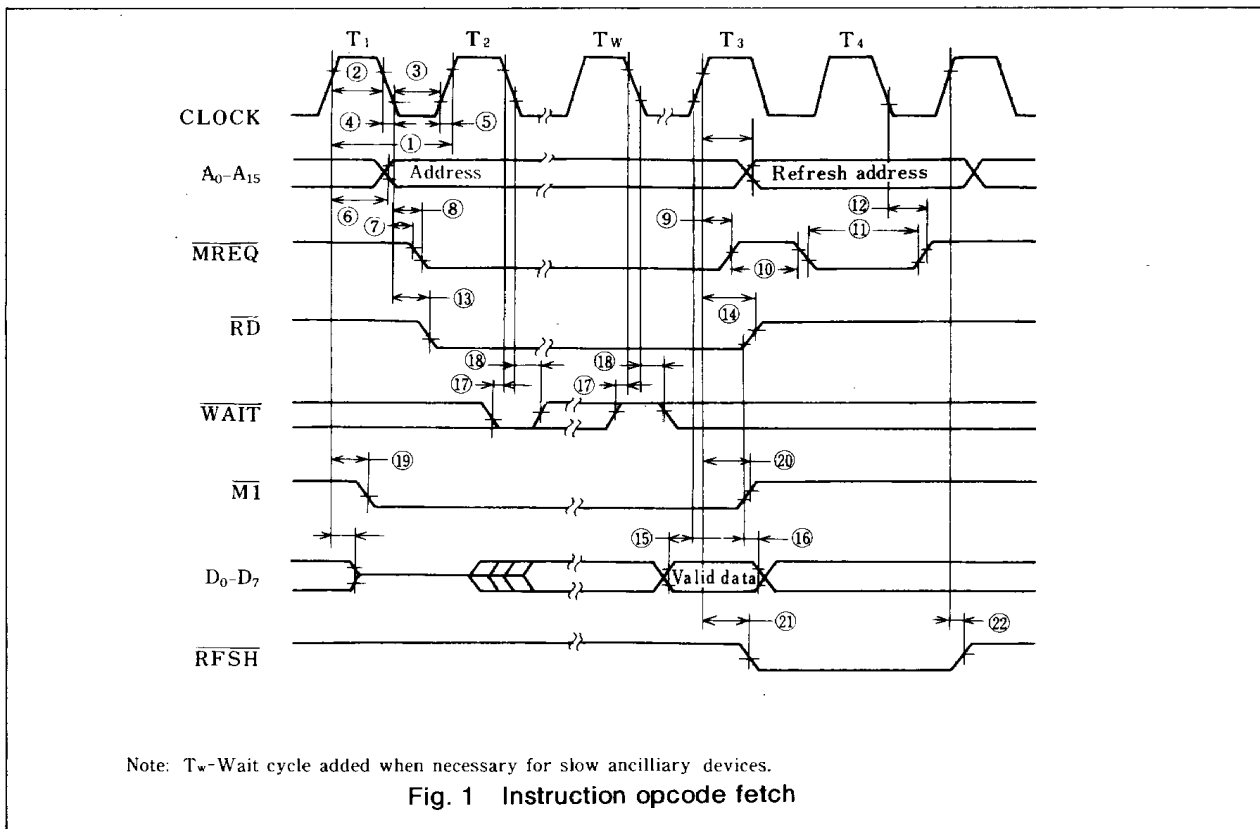


**(2) Memory Read or Write Cycles**

Fig. 2 shows the timing of memory read or write cycles other than an opcode fetch (M1) cycle. The MREQ and RD signals function exactly as in the fetch cycle. In a memory write cycle, MREQ also becomes active when the address bus is stable. The WR line is active when the data bus is stable, so that it can be used directly as an R/W pulse to most semiconductor memories.


**(3) Input or Output Cycles**

Fig. 3 shows the timing for an I/O read or I/O write operation. During I/O operations, the CPU automatically inserts a single wait state (T<sub>w</sub>). This extra wait state allows sufficient time for an I/O port to decode the address from the port address lines.



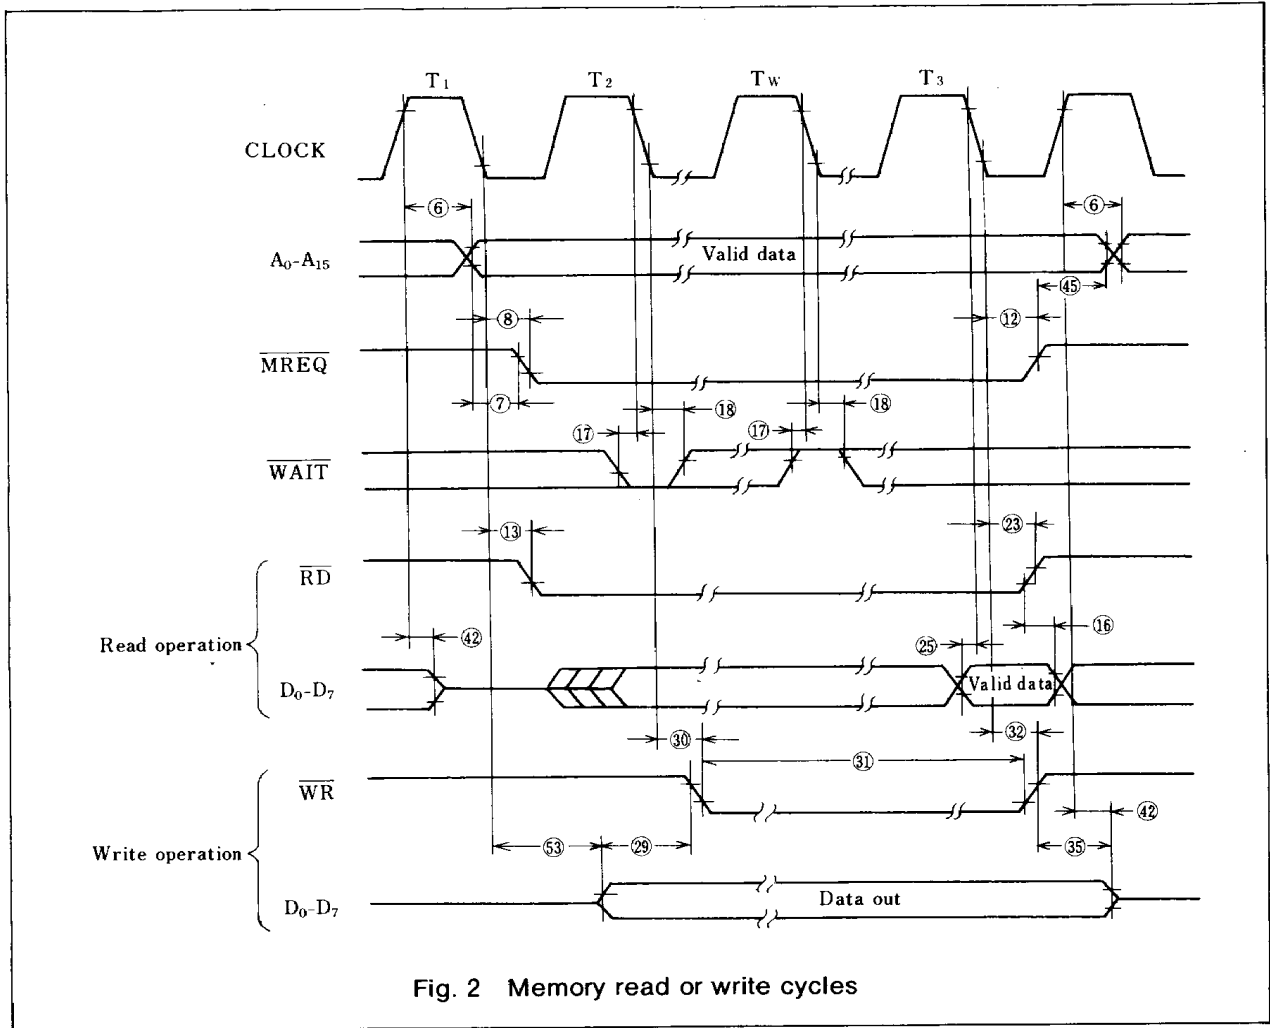




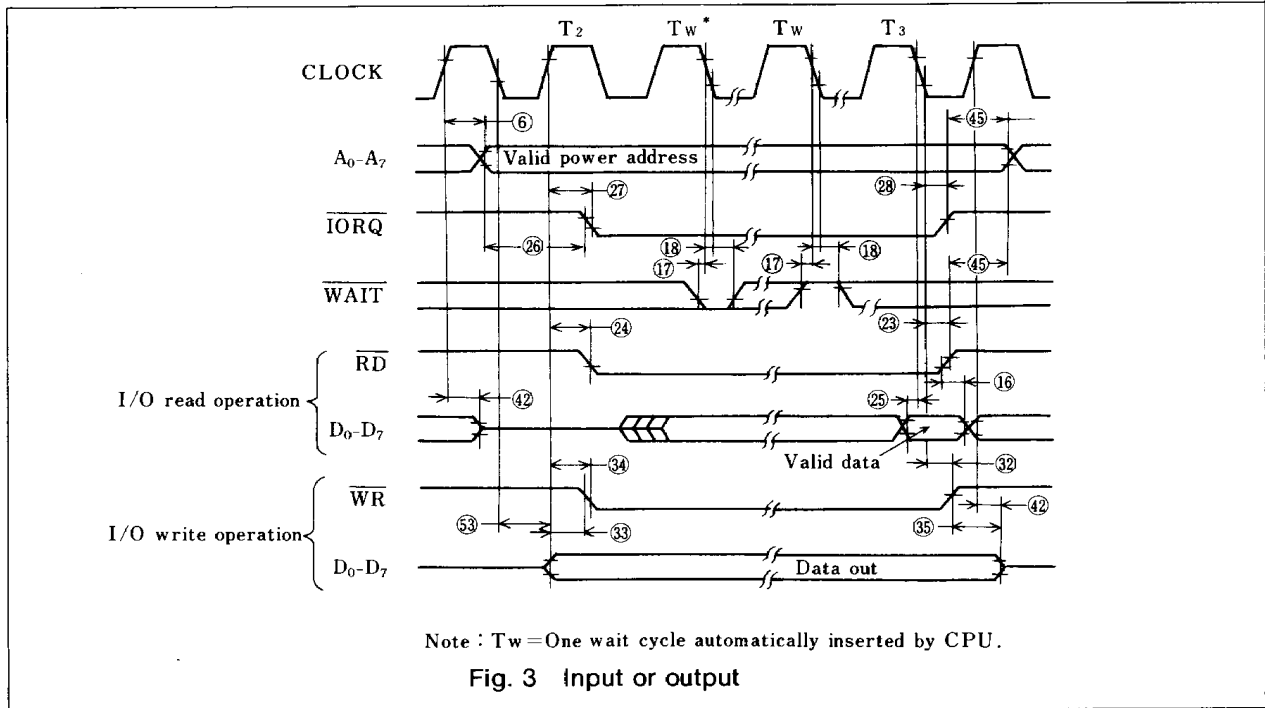

**(4) Interrupt request/acknowledge cycle**

The CPU samples the interrupt signal with the rising edge of the last clock at the end of any instruction (Fig. 4). When an interrupt is accepted, a special M1 cycle is generated. During this M1 cy-

cle, IORQ becomes active (instead of MREQ) to indicate that the interrupting device can place an 8-bit vector on the data bus. The CPU automatically adds two wait states to this cycle.

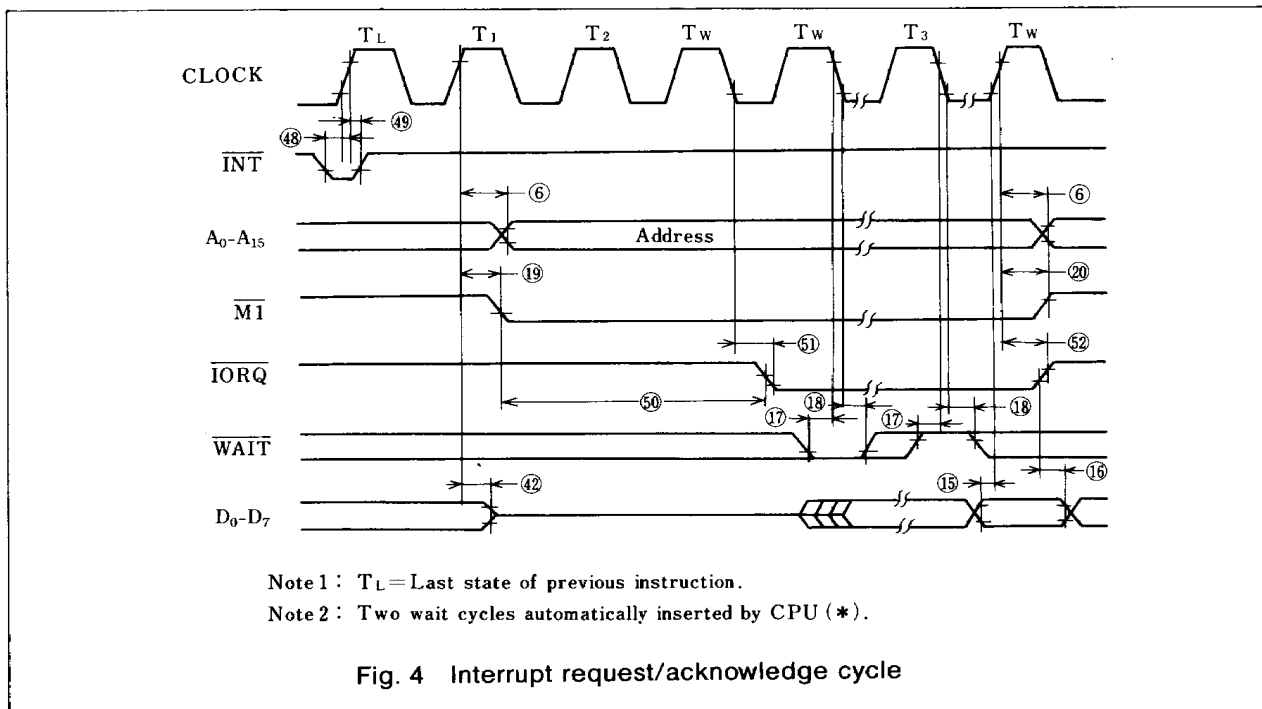

**(5) Non-maskable interrupt request cycle**

$\overline{NMI}$  is sampled at the same time as the maskable interrupt  $\overline{INT}$  but has higher priority and cannot be disabled under software control.

The subsequent timing is similar to that of a nor-

mal instruction fetch except that data put on the bus by the memory is ignored. The CPU instead executes a restart (RST) operation and jumps to the  $\overline{NMI}$  service routine located at address 0066H (Fig. 5).

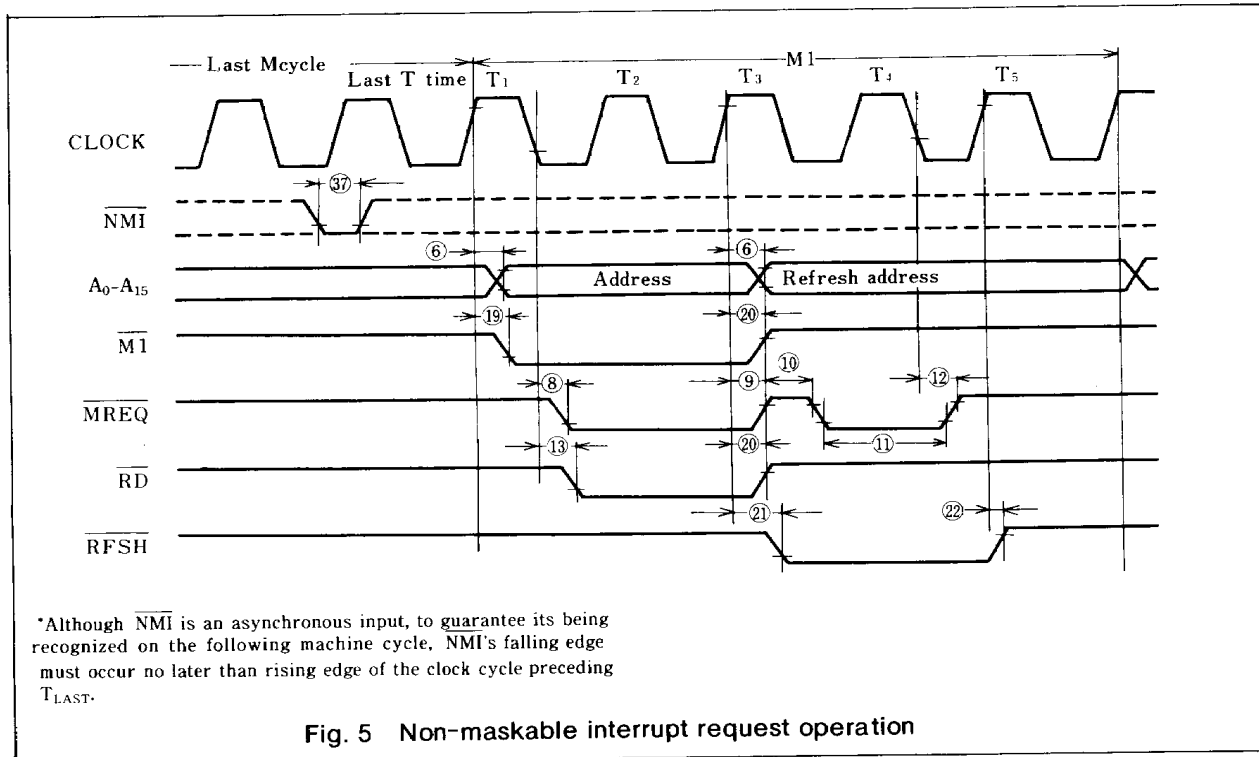


Fig. 5 Non-maskable interrupt request operation



**(6) Bus request/acknowledge cycle**



The CPU samples  $\overline{BUSREQ}$  with the rising edge of the last clock period of any machine cycle (Fig. 6). If  $\overline{BUSREQ}$  is active, the CPU sets its address, data, and  $\overline{MREQ}$ ,  $\overline{IORQ}$ ,  $\overline{RD}$ , and  $\overline{WR}$  lines to a high-impedance state with the rising edge of the next clock pulse. At that time, any external device can take control of these lines, usually to transfer data between memory and I/O devices.

**(7) Reset cycle**

$\overline{RESET}$  must be active for at least three clock cycles for the CPU to properly accept it. As long as  $\overline{RESET}$  remains active, the address and data buses float, and the control outputs are inactive. Once  $\overline{RESET}$  goes inactive, three internal T cycles are consumed before the CPU resumes normal processing operation.  $\overline{RESET}$  clears the PC register, so the first opcode fetch will be location 0000 (Fig. 8).



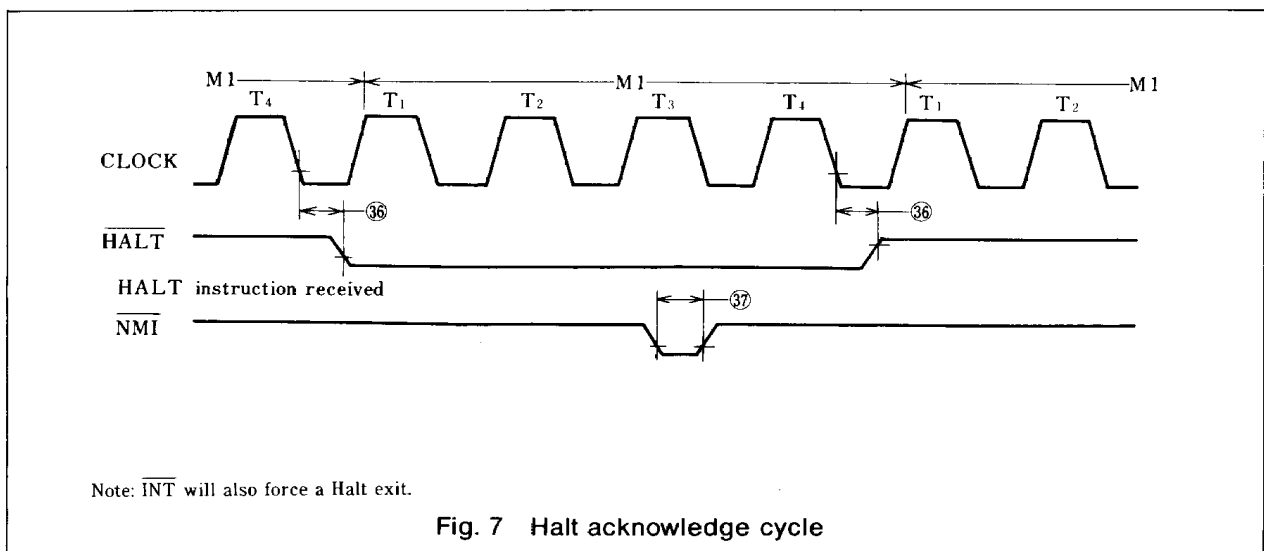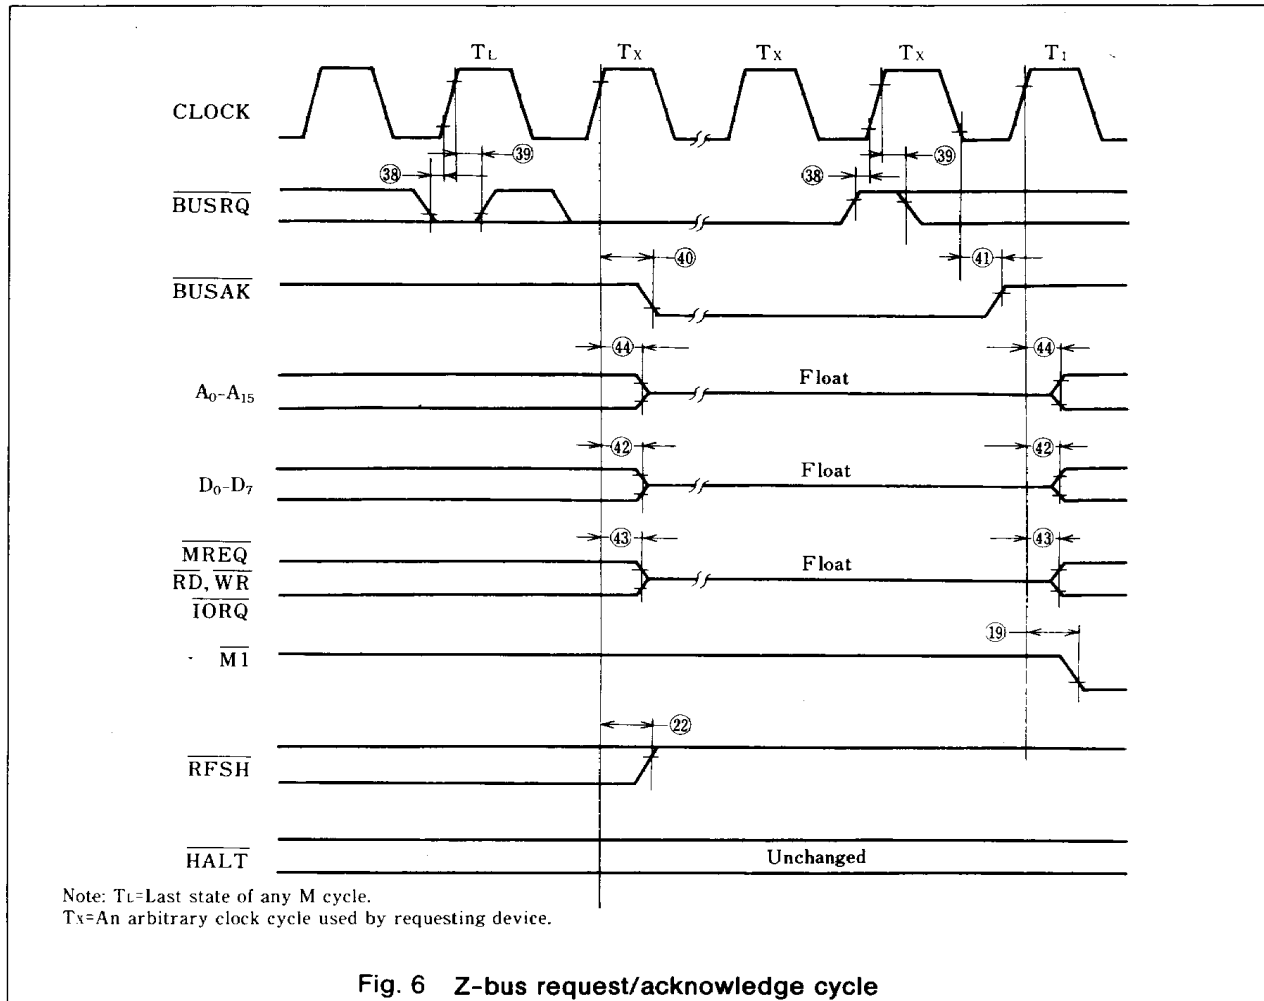

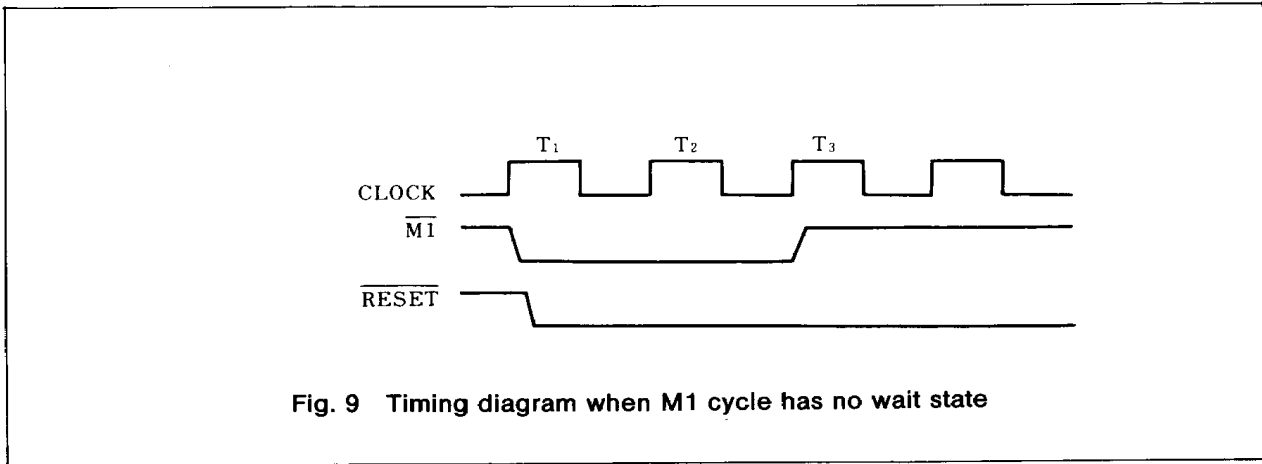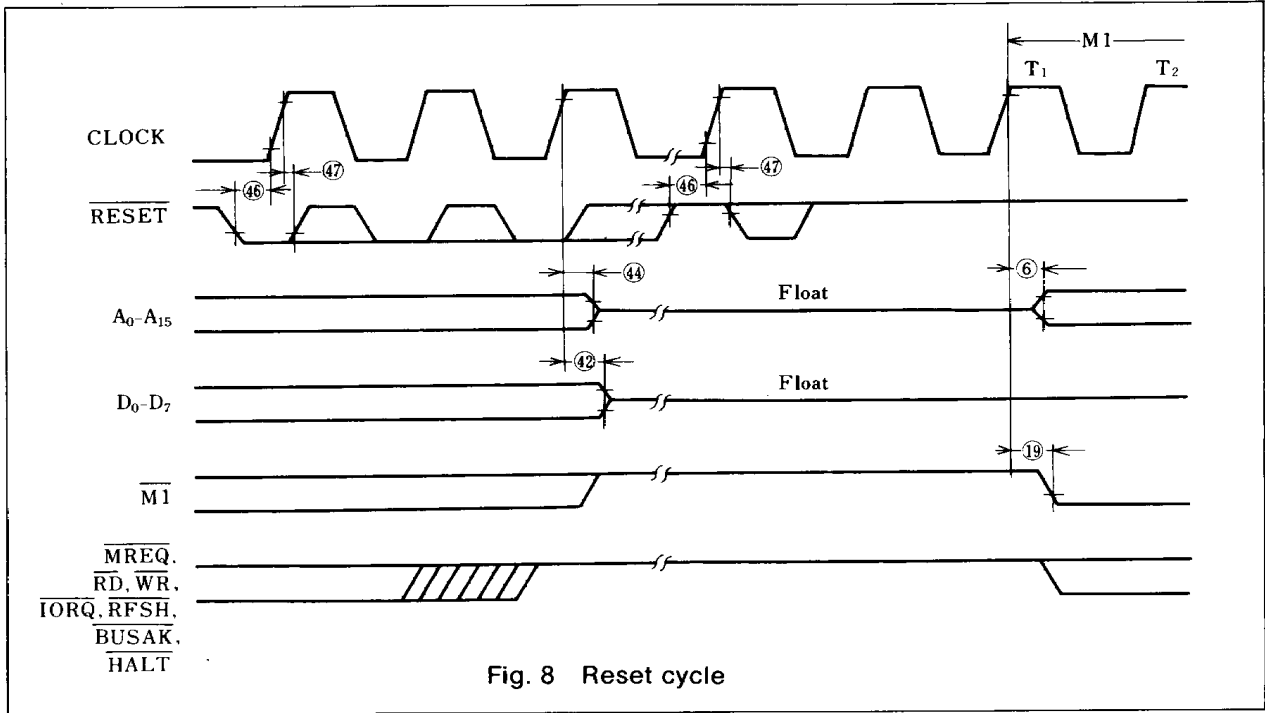

5

**<Reference>**

The RAM contents may be adversely affected by resetting the CPU while it is in operation.

To prevent this, a  $\overline{\text{RESET}}$  signal should be input in the following timings.

(1) No wait state in the M1 cycle


Input a  $\overline{\text{RESET}}$  signal to start sampling this signal at the clock rising in the M1 cycle's  $T_2$  state.

(See Fig. 9.)

(2) A wait state in the M1 cycle


Input a  $\overline{\text{RESET}}$  signal to start sampling this signal at the clock rising in the M1 cycle's  $T_3$  state.

(See Fig. 10.)

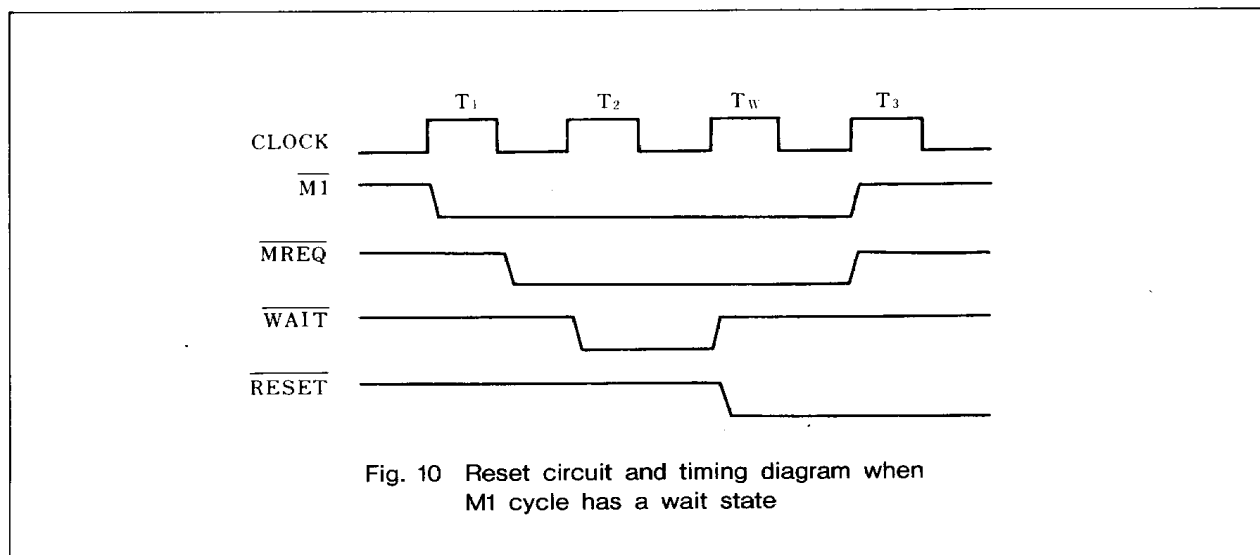

## ■ CPU Registers

|                   |                   |                    |                    |
|-------------------|-------------------|--------------------|--------------------|
| A Accumulator     | F Flag Register   | A' Accumulator     | F' Flag Register   |
| B General Purpose | C General Purpose | B' General Purpose | C' General Purpose |
| D General Purpose | E General Purpose | D' General Purpose | E' General Purpose |
| H General Purpose | L General Purpose | H' General Purpose | L' General Purpose |

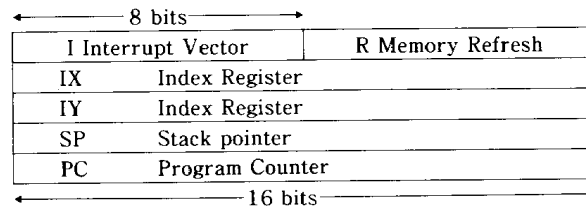

## ■ Architecture

### (1) CPU Registers

(i) **Program Counter (PC)** The program counter holds the 16 bits memory address of a current instruction. The CPU fetches the contents from memory address specified by the PC.

The PC feeds the data to the address line, automatically setting the PC value to +1. When a program jump takes place, a new value is directly set to the PC.

(ii) **Stack Pointer (SP)** The stack pointer holds the top 16-bit address of the stack with an external RAM. An external file is based on LIFO (Last-In, First-Out).

The data are transferred between a CPU-specified register and the stack by a PUSH or POP instruction. The last-pushed data are first popped from the stack.

(iii) **Index Register (IX & IY)** For index mode addressing, there are independent index registers IX and IY, each of which holds 16-bit reference address.

In the index mode, the index registers are used to designate the memory area for data input/output.

With an INDEX ADDRESSING instruction, an effective address comes by adding a one-byte displacement to the register content. This displacement is an integral signed two's complement number

(iv) **Interrupt Register (I)** The Z80 CPU has indirect subroutine call mode for any memory area according to an interrupt. For this purpose, this register stores the upper 8 bits of memory address for vectored interrupt processing and the lower 8 bits for the interrupting device.

(v) **Refresh Register (R)** The built-in refresh register provides user-transparent dynamic memory refresh. Its lower 7 bits are automatically incremented during each instruction fetch cycle.

While the CPU records a fetched instruction and executes the instruction, the refresh register data are placed on the address bus by a REFRESH control signal.

### (vi) Accumulator and Flag Register (A & F)

The CPU has also two independent 8-bit accumulators in combination with two 8-bit flag registers.

The accumulators store an operand or the results of an 8-bit operation. The flag registers, on the other hand, deal with the results of an 8-bit or 16-bit operation; for example, seeing if the result is equal to 0 or not.

(vii) **General-Purpose Registers** There are several pairs of general-purpose registers. In each pair, they can be used separately or as a 16-bit paired register. The paired registers are BC, DE, HL, as well as BC' DE' HL'. Either of these sets can work by an "Exchange" instruction at any time on a program.

### (2) Arithmetic/Logical Unit (ALU)

An 8-bit arithmetic/logical operation instruction is executed by the ALU inside the CPU. The ALU connects to each register through the internal bus for data transfer between them.

### (3) Instruction Register, CPU Control

Each instruction is read out of the memory, held in the instruction register, and decoded. The con-

5

control unit controls this action and gives control signals necessary to read and write data from and to the registers.

The control unit also makes ALU control signal and other external control signals.

**<Interrupts : General Operation>** The Z80 CPU accepts two interrupt input signals:  $\overline{\text{NMI}}$  and  $\overline{\text{INT}}$ . The  $\overline{\text{NMI}}$  is a non-maskable interrupt and has the highest priority.  $\overline{\text{INT}}$  is a lower priority interrupt and it requires that interrupts be enabled in software in order to operate.

#### (1) Non-Maskable Interrupt ( $\overline{\text{NMI}}$ )

The non-maskable interrupt will be accepted at all times by the CPU.

After recognition of the  $\overline{\text{NMI}}$  signal, the CPU jumps to restart location 0066H.

#### (2) Maskable Interrupt ( $\overline{\text{INT}}$ )

The maskable interrupt,  $\overline{\text{INT}}$ , has three programmable response modes available.


(i) **Mode 0 Interrupt Operation.** This mode is similar to the 8080A microprocessor interrupt service procedures. The interrupting de-

vice places an instruction on the data bus. This is a Restart instruction or a Call instruction.

(ii) **Mode 1 Interrupt Operation.** Mode 1 operation is very similar to that for the  $\overline{\text{NMI}}$ . The principal difference is that the Mode 1 interrupt has a restart location of 0038H only.

(iii) **Mode 2 Interrupt Operation.** This interrupt mode has been designed to utilize most effectively the capabilities of the Z80 microprocessor and its associated peripheral family. The interrupting peripheral device selects the starting address (16 bits) of the interrupt service routine. It does this by placing an 8-bit vector on the data bus during the interrupt acknowledge cycle. The CPU forms a pointer using this byte as the lower 8-bits and the contents of the I register as the upper 8-bits. This points to an entry in a table of addresses for interrupt service routines. The CPU then jumps to the routine at that address.

All the Z80 peripheral devices have the interrupt priority circuit with a daisy-chain configuration. During an interrupt acknowledge cycle, vectors are automatically fed. For more details, refer to the Z80 PIO description.

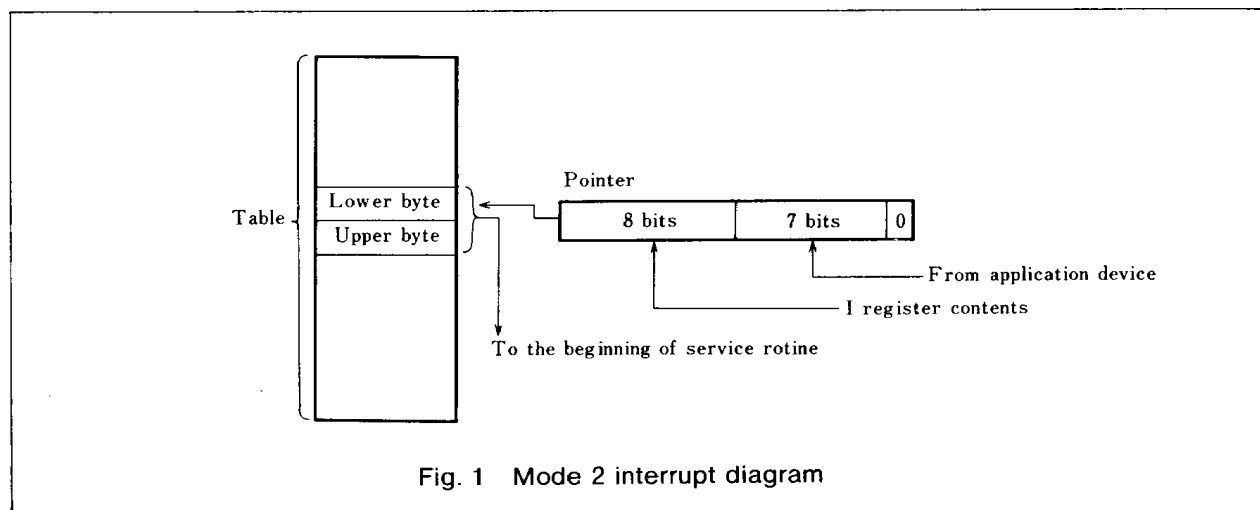

Instruction Set

Table 1 8-bit load group

| Mnemonic     | Symbolic operation | OP code |     |              | HEX code (Basic) | Flags |   |     |   |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments   |  |  |  |
|--------------|--------------------|---------|-----|--------------|------------------|-------|---|-----|---|---|---|--------------|-----------------|-----------------|------------|--|--|--|
|              |                    | 76      | 543 | 210          |                  | C     | Z | P/V | S | N | H |              |                 |                 |            |  |  |  |
| LD r, r'     | r ← r'             | 01      | r   | r'           | 40+              | ●     | ● | ●   | ● | ● | ● | 1            | 1               | 4               |            |  |  |  |
| LD r, n      | r ← n              | 00      | r   | 110<br>← n → | 06+              | ●     | ● | ●   | ● | ● | ● | 2            | 2               | 7               | r,r   Reg. |  |  |  |
| LD r, (HL)   | r ← (HL)           | 01      | r   | 110          | 46+              | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               | 000   B    |  |  |  |
| LD r, (IX+d) | r ← (IX+d)         | 11      | 011 | 101          | DD               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 19              | 001   C    |  |  |  |
|              |                    | 01      | r   | 110<br>← d → | 46+              |       |   |     |   |   |   |              |                 |                 | 010   D    |  |  |  |
| LD r, (IY+d) | r ← (IY+d)         | 11      | 111 | 101          | FD               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 19              | 011   E    |  |  |  |
|              |                    | 01      | r   | 110<br>← d → | 46               |       |   |     |   |   |   |              |                 |                 | 100   H    |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 |                 | 101   L    |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 | 111   A         |            |  |  |  |
| LD (HL), r   | (HL) ← r           | 01      | 110 | r            | 70+              | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               |            |  |  |  |
| LD (IX+d), r | (IX+d) ← r         | 11      | 011 | 101          | DD               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 19              |            |  |  |  |
|              |                    | 01      | 110 | r<br>← d →   | 70+              |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD (IY+d), r | (IY+d) ← r         | 11      | 111 | 101          | FD               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 19              |            |  |  |  |
|              |                    | 01      | 110 | r<br>← d →   | 70+              |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD (HL), n   | (HL) ← n           | 00      | 110 | 110<br>← n → | 36               | ●     | ● | ●   | ● | ● | ● | 2            | 3               | 10              |            |  |  |  |
| LD (IX+d), n | (IX+d) ← n         | 11      | 011 | 101          | DD               | ●     | ● | ●   | ● | ● | ● | 4            | 5               | 19              |            |  |  |  |
|              |                    | 00      | 110 | 110<br>← d → | 36               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD (IY+d), n | (IY+d) ← n         | 11      | 111 | 101          | FD               | ●     | ● | ●   | ● | ● | ● | 4            | 5               | 19              |            |  |  |  |
|              |                    | 00      | 110 | 110<br>← d → | 36               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD A, (BC)   | A ← (BC)           | 00      | 001 | 010          | 0A               | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               |            |  |  |  |
| LD A, (DE)   | A ← (DE)           | 00      | 011 | 010          | 1A               | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               |            |  |  |  |
| LD A, (nn)   | A ← (nn)           | 00      | 111 | 010          | 3A               | ●     | ● | ●   | ● | ● | ● | 3            | 4               | 13              |            |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD (BC), A   | (BC) ← A           | 00      | 000 | 010          | 02               | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               |            |  |  |  |
| LD (DE), A   | (DE) ← A           | 00      | 010 | 010          | 12               | ●     | ● | ●   | ● | ● | ● | 1            | 2               | 7               |            |  |  |  |
| LD (nn), A   | (nn) ← A           | 00      | 110 | 010          | 32               | ●     | ● | ●   | ● | ● | ● | 3            | 4               | 13              |            |  |  |  |
|              |                    |         |     |              |                  |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD A, I      | A ← I              | 11      | 101 | 101          | ED               | ●     | ↑ | IFF | ↓ | 0 | 0 | 2            | 2               | 9               |            |  |  |  |
|              |                    | 01      | 010 | 111          | 57               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD A, R      | A ← R              | 11      | 101 | 101          | ED               | ●     | ↑ | IFF | ↓ | 0 | 0 | 2            | 2               | 9               |            |  |  |  |
|              |                    | 01      | 011 | 111          | 5F               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD I, A      | I ← A              | 11      | 101 | 101          | ED               | ●     | ● | ●   | ● | ● | ● | 2            | 2               | 9               |            |  |  |  |
|              |                    | 01      | 000 | 111          | 47               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |
| LD R, A      | R ← A              | 11      | 101 | 101          | ED               | ●     | ● | ●   | ● | ● | ● | 2            | 2               | 9               |            |  |  |  |
|              |                    | 01      | 001 | 111          | 4F               |       |   |     |   |   |   |              |                 |                 |            |  |  |  |

Notes : r, r' means any of the registers A, B, C, D, E, H, L, IFF the content of the interrupt enable flip-flop, (IFF) is copied into the P/V flag.  
 Flags : C (carry), Z (zero), S (sign), P/V (parity/overflow), H (half carry), N (add/subtract).  
 : ● = unchanged, 0 = reset, 1 = set, X = undefined.  
 : † set or reset according to the result of the operation.





Table 2 16-bit load group

| Mnemonic    | Symbolic operation                                   | OP code |     |     | HEX code (Basic) | Flags |   |     |   |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments   |      |
|-------------|--|---------|-----|-----|------------------|-------|---|-----|---|---|---|--------------|-----------------|-----------------|--|------|
|             |  | 76      | 543 | 210 |                  | C     | Z | P/V | S | N | H |              |                 |                 |  |      |
| LD dd, nn   | dd ← nn  | 00      | dd0 | 001 | 01+              | ●     | ● | ●   | ● | ● | ● | 3            | 3               | 10              | dd   | Reg. |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD IX, nn   | IX ← nn  | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 4            | 4               | 14              | 00   | BC   |
|             |  | 00      | 100 | 001 | 21               |       |   |     |   |   |   |              |                 |                 | 01   | DE   |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 | 10   | HL   |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 | 11   | SP   |
| LD IY, nn   | IY ← nn  | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 4            | 4               | 14              |  |      |
|             |  | 00      | 100 | 001 | 21               |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD HL, (nn) | H ← (nn+1)<br>L ← (nn)                               | 00      | 101 | 010 | 2A               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 16              | nn : 2-byte number.<br>Lower byte just after opcode. |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD dd, (nn) | dd <sub>H</sub> ← (nn+1)<br>dd <sub>L</sub> ← (nn)   | 11      | 101 | 101 | ED               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              | Upper byte comes next.                               |      |
|             |  | 01      | dd1 | 011 | 4B+              |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD IX, (nn) | IX <sub>H</sub> ← (nn+1)<br>IX <sub>L</sub> ← (nn)   | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              |  |      |
|             |  | 00      | 101 | 010 | 2A               |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD IY, (nn) | IY <sub>H</sub> ← (nn+1)<br>IY <sub>L</sub> ← (nn)   | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              |  |      |
|             |  | 00      | 101 | 010 | 2A               |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD (nn), HL | (nn+1) ← H<br>(nn) ← L                               | 00      | 100 | 010 | 22               | ●     | ● | ●   | ● | ● | ● | 3            | 5               | 16              |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD (nn), dd | (nn+1) ← dd <sub>H</sub><br>(nn) ← dd <sub>L</sub>   | 11      | 101 | 101 | ED               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              |  |      |
|             |  | 01      | dd0 | 011 | 43+              |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD (nn), IX | (nn+1) ← IX <sub>H</sub><br>(nn) ← IX <sub>L</sub>   | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              |  |      |
|             |  | 00      | 100 | 010 | 22               |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD (nn), IY | (nn+1) ← IY <sub>H</sub><br>(nn) ← IY <sub>L</sub>   | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 4            | 6               | 20              |  |      |
|             |  | 00      | 100 | 010 | 22               |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
|             |  | ←       | n   | →   |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| LD SP, HL   | SP ← HL  | 11      | 111 | 001 | F9               | ●     | ● | ●   | ● | ● | ● | 1            | 1               | 6               |  |      |
| LD SP, IX   | SP ← IX  | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 2            | 2               | 10              |  |      |
|             |  | 11      | 111 | 001 | F9               |       |   |     |   |   |   |              |                 |                 |  |      |
| LD SP, IY   | SP ← IY  | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 2            | 2               | 10              |  |      |
|             |  | 11      | 111 | 001 | F9               |       |   |     |   |   |   |              |                 |                 |  |      |
| PUSH qq     | (SP-2) ← qq <sub>L</sub><br>(SP-1) ← qq <sub>H</sub> | 11      | qq0 | 101 | C5+              | ●     | ● | ●   | ● | ● | ● | 1            | 3               | 11              | qq   | Reg. |
|             |  |         |     |     |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| PUSH IX     | (SP-2) ← IX <sub>L</sub><br>(SP-1) ← IX <sub>H</sub> | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 2            | 4               | 15              | 00   | BC   |
|             |  | 11      | 100 | 101 | E5               |       |   |     |   |   |   |              |                 |                 | 01   | DE   |
|             |  |         |     |     |                  |       |   |     |   |   |   |              |                 |                 | 10   | HL   |
| PUSH IY     | (SP-2) ← IY <sub>L</sub><br>(SP-1) ← IY <sub>H</sub> | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 2            | 4               | 15              |  |      |
|             |  | 11      | 100 | 101 | E5               |       |   |     |   |   |   |              |                 |                 | 11   | AF   |
| POP qq      | qq <sub>H</sub> ← (SP+1)<br>qq <sub>L</sub> ← (SP)   | 11      | qq0 | 001 | C1+              | ●     | ● | ●   | ● | ● | ● | 1            | 3               | 10              |  |      |
|             |  |         |     |     |                  |       |   |     |   |   |   |              |                 |                 |  |      |
| POP IX      | IX <sub>H</sub> ← (SP+1)<br>IX <sub>L</sub> ← (SP)   | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ● | 2            | 4               | 14              |  |      |
|             |  | 11      | 100 | 001 | E1               |       |   |     |   |   |   |              |                 |                 |  |      |
| POP IY      | IY <sub>H</sub> ← (SP+1)<br>IY <sub>L</sub> ← (SP)   | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ● | 2            | 4               | 14              |  |      |
|             |  | 11      | 100 | 001 | E1               |       |   |     |   |   |   |              |                 |                 |  |      |

Notes : dd is any of the register pairs BC, DE, HL, SP.

qq is any of the register pairs AF, BC, DE, HL.

{PAIR}<sub>H</sub>, {PAIR}<sub>L</sub> refer to high order and low order eight bits of the register pair respectively, e.g., BC<sub>L</sub>=C, AF<sub>H</sub>=A.

Flags : ● = unchanged, 0 = reset, 1 = set, X = undefined, † = set or reset according to the result of the operation

SHARP

Table 3 Exchange, block transfer, block search groups

| Mnemonic    | Symbolic operation  | OP code |     |     | HEX code (Basic) | Flags |   |     |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments            |   |
|-------------|---|---------|-----|-----|------------------|-------|---|-----|---|---|--------------|-----------------|-----------------|---------------------|---|
|             |   | 76      | 543 | 210 |                  | C     | Z | P/V | S | N |              |                 |                 |                     | H   |
| EX DE, HL   | DE ↔ HL   | 11      | 101 | 011 | EB               | ●     | ● | ●   | ● | ● | ●            | 1               | 1               | 4                   |   |
| EX AF, AF'  | AF ↔ AF'  | 00      | 001 | 000 | 08               | ●     | ● | ●   | ● | ● | ●            | 1               | 1               | 4                   |   |
| EXX         | $\begin{matrix} BC & \leftrightarrow & BC' \\ \left( \begin{matrix} DE \\ HL \end{matrix} \right) & \leftrightarrow & \left( \begin{matrix} DE' \\ HL' \end{matrix} \right) \end{matrix}$ | 11      | 011 | 001 | D9               | ●     | ● | ●   | ● | ● | ●            | 1               | 1               | 4                   | Register bank and auxiliary register bank exchange                              |
| EX (SP), HL | H ↔ (SP+1)<br>L ↔ (SP)  | 11      | 100 | 011 | E3               | ●     | ● | ●   | ● | ● | ●            | 1               | 5               | 19                  |   |
| EX (SP), IX | IX <sub>H</sub> ↔ (SP+1)  | 11      | 011 | 101 | DD               | ●     | ● | ●   | ● | ● | ●            | 2               | 6               | 23                  |   |
|             | IX <sub>L</sub> ↔ (SP)  | 11      | 100 | 011 | E3               |       |   |     |   |   |              |                 |                 |                     |   |
| EX (SP), IY | IY <sub>H</sub> ↔ (SP+1)  | 11      | 111 | 101 | FD               | ●     | ● | ●   | ● | ● | ●            | 2               | 6               | 23                  |   |
|             | IY <sub>L</sub> ↔ (SP)  | 11      | 100 | 011 | E3               |       |   |     |   |   |              |                 |                 |                     |   |
| LDI         | (DE) ← (HL)   | 11      | 101 | 101 | ED               | ●     | ● | ↑   | ● | 0 | 0            | 2               | 4               | 16                  | Load (HL) into (DE), increment the pointers and decrement the byte counter (BC) |
|             | DE ← DE+1   | 10      | 100 | 000 | A0               |       |   | ①   |   |   |              |                 |                 |                     |   |
|             | HL ← HL+1<br>BC ← BC-1  |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
| LDIR        | (DE) ← (HL)   | 11      | 101 | 101 | ED               | ●     | ● | 0   | ● | 0 | 0            | 2               | 5               | 21                  | If BC ≠ 0   |
|             | DE ← DE+1   | 10      | 110 | 000 | B0               |       |   |     |   |   |              |                 |                 |                     |   |
|             | HL ← HL+1<br>BC ← BC-1  |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
|             | If BC=0 end   |         |     |     |                  |       |   |     |   |   | 2            | 4               | 16              | If BC=0             |   |
| LDD         | (DE) ← (HL)   | 11      | 101 | 101 | ED               | ●     | ● | ↑   | ● | 0 | 0            | 2               | 4               | 16                  |   |
|             | DE ← DE-1   | 10      | 101 | 000 | A8               |       |   | ①   |   |   |              |                 |                 |                     |   |
|             | HL ← HL-1<br>BC ← BC-1  |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
| LDDR        | (DE) ← (HL)   | 11      | 101 | 101 | ED               | ●     | ● | 0   | ● | 0 | 0            | 2               | 5               | 21                  | If BC ≠ 0   |
|             | DE ← DE-1   | 10      | 111 | 000 | B8               |       |   |     |   |   |              |                 |                 |                     |   |
|             | HL ← HL-1<br>BC ← BC-1  |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
|             | If BC=0 end   |         |     |     |                  |       |   |     |   |   | 2            | 4               | 16              | If BC=0             |   |
| CPI         | A - (HL)  | 11      | 101 | 101 | ED               | ●     | ↑ | ↑   | ↑ | 1 | ↑            | 2               | 4               | 16                  |   |
|             | HL ← HL+1   | 10      | 100 | 001 | A1               |       | ② | ①   |   |   |              |                 |                 |                     |   |
|             | BC ← BC-1   |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
| CPIR        | A - (HL)  | 11      | 101 | 101 | ED               | ●     | ↑ | ↑   | ↑ | 1 | ↑            | 2               | 5               | 21                  | If BC ≠ 0 and A ≠ (HL)  |
|             | HL ← HL+1   | 10      | 110 | 001 | B1               |       | ② | ①   |   |   |              |                 |                 |                     |   |
|             | BC ← BC-1   |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
|             | If A = (HL) or BC=0 end   |         |     |     |                  |       |   |     |   |   | 2            | 4               | 16              | If BC=0 or A = (HL) |   |
| CPD         | A - (HL)  | 11      | 101 | 101 | ED               | ●     | ↑ | ↑   | ↑ | 1 | ↑            | 2               | 4               | 16                  |   |
|             | HL ← HL-1   | 10      | 101 | 001 | A9               |       | ② | ①   |   |   |              |                 |                 |                     |   |
|             | BC ← BC-1   |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
| CPDR        | A - (HL)  | 11      | 101 | 101 | ED               | ●     | ↑ | ↑   | ↑ | 1 | ↑            | 2               | 5               | 21                  | If BC ≠ 0 and A ≠ (HL)  |
|             | HL ← HL-1   | 10      | 111 | 001 | B9               |       | ② | ①   |   |   |              |                 |                 |                     |   |
|             | BC ← BC-1   |         |     |     |                  |       |   |     |   |   |              |                 |                 |                     |   |
|             | If A = (HL) or BC=0 end   |         |     |     |                  |       |   |     |   |   | 2            | 4               | 16              | If BC=0 or A = (HL) |   |

Note: ①P/V flag is 0 if the result of BC=0, otherwise P/V=1

②Z flag is 1 if A = (HL), otherwise Z=0

Flags: ● = unchanged

0 = set, 1 = reset

↑ = set or reset according to the result of the operation

Table 4 8-bit arithmetic and logical group

| Mnemonic      | Symbolic operation           | OP code   |     |                          | HEX code (Basic) | Flags |   |     |   |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments                     |      |     |     |
|---------------|------------------------------|---|-----|--------------------------|------------------|-------|---|-----|---|---|---|--------------|-----------------|-----------------|------------------------------|------|-----|-----|
|               |                              | 76  | 543 | 210                      |                  | C     | Z | P/V | S | N | H |              |                 |                 | r                            | Reg. |     |     |
| ADD A, r      | $A \leftarrow A+r$           | 10  | k   | r                        | 80+              | ↑     | ↑ | V   | ↑ | 0 | ↑ | 1            | 1               | 4               | r                            | Reg. |     |     |
| ADD A, n      | $A \leftarrow A+n$           | 11  | k   | 110<br>← n →             | C6+              | ↑     | ↑ | V   | ↑ | 0 | ↑ | 2            | 2               | 7               | 000                          | B    |     |     |
| ADD A, (HL)   | $A \leftarrow A+(HL)$        | 10  | k   | 110                      | 86+              | ↑     | ↑ | V   | ↑ | 0 | ↑ | 1            | 2               | 7               | 001                          | C    |     |     |
| ADD A, (IX+d) | $A \leftarrow A+(IX+d)$      | 11  | 011 | 101<br>10 k 110<br>← d → | DD<br>86+        | ↑     | ↑ | V   | ↑ | 0 | ↑ | 3            | 5               | 19              | 010                          | D    |     |     |
| ADD A, (IY+d) | $A \leftarrow A+(IY+d)$      | 11  | 111 | 101<br>10 k 110<br>← d → | FD<br>86+        | ↑     | ↑ | V   | ↑ | 0 | ↑ | 3            | 5               | 19              | 011                          | E    |     |     |
| ADC A, s      | $A \leftarrow A+s+C$         | 4 types available based on the above ADD instruction (see Comments) |     |                          |                  | ↑     | ↑ | V   | ↑ | 0 | ↑ | 1*1          | 1*1             | 4*1             | Mnemonic                     | k    |     |     |
| SUB s         | $A \leftarrow A-s$           |   |     |                          |                  | ↑     | ↑ | V   | ↑ | 1 | ↑ |              |                 |                 |                              |      | ADC | 001 |
| SBC A, s      | $A \leftarrow A-s-C$         |   |     |                          |                  | ↑     | ↑ | V   | ↑ | 1 | ↑ |              |                 |                 |                              |      | SUB | 010 |
| AND s         | $A \leftarrow A \wedge s$    |   |     |                          |                  | 0     | ↑ | P   | ↑ | 0 | 1 |              |                 |                 |                              |      | SBC | 011 |
| OR s          | $A \leftarrow A \vee s$      |   |     |                          |                  | 0     | ↑ | P   | ↑ | 0 | 0 |              |                 |                 |                              |      | AND | 100 |
| XOR s         | $A \leftarrow A \oplus s$    |   |     |                          |                  | 0     | ↑ | P   | ↑ | 0 | 0 |              |                 |                 |                              |      | OR  | 110 |
| CP s          | $A-s$                        |   |     |                          |                  | ↑     | ↑ | V   | ↑ | 1 | ↑ |              |                 |                 |                              |      | XOR | 101 |
| INC r         | $r \leftarrow r+1$           | 00  | r   | ℓ                        | 00+              | ●     | ↑ | V   | ↑ | 0 | ↑ | 1            | 1               | 4               | CP                           | 111  |     |     |
| INC (HL)      | $(HL) \leftarrow (HL)+1$     | 00  | 110 | ℓ                        | 30+              | ●     | ↑ | V   | ↑ | 0 | ↑ | 1            | 3               | 11              | S=r, n, (HL), (IX+d), (IY+d) |      |     |     |
| INC (IX+d)    | $(IX+d) \leftarrow (IX+d)+1$ | 11  | 011 | 101<br>00 110 ℓ<br>← d → | DD<br>30+        | ●     | ↑ | V   | ↑ | 0 | ↑ | 3            | 6               | 23              |                              |      |     |     |
| INC (IY+d)    | $(IY+d) \leftarrow (IY+d)+1$ | 11  | 111 | 101<br>00 110 ℓ<br>← d → | FD<br>30+        | ●     | ↑ | V   | ↑ | 0 | ↑ | 3            | 6               | 23              | Mnemonic                     | ℓ    |     |     |
| DEC m         | $m \leftarrow m-1$           | 4 types available based on the above INC instruction                |     |                          |                  | ●     | ↑ | V   | ↑ | 1 | ↑ | 1*2          | 1*2             | 4*2             | m=r, (HL), (IX+d), (IY+d)    |      |     |     |
|               |                              |   |     |                          |                  |       |   |     |   |   |   | 1            | 3               | 11              |                              |      |     |     |
|               |                              |   |     |                          |                  |       |   |     |   |   |   | 3            | 6               | 23              |                              |      |     |     |
|               |                              |   |     |                          |                  |       |   |     |   |   |   | 3            | 6               | 23              |                              |      |     |     |

Note : V and P mean overflow and parity, respectively.  
 Flags : ● = unchanged  
 0 = reset  
 1 = set  
 X = undefined  
 ↑ = set or reset according to the result of the operation

\*1: depends on s.  
 \*2: depends on m.

Table 5 General purpose arithmetic and CPU control groups

| Mnemonic | Symbolic operation                | OP code  |            |            | HEX code<br>(Basic) | Flags |   |     |   |   |   | No. of<br>Bytes | No. of<br>M Cycles | No. of<br>T States | Comments                                   |
|----------|-----------------------------------|----------|------------|------------|---------------------|-------|---|-----|---|---|---|-----------------|--------------------|--------------------|--|
|          |                                   | 76       | 543        | 210        |                     | C     | Z | P/V | S | N | H |                 |                    |                    |  |
| DAA      | Decimal adjustment (add/subtract) | 00       | 100        | 111        | 27                  | ↑     | ↑ | P   | ↑ | ● | ↑ | 1               | 1                  | 4                  | Decimal adjust accumulator.                |
| CPL      | A ← A                             | 00       | 101        | 111        | 2F                  | ●     | ● | ●   | ● | 1 | 1 | 1               | 1                  | 4                  | Complement accumulator (one's complement). |
| NEG      | A ← 0-A                           | 11<br>01 | 101<br>000 | 101<br>100 | ED<br>44            | ↑     | ↑ | V   | ↑ | 1 | ↑ | 2               | 2                  | 8                  | Negate acc. (two's complement).            |
| CCF      | C ← C                             | 00       | 111        | 111        | 3F                  | ↑     | ● | ●   | ● | 0 | X | 1               | 1                  | 4                  | Complement carry flag.                     |
| SCF      | C ← 1                             | 00       | 110        | 111        | 37                  | 1     | ● | ●   | ● | 0 | 0 | 1               | 1                  | 4                  | Set carry flag.                            |
| NOP      | No operation                      | 00       | 000        | 000        | 00                  | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 4                  |  |
| HALT     | CPU halted                        | 01       | 110        | 110        | 76                  | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 4                  |  |
| DI       | IFF ← 0                           | 11       | 110        | 011        | F3                  | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 4                  | Interrupt not enable                       |
| EI       | IFF ← 1                           | 11       | 111        | 011        | FB                  | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 4                  | Interrupt enable                           |
| IM 0     | Set interrupt mode 0              | 11<br>01 | 101<br>000 | 101<br>110 | ED<br>46            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 8                  | Set interrupt mode.                        |
| IM 1     | Set interrupt mode 1              | 11<br>01 | 101<br>010 | 101<br>110 | ED<br>56            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 8                  |  |
| IM 2     | Set interrupt mode 2              | 11<br>01 | 101<br>011 | 101<br>110 | ED<br>5E            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 8                  |  |

Note : IFF indicates the interrupt enable flip-flop, CY indicates the carry flip-flop.  
 Flags : ●=unchanged, 0=reset, 1=set, X=undefined, ↑=set or reset according to the result of the operation

Table 6 16-bit arithmetic group

| Mnemonic   | Symbolic operation | OP code  |            |            | HEX code<br>(Basic) | Flags |   |     |   |   |   | No. of<br>Bytes | No. of<br>M Cycles | No. of<br>T States | Comments |          |
|------------|--------------------|----------|------------|------------|---------------------|-------|---|-----|---|---|---|-----------------|--------------------|--------------------|----------|----------|
|            |                    | 76       | 543        | 210        |                     | C     | Z | P/V | S | N | H |                 |                    |                    | ss       | Reg.     |
| ADD HL, ss | HL ← HL + ss       | 00       | ss1        | 001        | 09+                 | ↑     | ● | ●   | ● | 0 | X | 1               | 3                  | 11                 | ss       | Reg.     |
| ADC HL, ss | HL ← HL + ss + C   | 11<br>01 | 101<br>ss1 | 101<br>010 | ED<br>4A+           | ↑     | ↑ | V   | ↑ | 0 | X | 2               | 4                  | 15                 | 00<br>01 | BC<br>DE |
| SBC HL, ss | HL ← HL - ss - C   | 11<br>01 | 101<br>ss0 | 101<br>010 | ED<br>42+           | ↑     | ↑ | V   | ↑ | 1 | X | 2               | 4                  | 15                 | 10<br>11 | HL<br>SP |
| ADD IX, pp | IX ← IX + pp       | 11<br>00 | 011<br>pp1 | 101<br>001 | DD<br>09+           | ↑     | ● | ●   | ● | 0 | X | 2               | 4                  | 15                 | pp       | Reg.     |
| ADD IY, rr | IY ← IY + rr       | 11<br>00 | 111<br>rr1 | 101<br>001 | FD<br>09+           | ↑     | ● | ●   | ● | 0 | X | 2               | 4                  | 15                 | 00<br>01 | BC<br>DE |
| INC ss     | ss ← ss + 1        | 00       | ss0        | 011        | 03+                 | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 6                  | 10       | IX       |
| INC IX     | IX ← IX + 1        | 11<br>00 | 011<br>100 | 101<br>011 | DD<br>23            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 10                 | 11       | SP       |
| INC IY     | IY ← IY + 1        | 11<br>00 | 111<br>100 | 101<br>011 | FD<br>23            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 10                 | rr       | Reg.     |
| DEC ss     | ss ← ss - 1        | 00       | ss1        | 011        | 0B+                 | ●     | ● | ●   | ● | ● | ● | 1               | 1                  | 6                  | 00       | BC       |
| DEC IX     | IX ← IX - 1        | 11<br>00 | 011<br>101 | 101<br>011 | DD<br>2B            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 10                 | 01<br>10 | DE<br>IY |
| DEC IY     | IY ← IY - 1        | 11<br>00 | 111<br>101 | 101<br>011 | FD<br>2B            | ●     | ● | ●   | ● | ● | ● | 2               | 2                  | 10                 | 11       | SP       |

Note : ss is any of the register pairs BC, DE, HL, SP.  
 pp is any of the register pairs BC, DE, IX, SP.  
 rr is any of the register pairs BC, DE, IY, SP.  
 Flags : ●=unchanged, 0=reset, 1=set, X=undefined, ↑=set or reset according to the result of the operation

SHARP

Table 7 Rotate and shift groups

| Mnemonic   | Symbolic operation | OP code |     |     | HEX code (Basic) | Flags |   |     |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments |  |         |
|------------|--------------------|---------|-----|-----|------------------|-------|---|-----|---|---|--------------|-----------------|-----------------|----------|--|---------|
|            |                    | 76      | 543 | 210 |                  | C     | Z | P/V | S | N |              |                 |                 |          | H  |         |
| RLCA       |                    | 00      | 000 | 111 | 07               | ↑     | ● | ●   | ● | 0 | 0            | 1               | 1               | 4        | Rotate left circular accumulator.                                      |         |
| RLA        |                    | 00      | 010 | 111 | 17               | ↑     | ● | ●   | ● | 0 | 0            | 1               | 1               | 4        | Rotate left accumulator.   |         |
| RRCA       |                    | 00      | 001 | 111 | 0F               | ↑     | ● | ●   | ● | 0 | 0            | 1               | 1               | 4        | Rotate right circular accumulator.                                     |         |
| RRA        |                    | 00      | 011 | 111 | 1F               | ↑     | ● | ●   | ● | 0 | 0            | 1               | 1               | 4        | Rotate right accumulator.  |         |
| RLCr       |                    | 11      | 001 | 011 | CB               | ↑     | ↑ | P   | ↑ | 0 | 0            | 2               | 2               | 8        | Rotate left circular register r.                                       |         |
| RLC (HL)   |                    | 00      | k   | r   | 00+              | ↑     | ↑ | P   | ↑ | 0 | 0            | 2               | 4               | 15       | r   Reg.   |         |
| RLC (IX+d) |                    | 11      | 011 | 101 | DD               | ↑     | ↑ | P   | ↑ | 0 | 0            | 4               | 6               | 23       | 000   B  |         |
|            |                    | 11      | 001 | 011 | CB               |       |   |     |   |   |              |                 |                 |          |  | 001   C |
|            |                    | 00      | k   | 110 | 06+              |       |   |     |   |   |              |                 |                 |          |  | 010   D |
| RLC (IY+d) |                    | 00      | k   | 110 | 06+              |       |   |     |   |   |              |                 |                 |          | 011   E  |         |
|            |                    | 11      | 111 | 101 | FD               | ↑     | ↑ | P   | ↑ | 0 | 0            | 4               | 6               | 23       | 100   H  |         |
|            |                    | 11      | 001 | 011 | CB               |       |   |     |   |   |              |                 |                 |          |  | 101   L |
|            |                    | 00      | k   | 110 | 06+              |       |   |     |   |   |              |                 |                 |          | 111   A  |         |
| RL m       |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            |                 |                 |          | Mnemonic   k   |         |
| RRC m      |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            |                 |                 |          | RLC   000  |         |
| RR m       |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            | 2*              | 2*              | 8*       | RRC   001  |         |
| SLA m      |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            | 4               | 4               | 15       | RL   010   |         |
| SRA m      |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            | 4               | 6               | 23       | RR   011   |         |
| SRL m      |                    |         |     |     |                  | ↑     | ↑ | P   | ↑ | 0 | 0            | 4               | 6               | 23       | SLA   100  |         |
|            |                    |         |     |     |                  |       |   |     |   |   |              |                 |                 |          | SRA   101  |         |
|            |                    |         |     |     |                  |       |   |     |   |   |              |                 |                 |          | SRL   111  |         |
|            |                    |         |     |     |                  |       |   |     |   |   |              |                 |                 |          | m=r, (HL), (IX+d), (IY+d)  |         |
|            |                    |         |     |     |                  |       |   |     |   |   |              |                 |                 |          | *depends on m.   |         |
| RLD        |                    | 11      | 101 | 101 | ED               | ●     | ↑ | P   | ↑ | 0 | 0            | 2               | 5               | 18       | Rotate digit left and right between the accumulator and location (HL). |         |
| RRD        |                    | 01      | 101 | 111 | 6F               |       |   |     |   |   |              |                 |                 |          | The content of the upper half of the accumulator is unaffected.        |         |
|            |                    | 11      | 101 | 101 | ED               | ●     | ↑ | P   | ↑ | 0 | 0            | 2               | 5               | 18       |  |         |
|            |                    | 01      | 100 | 111 | 67               |       |   |     |   |   |              |                 |                 |          |  |         |

Flags : ● = unchanged  
 0 = reset  
 1 = set  
 × = undefined  
 ↑ = set or reset according to the result of the operation

SHARP

Table 8 Bit set, reset and test group

| Mnemonic      | Symbolic operation      | OP code                    |     |     | HEX code<br>(Basic) | Flags |   |     |   |    |    | No. of Bytes | No. of M Cycles | No. of T States | Comments                                      |            |
|---------------|-------------------------|----------------------------|-----|-----|---------------------|-------|---|-----|---|----|----|--------------|-----------------|-----------------|---|------------|
|               |                         | 76                         | 543 | 210 |                     | C     | Z | P/V | S | N  | H  |              |                 |                 |   |            |
| BIT b, r      | $Z \leftarrow r_b$      | 11 001 011                 | CB  | ●   | ↓                   | X     | X | 0   | 1 | 2  | 2  | 8            | r               | Reg.            |   |            |
|               |                         | 01 b r                     | 40+ |     |                     |       |   |     |   |    |    |              |                 |                 | 000   | B          |
| BIT b, (HL)   | $Z \leftarrow (HL)_b$   | 11 001 011                 | CB  | ●   | ↓                   | X     | X | 0   | 1 | 2  | 3  | 12           |                 |                 | 001   | C          |
|               |                         | 01 b 110                   | 46+ |     |                     |       |   |     |   |    |    |              |                 | 010             | D   |            |
| BIT b, (IX+d) | $Z \leftarrow (IX+d)_b$ | 11 011 101                 | DD  | ●   | ↓                   | X     | X | 0   | 1 | 4  | 5  | 20           |                 |                 | 011   | E          |
|               |                         | 11 001 011                 | CB  |     |                     |       |   |     |   |    |    |              |                 | 100             | H   |            |
|               |                         | $\leftarrow d \rightarrow$ |     |     |                     |       |   |     |   |    |    |              |                 | 101             | L   |            |
|               |                         | 01 b 110                   | 46+ |     |                     |       |   |     |   |    |    |              |                 | 111             | A   |            |
| BIT b, (IY+d) | $Z \leftarrow (IY+d)_b$ | 11 111 101                 | FD  | ●   | ↓                   | X     | X | 0   | 1 | 4  | 5  | 20           |                 |                 | b   | Bit Tested |
|               |                         | 11 001 011                 | CB  |     |                     |       |   |     |   |    |    |              |                 | 000             | 0   |            |
|               |                         | $\leftarrow d \rightarrow$ |     |     |                     |       |   |     |   |    |    |              |                 | 001             | 1   |            |
|               |                         | 01 b 110                   | 46+ |     |                     |       |   |     |   |    |    |              |                 | 010             | 2   |            |
| SET b, r      | $r_b \leftarrow 1$      | 11 001 011                 | CB  | ●   | ●                   | ●     | ● | ●   | ● | 2  | 2  | 8            |                 |                 | 011   | 3          |
| SET b, (HL)   | $(HL)_b \leftarrow 1$   | 11 001 011                 | CB  | ●   | ●                   | ●     | ● | ●   | ● | 2  | 4  | 15           |                 |                 | 100   | 4          |
|               |                         | a b 110                    | 06+ |     |                     |       |   |     |   |    |    |              |                 | 101             | 5   |            |
| SET b, (IX+d) | $(IX+d)_b \leftarrow 1$ | 11 011 101                 | DD  | ●   | ●                   | ●     | ● | ●   | ● | 4  | 6  | 23           |                 |                 | 110   | 6          |
|               |                         | 11 001 011                 | CB  |     |                     |       |   |     |   |    |    |              |                 | 111             | 7   |            |
|               |                         | $\leftarrow d \rightarrow$ |     |     |                     |       |   |     |   |    |    |              |                 |                 |   |            |
|               |                         | a b 110                    | 06+ |     |                     |       |   |     |   |    |    |              |                 |                 |   |            |
| SET b, (IY+d) | $(IY+d)_b \leftarrow 1$ | 11 111 101                 | FD  | ●   | ●                   | ●     | ● | ●   | ● | 4  | 6  | 23           | Mnemonic        | a               |   |            |
|               |                         | 11 001 011                 | CB  |     |                     |       |   |     |   |    |    |              |                 | SET             | 11  |            |
|               |                         | $\leftarrow d \rightarrow$ |     |     |                     |       |   |     |   |    |    |              |                 | RES             | 10  |            |
|               |                         | a b 110                    | 06+ |     |                     |       |   |     |   |    |    |              |                 |                 |   |            |
| RES b, m      | $m_b \leftarrow 0$      |                            |     |     |                     |       |   |     |   | 2* | 2* | 8*           |                 |                 | m=r, (HL),<br>(IX+d), (IY+d)<br>*depends on m |            |
|               |                         |                            |     |     |                     |       |   |     |   | 2  | 4  | 15           |                 |                 |   |            |
|               |                         |                            |     |     |                     |       |   |     |   | 4  | 6  | 23           |                 |                 |   |            |
|               |                         |                            |     |     |                     |       |   |     |   | 4  | 6  | 23           |                 |                 |   |            |

Note : The notation  $m_b$  indicates bit b (0 to 7) or location m.  
 Flags : ● = unchanged  
 0 = reset  
 1 = set  
 X = undefined  
 ↓ = set or reset according to the result of the operation



Table 9 Jump group

| Mnemonic  | Symbolic operation                                  | OP code    |     |     | HEX code (Basic) | Flags |   |     |   |   |   | No. of Bytes | No. of M Cycles | No. of T States | Comments  |   |
|-----------|---|------------|-----|-----|------------------|-------|---|-----|---|---|---|--------------|-----------------|-----------------|-----------|---|
|           |   | 76         | 543 | 210 |                  | C     | Z | P/V | S | N | H |              |                 |                 |           |   |
| JP nn     | PC ← nn   | 11 000 011 | C3  | ●   | ●                | ●     | ● | ●   | ● | ● | 3 | 3            | 10              | cc              | Condition |   |
|           |   | ← n →      |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           |   | ← n →      |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
| JP cc, nn | If condition cc is true PC ← nn, otherwise continue | 11 cc 010  | C2+ | ●   | ●                | ●     | ● | ●   | ● | 3 | 3 | 10           | 000             | NZ              |           |   |
|           |   | ← n →      |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           |   | ← n →      |     |     |                  |       |   |     |   | 3 | 3 | 10           |                 |                 | 001       | Z |
| JR e      | PC ← PC+e   | 00 011 000 | 18  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 12           | 100             | PO              |           |   |
|           |   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           |   |            |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
| JR C, e   | If C=1  | 00 111 000 | 38  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 12           | 101             | PE              |           |   |
|           | PC ← PC+e   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           | If C=0 continue                                     |            |     |     |                  |       |   |     |   | 2 | 2 | 7            | 110             | P               |           |   |
|           |   |            |     |     |                  |       |   |     |   |   |   |              | 111             | M               |           |   |
| JR NC, e  | If C=0  | 00 110 000 | 30  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 12           | NZ              | non-zero        |           |   |
|           | PC ← PC+e   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           | If C=1 continue                                     |            |     |     |                  |       |   |     |   | 2 | 2 | 7            | Z               | zero            |           |   |
|           |   |            |     |     |                  |       |   |     |   |   |   |              | C               | carry           |           |   |
| JR Z, e   | If Z=1  | 00 101 000 | 28  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 12           | PO              | parity odd      |           |   |
|           | PC ← PC+e   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           | If Z=0 continue                                     |            |     |     |                  |       |   |     |   | 2 | 2 | 7            | PE              | parity even     |           |   |
|           |   |            |     |     |                  |       |   |     |   |   |   |              | P               | sign positive   |           |   |
| JR NZ, e  | If Z=0  | 00 100 000 | 20  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 12           | M               | sign negative   |           |   |
|           | PC ← PC+e   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           | If Z=1 continue                                     |            |     |     |                  |       |   |     |   | 2 | 2 | 7            |                 |                 |           |   |
|           |   |            |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
| JP (HL)   | PC ← HL   | 11 101 001 | E9  | ●   | ●                | ●     | ● | ●   | ● | 1 | 1 | 4            |                 |                 |           |   |
| JP (IX)   | PC ← IX   | 11 011 101 | DD  | ●   | ●                | ●     | ● | ●   | ● | 2 | 2 | 8            |                 |                 |           |   |
|           |   | 11 101 001 | E9  |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
| JP (IY)   | PC ← IY   | 11 111 101 | FD  | ●   | ●                | ●     | ● | ●   | ● | 2 | 2 | 8            |                 |                 |           |   |
|           |   | 11 101 001 | E9  |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
| DJNZ, e   | If B ← B-1  | 00 010 000 | 10  | ●   | ●                | ●     | ● | ●   | ● | 2 | 3 | 13           |                 |                 |           |   |
|           | B ≠ 0   | ← e-2 →    |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |
|           | PC ← PC+1   |            |     |     |                  |       |   |     |   | 2 | 2 | 8            |                 |                 |           |   |
|           | If B=0 continue                                     |            |     |     |                  |       |   |     |   |   |   |              |                 |                 |           |   |

Note : e represents the extension in the relative addressing mode.  
 e is a signed two's complement number in the range <-126, 129>  
 e - 2 in the opcode provides an effective address of pc+e as PC is incremented by 2 prior to the addition of e.  
 e itself is obtained from opcode position.

Flags : ● = unchanged  
 0 = reset  
 1 = set  
 X = undefined  
 ‡ = set or reset according to the result of the operation

Table 10 Call and return group

| Mnemonic    | Symbolic operation   | OP code |     |     | HEX code<br>(Basic) | Flags |   |     |   |   |   | No. of<br>Bytes | No. of<br>M Cycles | No. of<br>T States | Comments |           |
|-------------|--|---------|-----|-----|---------------------|-------|---|-----|---|---|---|-----------------|--------------------|--------------------|----------|-----------|
|             |  | 76      | 543 | 210 |                     | C     | Z | P/V | S | N | H |                 |                    |                    | cc       | Condition |
| CALL nn     | (SP-1) ← PC <sub>H</sub>                                     | 11      | 001 | 101 | CD                  | ●     | ● | ●   | ● | ● | ● | 3               | 5                  | 17                 |          |           |
|             | (SP-2) ← PC <sub>L</sub>                                     | ←       | n   | →   |                     |       |   |     |   |   |   |                 |                    |                    |          |           |
|             | PC ← nn  | ←       | n   | →   |                     |       |   |     |   |   |   |                 |                    |                    |          |           |
| CALL cc, nn | If condition cc is false continue, otherwise same as CALL nn | 11      | cc  | 100 | C4+                 | ●     | ● | ●   | ● | ● | ● | 3               | 5                  | 17                 |          |           |
|             |  | ←       | n   | →   |                     |       |   |     |   |   |   | 3               | 3                  | 10                 |          |           |
| RET         | PC <sub>L</sub> ← (SP)<br>PC <sub>H</sub> ← (SP+1)           | 11      | 001 | 001 | C9                  | ●     | ● | ●   | ● | ● | ● | 1               | 3                  | 10                 |          |           |
|             |  |         |     |     |                     |       |   |     |   |   |   |                 |                    |                    |          |           |
| RET cc      | If condition cc is false continue, otherwise same as RET     | 11      | cc  | 000 | C0+                 | ●     | ● | ●   | ● | ● | ● | 1               | 3                  | 11                 |          |           |
|             |  |         |     |     |                     |       |   |     |   |   |   | 1               | 1                  | 5                  | r        | p         |
| RETI        | Return from interrupt  | 11      | 101 | 101 | ED                  | ●     | ● | ●   | ● | ● | ● | 2               | 4                  | 14                 |          |           |
|             |  | 01      | 001 | 101 | 4D                  |       |   |     |   |   |   |                 |                    |                    |          |           |
| RETN        | Return from non-maskable interrupt                           | 11      | 101 | 101 | ED                  | ●     | ● | ●   | ● | ● | ● | 2               | 4                  | 14                 |          |           |
|             |  | 01      | 000 | 101 | 45                  |       |   |     |   |   |   |                 |                    |                    |          |           |
| RST p       | (SP-1) ← PC <sub>H</sub>                                     | 11      | t   | 111 | C7+                 | ●     | ● | ●   | ● | ● | ● | 1               | 3                  | 11                 |          |           |
|             | (SP-2) ← PC <sub>L</sub>                                     |         |     |     |                     |       |   |     |   |   |   |                 |                    |                    |          |           |
|             | PC <sub>H</sub> ← 0<br>PC <sub>L</sub> ← p                   |         |     |     |                     |       |   |     |   |   |   |                 |                    |                    |          |           |

Flags : ● = unchanged  
 0 = reset  
 1 = set  
 X = undefined  
 † = set or reset according to the result of the operation





Table 11 Input and output group

| Mnemonic   | Symbolic operation  | OP code                  |     |     | HEX code<br>(Basic) | Flags |        |     |   |   |   | No. of<br>Bytes | No. of<br>M Cycles             | No. of<br>T States | Comments  |
|------------|---|--------------------------|-----|-----|---------------------|-------|--------|-----|---|---|---|-----------------|--------------------------------|--------------------|---|
|            |   | 76                       | 543 | 210 |                     | C     | Z      | P/V | S | N | H |                 |                                |                    |   |
| IN A, (n)  | A ← (n)   | 11 011 011               |     |     | DB                  | ●     | ●      | ●   | ● | ● | ● | 2               | 3                              | 11                 | n → A <sub>0</sub> -A <sub>7</sub><br>Acc → A <sub>8</sub> -A <sub>15</sub>           |
|            | ← n →   |                          |     |     |                     |       |        |     |   |   |   |                 |                                |                    |   |
| IN r, (C)  | r ← (C)   | 11 101 101               |     |     | ED                  | ●     | ↓      | P   | ↓ | 0 | ↓ | 2               | 3                              | 12                 |   |
|            |   | 01 r 000                 |     |     | 40+                 |       |        |     |   |   |   |                 |                                |                    |   |
| INI        | (HL) ← (C)<br>B ← B-1<br>HL ← HL+1                        | 11 101 101<br>10 100 010 |     |     | ED<br>A2            | X     | ↓<br>① | X   | X | 1 | X | 2               | 4                              | 16                 | C → A <sub>0</sub> -A <sub>7</sub><br>B → A <sub>8</sub> -A <sub>15</sub>             |
| INIR       | (HL) ← (C)<br>B ← B-1<br>HL ← HL+1<br>Repeat until<br>B=0 | 11 101 101<br>10 110 010 |     |     | ED<br>B2            | X     | 1<br>② | X   | X | 1 | X | 2<br>2          | 5<br>(If B≠0)<br>4<br>(If B=0) | 21<br>16           | r   Reg.<br>000   B<br>001   C<br>010   D<br>011   E<br>100   H<br>101   L<br>111   A |
| IND        | (HL) ← (C)<br>B ← B-1<br>HL ← HL-1                        | 11 101 101<br>10 101 010 |     |     | ED<br>AA            | X     | ↓<br>① | X   | X | 1 | X | 2               | 4                              | 16                 |   |
| INDR       | (HL) ← (C)<br>B ← B-1<br>HL ← HL-1<br>Repeat until<br>B=0 | 11 101 101<br>10 111 010 |     |     | ED<br>BA            | X     | 1<br>② | X   | X | 1 | X | 2<br>2          | 5<br>(If B≠0)<br>4<br>(If B=0) | 21<br>16           |   |
| OUT (n), A | (n) ← A<br>← n →  | 11 010 011               |     |     | D3                  | ●     | ●      | ●   | ● | ● | ● | 2               | 3                              | 11                 | n → (A-BUS) <sub>0-7</sub><br>Acc → (A-BUS) <sub>8-15</sub>                           |
| OUT (C), r | (C) ← r   | 11 101 101               |     |     | ED                  | ●     | ●      | ●   | ● | ● | ● | 2               | 3                              | 12                 |   |
|            |   | 01 r 001                 |     |     | 41+                 |       |        |     |   |   |   |                 |                                |                    |   |
| OUTI       | (C) ← (HL)<br>B ← B-1<br>HL ← HL+1                        | 11 101 101<br>10 100 011 |     |     | ED<br>A3            | X     | ↓<br>① | X   | X | 1 | X | 2               | 4                              | 16                 | C → A <sub>0</sub> -A <sub>7</sub>  |
| OTIR       | (C) ← (HL)<br>B ← B-1<br>HL ← HL+1<br>Repeat until<br>B=0 | 11 101 101<br>10 110 011 |     |     | ED<br>B3            | X     | 1<br>② | X   | X | 1 | X | 2<br>2          | 5<br>(If B≠0)<br>4<br>(If B=0) | 21<br>16           | B → A <sub>8</sub> -A <sub>15</sub>   |
| OUTD       | (C) ← (HL)<br>B ← B-1<br>HL ← HL-1                        | 11 101 101<br>10 101 011 |     |     | ED<br>AB            | X     | ↓<br>① | X   | X | 1 | X | 2               | 4                              | 16                 |   |
| OTDR       | (C) ← (HL)<br>B ← B-1<br>HL ← HL-1<br>Repeat until<br>B=0 | 11 101 101<br>10 111 011 |     |     | ED<br>BB            | X     | 1<br>② | X   | X | 1 | X | 2<br>2          | 5<br>(If B≠0)<br>4<br>(If B=0) | 21<br>16           |   |

Note : ① If the result of B-1 is zero the Z flag is set, otherwise it is reset.

② Z flag is set upon instruction completion only.

Flags : ● = unchanged

0 = reset

1 = set

X = undefined

↓ = set or reset according to the result of the operation

SHARP