

4







3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

LOC	DIST	REVISIONS					
		F	LTR	DESCRIPTION	DATE	BY	APP'D
AD	47	M1		REVISED PER ECO-08-018086	05DEC08	DH	AS

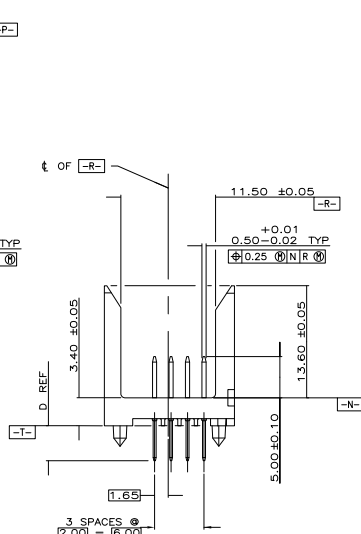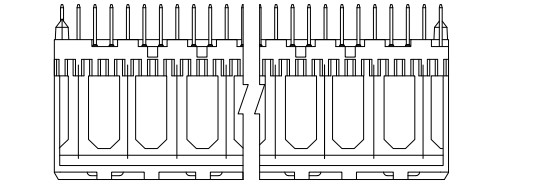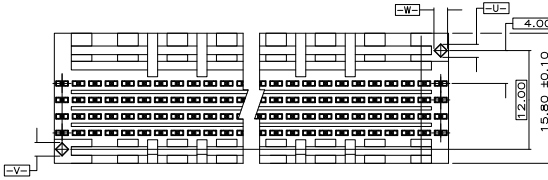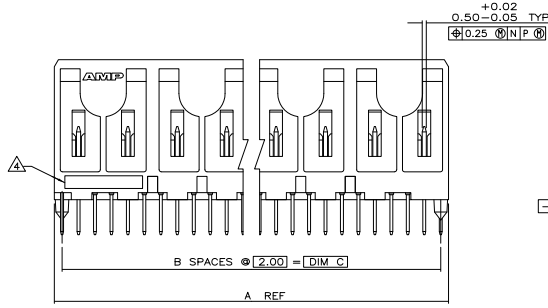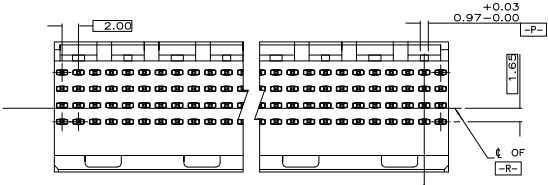

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCPO00 G30A 32250.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: UNDERPLATE (ENTIRE CONTACT): 0.00127 MIN NICKEL. ON MATING SURFACES: CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT. ON LEADS: 0.00381 MIN TIN-LEAD OVER UNDERPLATE. LUBRICATION (ENTIRE CONTACT): SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- △ PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.

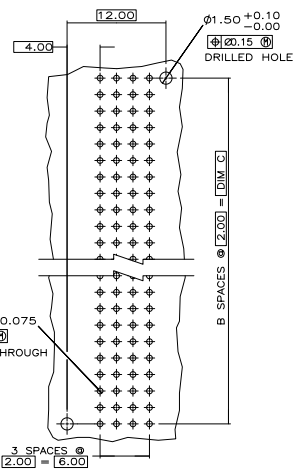

RECOMMENDED CIRCUIT PATTERN PER IPC-D300 TYPE II, CLASS C (COMPONENT SIDE)

4.25	70.00	35	71.88	3	144	536513-5
4.25	94.00	47	95.88	3	192	536513-4
4.25	46.00	23	47.88	3	96	536513-3
4.25	22.00	11	23.88	3	48	536513-2
4.25	10.00	5	11.88	3	24	536513-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TO MANUFACTURER'S SPECIFICATIONS	DATE: 04/01/93	BY: D.R.BENDER
0 PLG ±	1 PLG ±	2 PLG ± 0.13	3 PLG ±
4 PLG ±	ANGLES ±	FINISH	

DATE: 04/02/93	BY: D. BAUCHTLE	DATE: 04/02/93	BY: S. J. HEADER
PROJECT SPEC:	APPLICATION SPEC:	SIZE: A2	CAGE CODE: 00779
WEIGHT:	SCALE: 4:1	DRAWING NO: 536513	RESTRICTED TO: M1

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

PIN ASSEMBLY, SIGNAL MODULE, Z-PACK 2mm FB
2mm

SCALE: 4:1 SHEET: 1 of 1 REV: M1