





8	7	6	5	4	3	2	1
DATE PREPARED BY: [blank]	DESIGNED BY: [blank]	REVISIONS					
APPROVED BY: [blank]	BY: [blank]	REV	DATE	DESCRIPTION	BY	CHK	APP

REV	DATE	DESCRIPTION	BY	CHK	APP
0	00	RELEASED PER 0312-0165-02	DAVIDSON	DAV	MFS
A		REV PER 0512-0442-03	ANDREWS	RO	BP
B		REV PER 0512-0159-02	DAVIDSON	DAV	BP

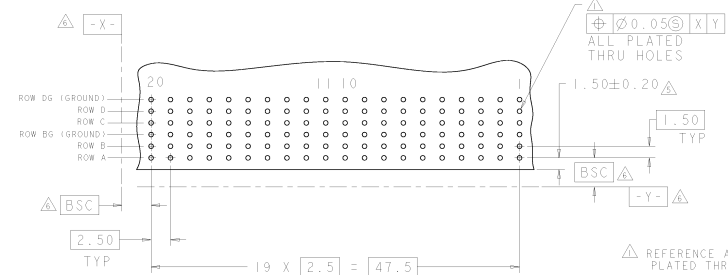

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
 - △ MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
 - △ FINISH: CONTACT AND SHIELD MATING AREA - 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL
COMPLIANT PIN AREA - 0.5µm MIN BRIGHT TIN-LEAD OVER 1.27µm MIN NICKEL
 - △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
 - △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
 - △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELCORRE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT, DAUGHTER BOARD, COMPONENT SIDE SHOWN SCALE: 4:1

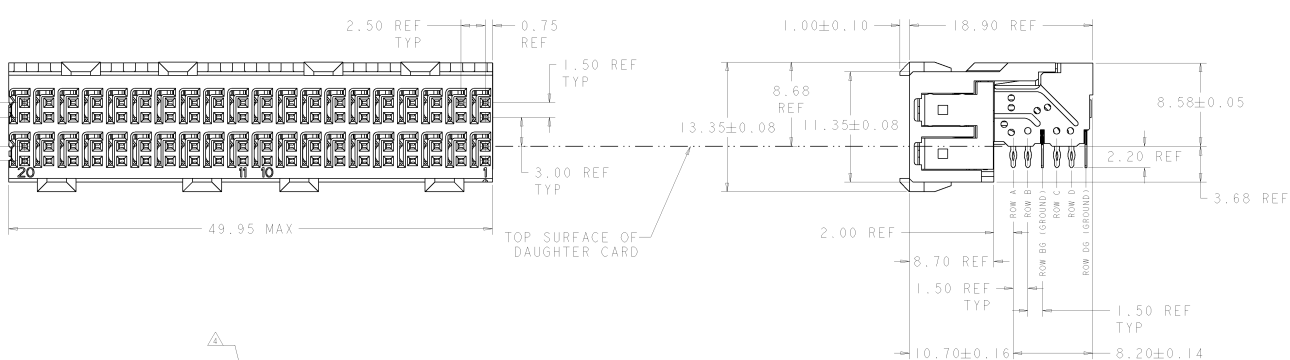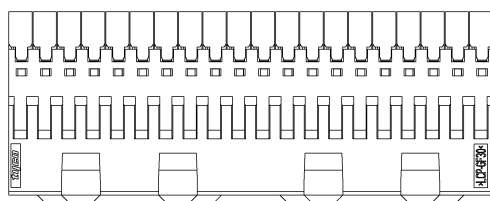

1469077-1
PART NUMBER

1469077-1 PART NUMBER		1469077-1 PART NUMBER	
MANUFACTURER MFG PART NUMBER MFG DATE	MFG QTY MFG LOT MFG DATE	CUSTOMER SPEC PART NUMBER REV DATE	CUSTOMER SPEC PART NUMBER REV DATE