

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
FT	0	P	LTR	DESCRIPTION	DATE	BY	APPD
		L		REVISED PER ECO-07-010234	5/2/07	SS	GS
		L1		REVISED PER ECO-09-020935	09SEP09	KK	AEG

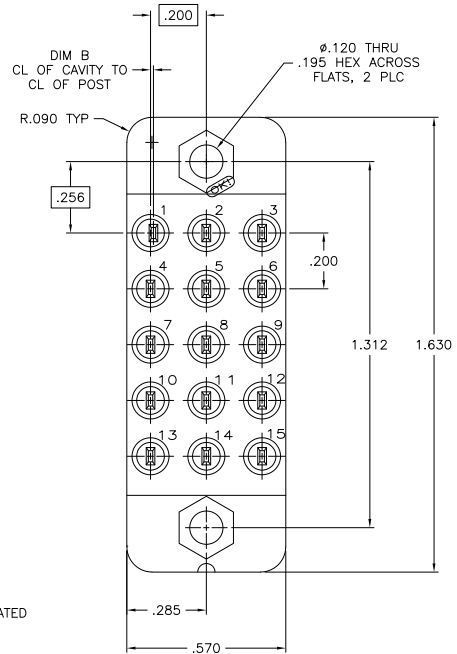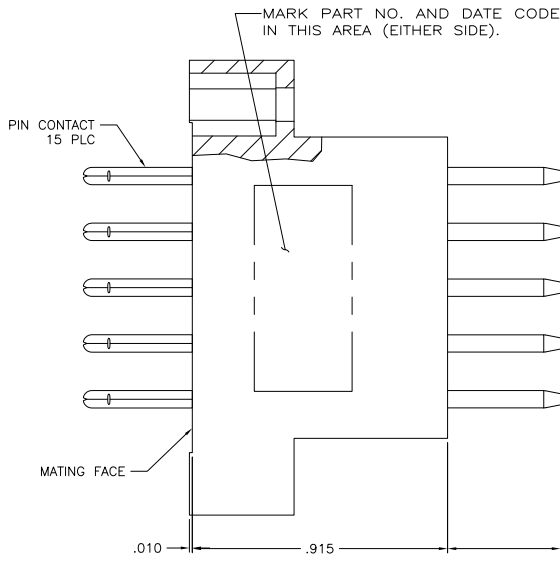

- MATES WITH 205608 HOUSING.
- CONTACTS ARE AUTOMATICALLY WIREABE.
- FOR PANEL CUT OUT SEE DWG. 205607 CUSTOMER.
- POST LENGTH WILL ACCEPT 3 TERMINATIONS.
- THE MAX. WIRE TO BE USED WITH THIS CONNECTOR IS NO. 24 AWG.
- GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
- POSTS PLATED TIN-LEAD PER MIL-T-10727 OVER NICKEL PER QQ-N-290.
- POSTS PLATED TIN PER MIL-T-10727 OVER NICKEL PER QQ-N-290.
- OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSELETE	OBSELETE	.017	.215	205628-5
OBSELETE	OBSELETE	.017	.215	205628-3
OBSELETE	OBSELETE	.000	.810	205628-2
OBSELETE	OBSELETE	.000	.810	205628-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR S. SCHLEGEL 4/8/05	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		OK C. STEINHAWER 4/8/05	BLOCK ASSEMBLY, PIN, 15 POSN, AUTOWIRE POST, .200 GRID	
MATERIAL		APPC G. STEINHAWER 4/8/05	SIZE	RESTRICTED TO
FINISH		APPLICATION SPEC	A2 00779	205628
		WEIGHT	SCALE	SHEET
		CUSTOMER DRAWING	4:1	1 OF 1 REV L1

AMP 1471-9 REV 31MM2000

205628

A