


- △ BODY-MATL: BRASS PER MIL-C-50
 FINISH: PLATED GOLD .000030 THK PER MIL-G-45204 FOR A LENGTH OF .200 MIN FROM MATING END, .000100 MIN TIN-LEAD PER MIL-T-10727 IN WIRE BARREL AREA, BOTH OVER NICKEL .000050 THK PER QQ-N-290.
 SPRING-MATL: STAINLESS STEEL PER QQ-S-766.
 POST-MATL: BRASS PER ASTM-B-134.
 FINISH: PLATED MATTE TIN-LEAD PER MIL-T-10727 OVER NICKEL .000050 THK PER QQ-N-290.
- △ BODY-MATL: BRASS PER MIL-C-50.
 FINISH: PLATED GOLD .000030 THK PER MIL-G-45204 FOR A LENGTH OF .200 MIN FROM MATING END, .000100 MIN TIN PER MIL-T-10727 IN WIRE BARREL AREA, BOTH OVER NICKEL .000050 THK PER QQ-N-290.
 SPRING-MATL: STAINLESS STEEL PER QQ-S-766.
 POST-MATL: BRASS PER ASTM-B-134.
 FINISH: PLATED MATTE TIN PER MIL-T-10727 OVER NICKEL .000050 THK PER QQ-N-290.

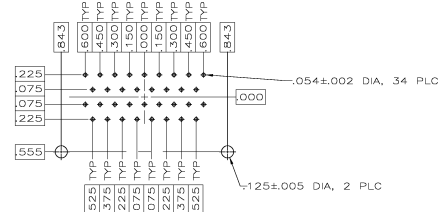

RECOMMENDED P.C. BOARD LAYOUT

△	213289-2
△	213289-1
△	CONTACT FINISH
△	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT		REVISED PER 0638-0127-05		ELECTRONIC CORPORATION	
REVISIONS		DATE		BY	
REV	DATE	DESCRIPTION	BY	CHK	APP
0		REVISED PER 0638-0127-05		SS	CS
DRAWING NO.		REV		DATE	
A100779		Q=213289		REVISED TO	
CUSTOMER DRAWING		SHEET 2-1		TOTAL 1	