
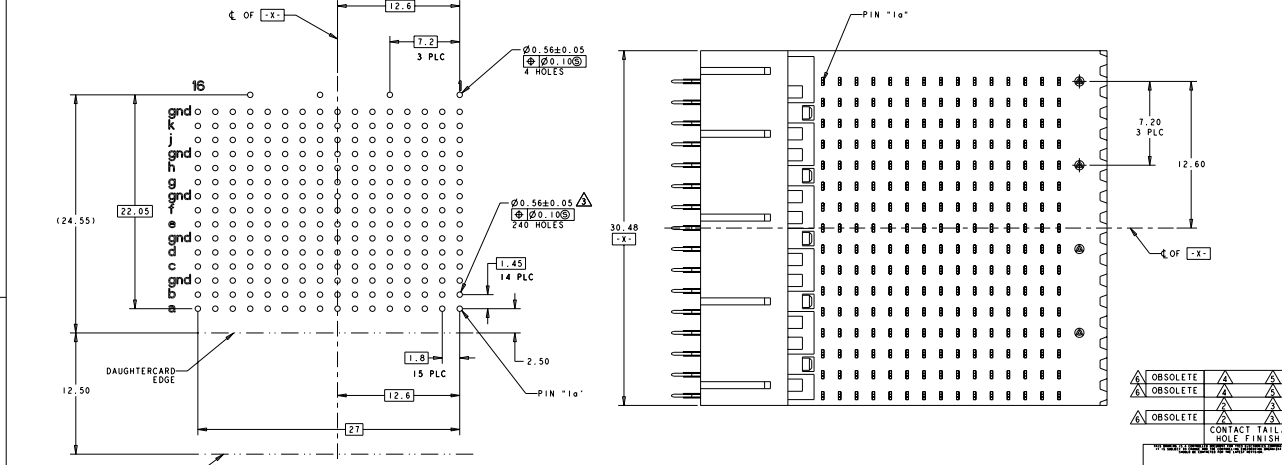


REV	DATE	DESCRIPTION	BY	CHK	APP
A	EC 0512-0341-04		PLM/DMH	BM	GG
A1	REVISED PER ECO-99-025699		PLM/DMH	KK	AEQ

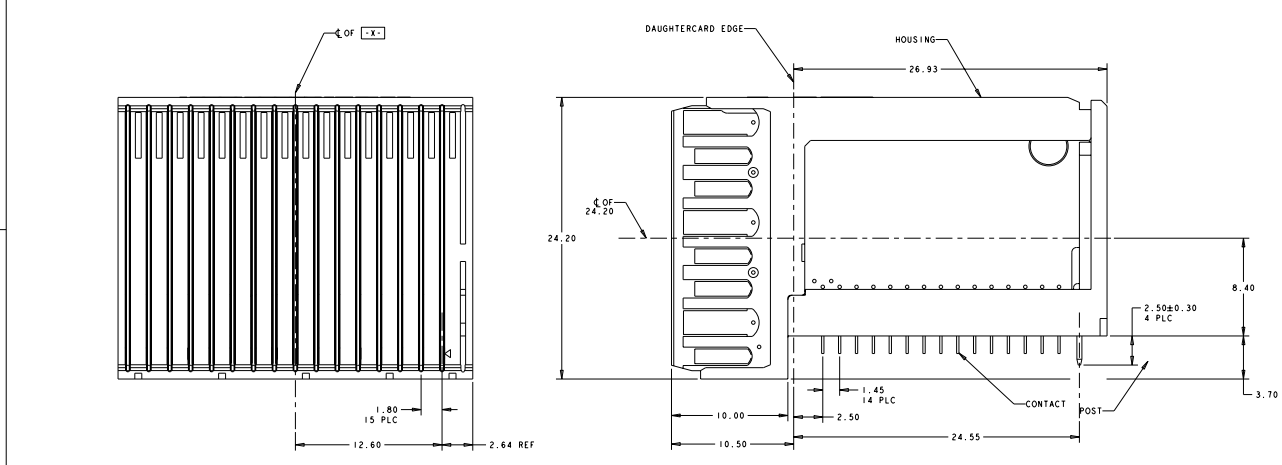

- △ HOUSING: LCP, UL94V-0, BLACK.  
CONTACT: PHOSPHOR BRONZE.  
POST: BRASS WIRE.
- △ CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA.  
1.27 μm MIN TIN-LEAD ON PCB TAIL.  
OVER 1.27 μm MIN NICKEL PER SAE AMS-QQ-W-290 OVER ALL.  
POST: 1.27 μm MIN NICKEL.
- △ MANUFACTURING TOLERANCE FOR A <math>\varnothing 0.56 \pm 0.05</math> FINISHED HOLE.  
DRILLED HOLE: <math>\varnothing 0.65 \pm 0.02</math>  
COPPER PLATE: 0.050-0.025  
TIN/LEAD PLATE: 0.0124-0.0038
- △ CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA.  
1.27 μm MIN MATTE TIN PER ASTM B 545 ON PCB TAIL.  
OVER 1.27 μm MIN NICKEL PER SAE AMS-QQ-W-290 OVER ALL.  
POST: 1.27 μm MIN NICKEL.
- △ MANUFACTURING TOLERANCE FOR A <math>\varnothing 0.575 \pm 0.045</math> FINISHED HOLE WITHOUT TIN LEAD PLATING.  
DRILLED HOLE: <math>\varnothing 0.65 \pm 0.02</math>  
COPPER PLATING: 0.025 - 0.050
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBsolete	CONTACT TAIL/ HOLE FINISH	DESCRIPTION	PART NO
△	△	DIFFERENTIAL PAIR, NONSEQUENTIAL	1410216-4
△	△	SINGLE END, NONSEQUENTIAL	1410216-3
△	△	DIFFERENTIAL PAIR, NONSEQUENTIAL	1410216-2
△	△	SINGLE END, NONSEQUENTIAL	1410216-1

REVISED BY: PLM/DMH	DATE: 051203	REVISED BY: PLM/DMH	DATE: 051203
DESIGNED BY: PLM/DMH	DATE: 051203	DESIGNED BY: PLM/DMH	DATE: 051203
CHECKED BY: PLM/DMH	DATE: 051203	CHECKED BY: PLM/DMH	DATE: 051203
APPROVED BY: PLM/DMH	DATE: 051203	APPROVED BY: PLM/DMH	DATE: 051203