

# AN7118S


Low Voltage Dual 35mW Audio Power Amplifier Circuits (BTL 300mW)

■ Overview


The AN7118S is the ICs designed for power amplifier of low voltage operated compact radio and stereo tape recorder. Stereo operation is enabled due to incorporating two amplifiers on one chip. Miniaturization of cassette and high integration is realized due to SOP package.

■ Features

- Low voltage operation :  $V_{CC} = 1.8V$  to  $4.5V$
- Reduced voltage operation is available.
- Low pop noise when supply voltage is switched ON and OFF
- Stereo drive of  $4\Omega$  (speaker) to  $32\Omega$  (headphone) load is possible.

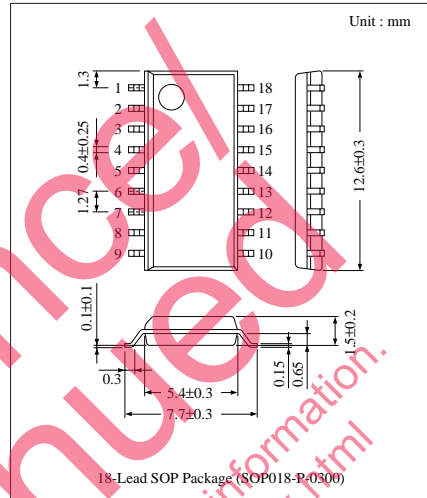

■ Block Diagram

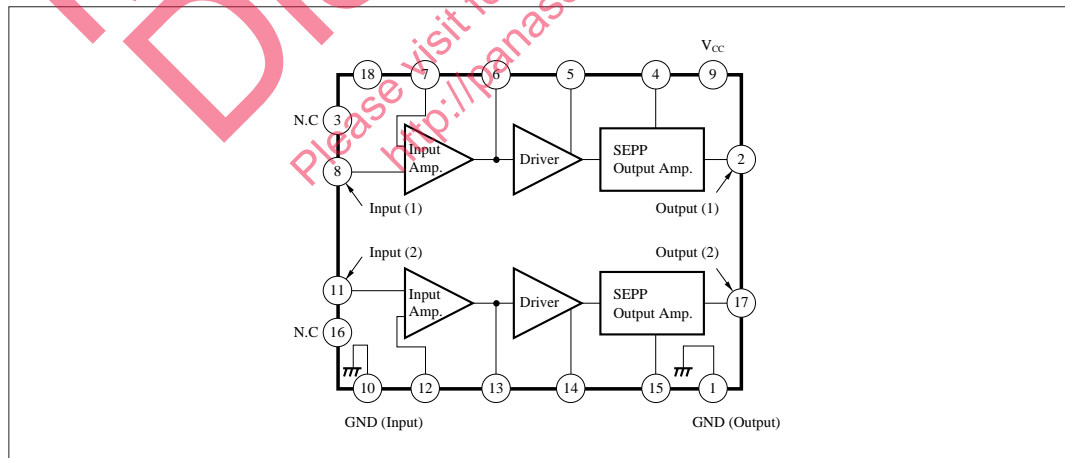

### ■ Pin Descriptions

Pin No.	Pin Name	Pin No.	Pin Name
1	GND (Output)	10	GND (Input)
2	Output Ch.1	11	Input Ch.2
3	NC	12	N.F.B
4	Bootstrap	13	Phase Compensation
5	Phase Compensation	14	Phase Compensation
6	Phase Compensation	15	Bootstrap
7	N.F.B	16	NC
8	Input Ch.1	17	Output Ch.2
9	V <sub>CC</sub>	18	Ripple Filter

### ■ Absolute Maximum Ratings (Ta= 25°C)


Parameter	Symbol	Rating	Unit
Supply Voltage	V <sub>CC</sub>	4.5	V
Supply Current	I <sub>CC</sub>	1	A
Power Dissipation	P <sub>D</sub>	400	mW
Operating Ambient Temperature	T <sub>opr</sub>	-20 ~ +75	°C
Storage Temperature	T <sub>stg</sub>	-50 ~ +125	°C

### ■ Electrical Characteristics (V<sub>CC</sub> = 3V, Ta = 25°C)


Parameter	Symbol	Condition	min.	typ.	max.	Unit
Quiescent Circuit Current	I <sub>CQ</sub>	V <sub>i</sub> = 0mV	—	13	18	mA
<DUAL (f=1kHz)>						
Voltage Gain	G <sub>v</sub>	V <sub>i</sub> = 1.5mV, R <sub>L</sub> = 32Ω	45	47	49	dB
Maximum Output	P <sub>O</sub>	THD = 10%, R <sub>L</sub> = 32Ω × 2ch.	—	33	—	mW
Total Harmonic Distortion	THD	V <sub>i</sub> = 1.5mV, R <sub>L</sub> = 32Ω × 2ch.	—	0.3	1	%
Output Noise Voltage	V <sub>no</sub>	R <sub>s</sub> = 10kΩ, DIN Audio Filter	—	0.5	1	mV
Input Resistance	R <sub>i</sub>		—	20	—	kΩ
Ripple Rejection Ratio	RR	V <sub>CC</sub> = 3V ± 200mV, f = 100Hz	—	35	—	dB

### ■ Application Circuit

AN7118S Dual Circuit

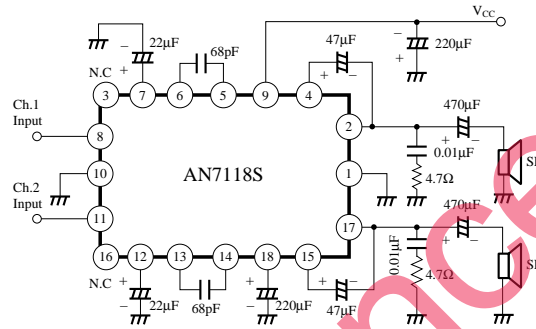

### ■ Characteristics Curve

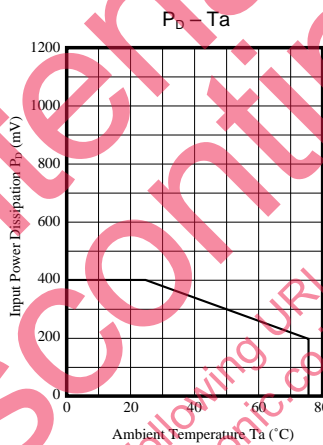

### ■ Supplementary Explanation of IC Characteristics

- Not necessary for input coupling capacitor. Input electric potential is about 0 bias, using PNP Tr for input stage.
- One chip dual amp. (Stereo operation)
- Battery operation is possible at 1.8V to 4.5V
- Decreased voltage operation is available, and suitable for a long battery operation.
- Load impedance can be driven from 4Ω, which makes it possible to use for both speaker and headphone.
- Small shock noise at power ON and OFF.

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.