

- Structure : Silicon Monolithic Integrated Circuit
- Product name : 1W+1W Stereo Speaker Amplifier/ Headphone Amplifier
- Type : **BH7884EFV**
- Features :
 - 1) Low Noise & High Power Speaker Amplifiers
 - 2) BassBoost mode for Speaker amplifiers
 - 3) Low noise VCA(Voltage Controlled Amplifiers) for Headphone amplifiers
 - 4) Various control functions
 - 5) Low Power Supply current

○Absolute Maximum Ratings(Ta=25°C)

Parameter	Limits	Unit
Supply voltage	+6.0	V
Power dissipation	1100 *	mW
Storage temperature	-55 ~ +125	°C
Operating temperature	-10 ~ +70	°C

※Deratings is done at 11mW/°C above Ta=25°C
(When mounting on a 70mmX70mmX1.6mm PCB board)

○Operating Range (Ta=25°C)

Parameter	Limits	Unit
Supply voltage	+3.0~+5.5	V

※This product is not designed for protection against radioactive rays.

Application example

The product described in this specification is designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use this product with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.


○Electrical characteristics (Unless otherwise noted, $V_{CC}=3.3V$, $T_a=25^{\circ}C$, $f=1kHz$, $400Hz\sim 30kHz$ BPF)

Parameter	Symbol	Limits			Unit	Conditions
		Min.	Typ.	Max.		
■ 1 CHIP						
Circuit current ACTV	I_A	—	9.0	18.0	mA	No signal ACTIVE
Circuit current SPND	I_S	—	0.2	10.0	uA	No signal SUSPEND
■ SP AMP						
Voltage gain1	G_{SP1}	9.0	12.0	15.0	dB	SE, $V_{in}=-18dBV, R_L=8\Omega$
Voltage gain2	G_{SP2}	15.2	18.2	21.2	dB	BTL, $V_{in}=-18dBV$
Distortion	D_{SP}	—	0.1	1.0	%	BTL, $V_{in}=-18dBV$
Maximum output level	V_{OSP}	2.2	5.2	—	dBV	BTL, $D_{SP}=1\%$
Output noise level	V_{NSP}	—	-97	-80	dBV	SE, DIN-Audio
Cross talk	CT_{SP}	—	-90	-80	dBV	SE, $V_{in}=-18dBV$, DIN-Audio
Output level on mute	MT_{SP}	—	-102	-80	dBV	BTL, $V_{in}=-18dBV$
■ HP AMP						
Voltage gain 3	G_{HP}	2.6	5.6	8.6	dB	VOL:MAX, $R_L=10k\Omega$, $V_{in}=-12dBV$
Voltage gain 4	G_{HP}	-10	-7	-4	dB	VOL:MAX, $R_L=32\Omega$, $V_{in}=-12dBV$
Distortion	D_{HP}	—	0.025	0.1	%	VOL:MAX, $R_L=32\Omega$, $V_{in}=-8dBV$
Variable width of volume	ΔG_{HP}	70	100	—	dB	VOL:MIN~MAX, $R_L=32\Omega$
Maximum output level	V_{OHP}	-2.0	1.0	—	dBV	VOL:MAX, $D_{HP}=1\%$, $R_L=10k\Omega$
Output noise level	V_{NHP}	—	-98	-80	dBV	VOL:MAX, $R_L=32\Omega$, DIN-Audio
Cross talk	CT_{HP}	—	-98	-80	dBV	VOL:MAX, $R_L=32\Omega$, $V_{in}=-12dBV$, DIN-Audio
Output level on mute	MT_{HP}	—	-110	-80	dBV	VOL:MAX, $R_L=32\Omega$, $V_{in}=-12dBV$, DIN-Audio
■ BEEP AMP						
Output voltage level	V_{BP}	0.8	1.25	—	Vpp	$V_{in}=1.3dBV, f=1kHz$, 20MHzLPF
■ BIAS						
Output voltage level	V_{BIAS}	1.4	1.7	2.0	V	No Signal

○Electrical characteristics (Unless otherwise noted, Vcc=3.3V, Ta=25°C, f=1kHz, 400Hz~30kHz BPF)

■CTRL						
ACTIVE mode	V _{11H}	VCC -0.3	—	VCC	V	Active mode. Hold Voltage of 11pin.
SUSPEND mode	V _{11L}	GND	—	0.3	V	Suspend mode. Hold Voltage of 11pin.
SP/ON mode	V _{2H}	VCC -0.3	—	VCC	V	SP/ON mode. Hold Voltage of 2pin.
SP/OFF mode	V _{2L}	GND	—	0.3	V	SP/OFF mode. Hold Voltage of 2pin.
BASS-BOOST/ON mode	V _{4H}	VCC -0.7	—	VCC	V	SP/BassBoost mode. Hold Voltage of 4pin.
BASS-BOOST/OFF mode	V _{4L}	GND	—	0.7	V	SP/NonBoost mode. Hold Voltage of 4pin.
STEREO mode	V _{3H}	VCC -0.7	—	VCC	V	SP/STEREO mode. Hold Voltage of 3pin.
MONO mode	V _{3L}	GND	—	0.7	V	SP/MONO mode. Hold Voltage of 3pin.
ACTIVE mode	V _{10H}	VCC -0.7	—	VCC	V	HP/Active mode. Hold Voltage of 10pin.
MUTE mode	V _{10L}	GND	—	0.7	V	HP/MUTE mode. Hold Voltage of 10pin.
■PSRR						
Ripple rejection ratio	G _{PR}	—	-64	—	dBV	f=100Hz, 0.3Vpp, SIN Input SPOUT monitor, DIN-Audio

○Outer dimensions

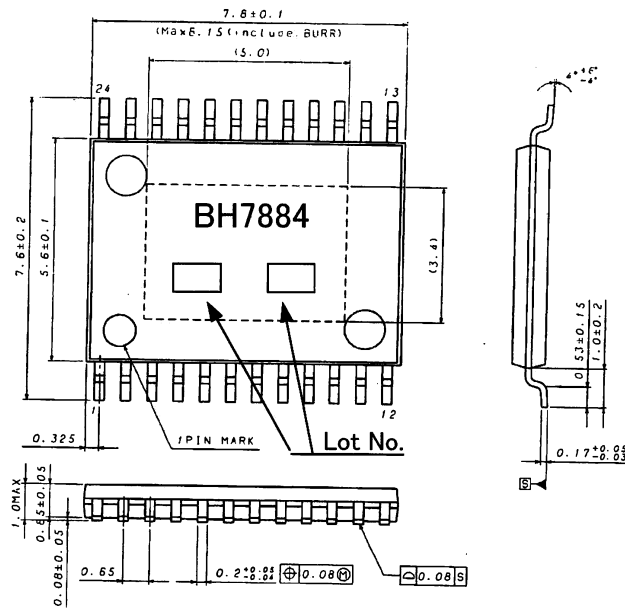


HTSSOP-B24 (Unit:mm)

Rev.B

○Block diagram

○Pin number and pin name

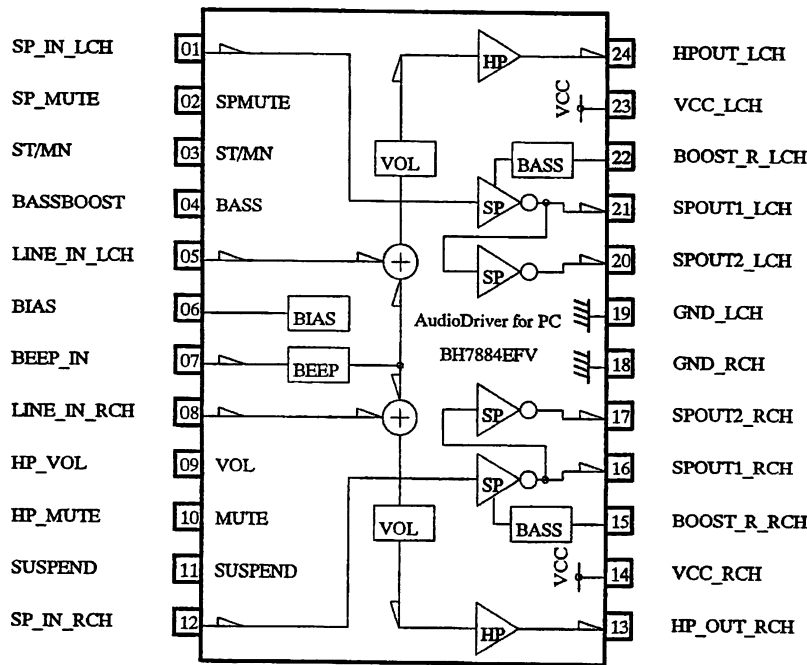

Pin No.	Pin name
1	SP_IN_LCH
2	SP_MUTE
3	ST/MN
4	BASSBOOST
5	LINE_IN_LCH
6	BIAS
7	BEEP_IN
8	LINE_IN_RCH
9	HP_VOL
10	HP_MUTE
11	SUSPEND
12	SP_IN_RCH
13	HPOUT_RCH
14	VCC_RCH
15	BOOST_R_RCH
16	SPOUT1_RCH
17	SPOUT2_RCH
18	GND_RCH
19	GND_LCH
20	SPOUT2_LCH
21	SPOUT1_LCH
22	BOOST_R_LCH
23	VCC_LCH
24	HPOUT_LCH

○Cautions on use

1) Absolute maximum ratings

If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you think of a case in which absolute maximum ratings are exceeded, enforce fuses or other physical safety measures and investigate how not to apply the conditions under which absolute maximum ratings are exceeded to the LSI.

2) GND potential

Make the GND pin voltage such that it is the lowest voltage even when operating below it. Actually confirm that the voltage of each pin does not become a lower voltage than the GND pin, including transient phenomena.

3) Thermal design

Perform thermal design in which there are adequate margins by taking into account the allowable power dissipation in actual states of use.

4) Shorts between pins and miss-installation

When mounting the LSI on a board, pay adequate attention to orientation and placement discrepancies of the LSI. If it is miss-installed and the power is turned on, the LSI may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the LSI or between a pin and a power supply or a pin and a GND.

5) Operation in strong magnetic fields

Adequately evaluate use in a strong magnetic field, since there is a possibility of malfunction.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available,
please contact your nearest sales office.

Please contact our sales offices for details ;

U.S.A / San Diego	TEL : +1(858)625-3630	FAX : +1(858)625-3670
Atlanta	TEL : +1(770)754-5972	FAX : +1(770)754-0691
Dallas	TEL : +1(972)312-8818	FAX : +1(972)312-0330
Germany / Dusseldorf	TEL : +49(2154)9210	FAX : +49(2154)921400
United Kingdom / London	TEL : +44(1)908-282-666	FAX : +44(1)908-282-528
France / Paris	TEL : +33(0)1 56 97 30 60	FAX : +33(0) 1 56 97 30 80
China / Hong Kong	TEL : +852(2)740-6262	FAX : +852(2)375-8971
Shanghai	TEL : +86(21)6279-2727	FAX : +86(21)6247-2066
Dilian	TEL : +86(411)8230-8549	FAX : +86(411)8230-8537
Beijing	TEL : +86(10)8525-2483	FAX : +86(10)8525-2489
Taiwan / Taipei	TEL : +866(2)2500-6956	FAX : +866(2)2503-2869
Korea / Seoul	TEL : +82(2)8182-700	FAX : +82(2)8182-715
Singapore	TEL : +65-6332-2322	FAX : +65-6332-5662
Malaysia / Kuala Lumpur	TEL : +60(3)7958-8355	FAX : +60(3)7958-8377
Philippines / Manila	TEL : +63(2)807-6872	FAX : +63(2)809-1422
Thailand / Bangkok	TEL : +66(2)254-4890	FAX : +66(2)256-6334

Japan /
(Internal Sales)

Tokyo	2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082	TEL : +81(3)5203-0321	FAX : +81(3)5203-0300
Yokohama	2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575	TEL : +81(45)476-2131	FAX : +81(45)476-2128
Nagoya	Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002	TEL : +81(52)581-8521	FAX : +81(52)561-2173
Kyoto	579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216	TEL : +81(75)311-2121	FAX : +81(75)314-6559

(Contact address for overseas customers in Japan)

Yokohama	TEL : +81(45)476-9270	FAX : +81(045)476-9271
----------	-----------------------	------------------------