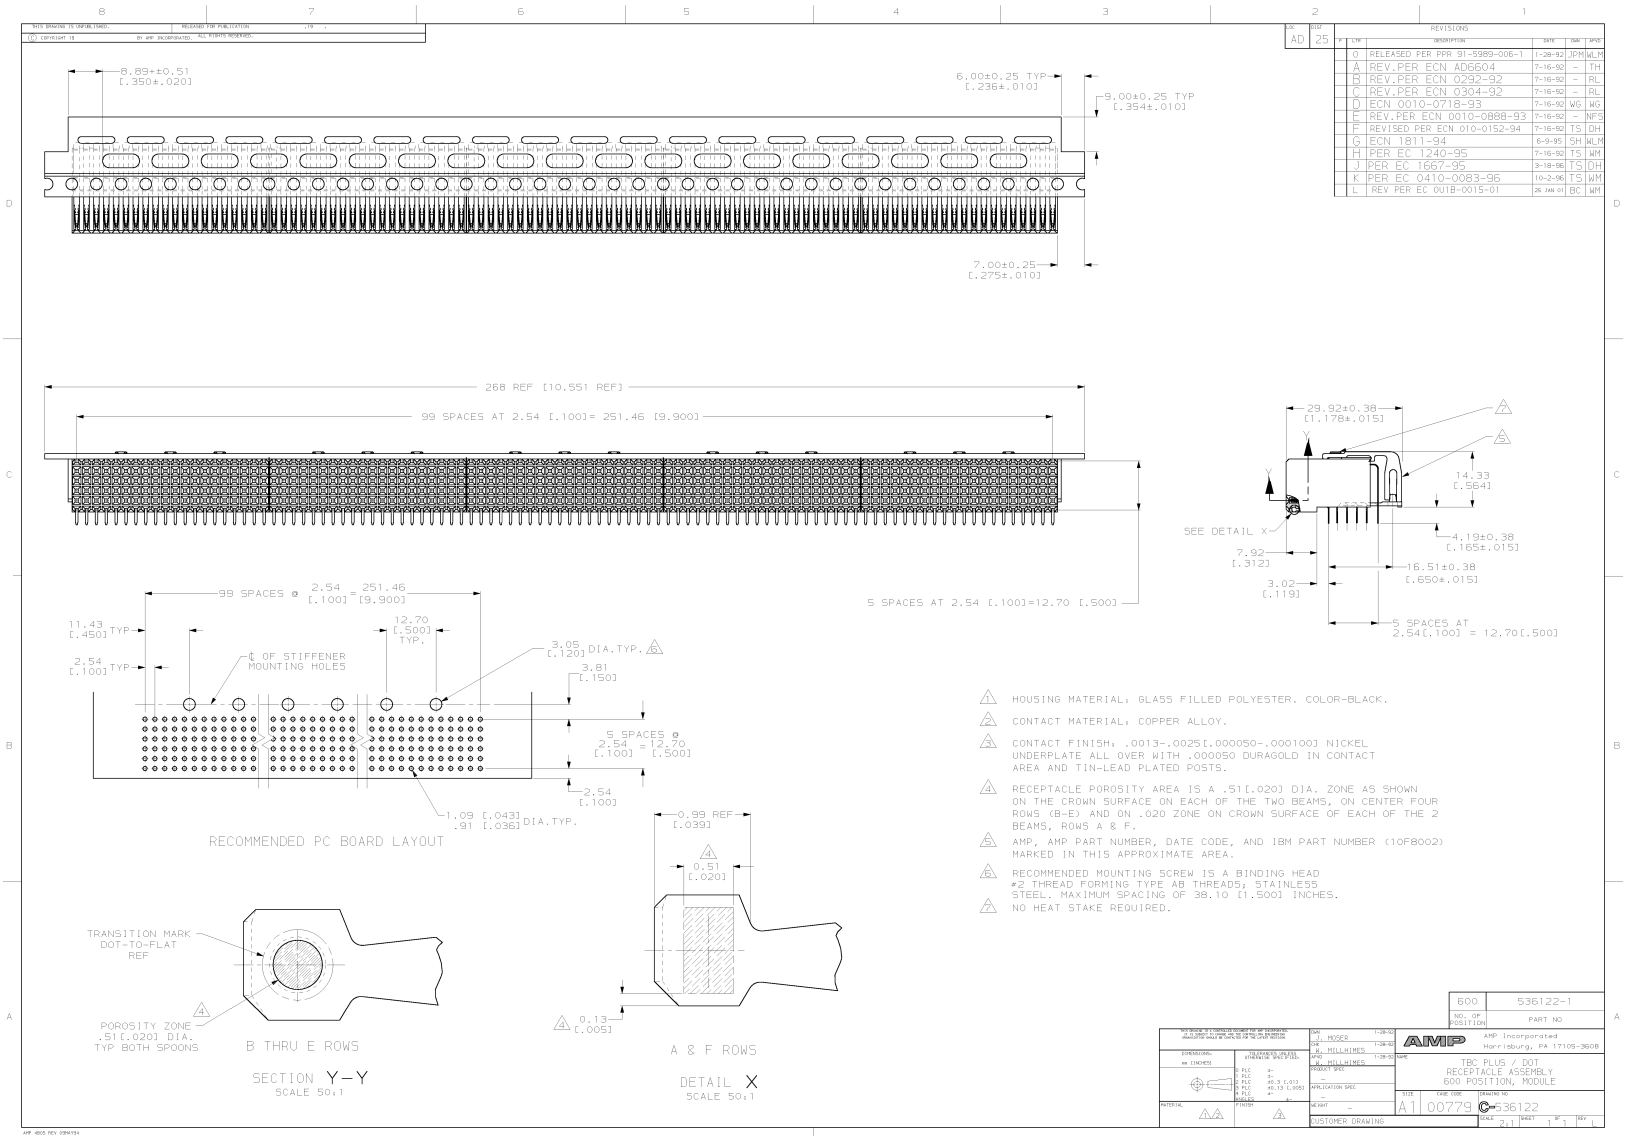

LTR	DESCRIPTION	DATE	DWN	APVD
0	RELEASED PER PPR 91-5989-006-1	1-28-92	JPM	WLM
A	REV.PER ECN AD6604	7-16-92	-	TH
B	REV.PER ECN 0292-92	7-16-92	-	RL
C	REV.PER ECN 0304-92	7-16-92	-	RL
D	ECN 0010-0718-93	7-16-92	WG	WG
E	REV.PER ECN 0010-0888-93	7-16-92	-	NFS
F	REVISED PER ECN 010-0152-94	7-16-92	TS	DH
G	ECN 1811-94	6-9-95	SH	WLM
H	PER EC 1240-95	7-16-92	TS	WM
J	PER EC 1667-95	3-18-96	TS	DH
K	PER EC 0410-0083-96	10-2-96	TS	WM
L	REV PER EC 0U1B-0015-01	26 JAN 01	BC	WM

1. HOUSING MATERIAL: GLASS FILLED POLYESTER. COLOR-BLACK.
2. CONTACT MATERIAL: COPPER ALLOY.
3. CONTACT FINISH: .0013-.0025[.000050-.000100] NICKEL UNDERPLATE ALL OVER WITH .000050 DURAGOLD IN CONTACT AREA AND TIN-LEAD PLATED POSTS.
4. RECEPTACLE POROSITY AREA IS A .51[.020] DIA. ZONE AS SHOWN ON THE CROWN SURFACE ON EACH OF THE TWO BEAMS, ON CENTER FOUR ROWS (B-E) AND ON .020 ZONE ON CROWN SURFACE OF EACH OF THE 2 BEAMS, ROWS A & F.
5. AMP, AMP PART NUMBER, DATE CODE, AND IBM PART NUMBER (10F8002) MARKED IN THIS APPROXIMATE AREA.
6. RECOMMENDED MOUNTING SCREW IS A BINDING HEAD #2 THREAD FORMING TYPE AB THREADS; STAINLESS STEEL. MAXIMUM SPACING OF 38.10 [1.500] INCHES.
7. NO HEAT STAKE REQUIRED.

NO. OF POSITION	PART NO
600	536122-1

AMP Incorporated
Harrisburg, PA 17105-3608

TBC PLUS / DOT
RECEPTACLE ASSEMBLY
600 POSITION, MODULE

DWN: J. MOSER 1-28-92
CHK: W. MILLHIMES 1-28-92
APVD: W. MILLHIMES 1-28-92
PRODUCT SPEC: -
APPLICATION SPEC: -
WEIGHT: -
CUSTOMER DRAWING

SIZE: A1 CAGE CODE: 00779 DRAWING NO: C-536122
SCALE: 2:1 SHEET 1 OF 1 REV L

Downloaded from Elcodis.com electronic components distributor