

# **DATA SHEET**

## **BGD502; BGD504** CATV power doubler amplifier modules

Product specification  
Supersedes data of February 1994  
File under Discrete Semiconductors, SC16

1995 Oct 25

**Philips**  
Semiconductors



**PHILIPS**

**CATV power doubler amplifier modules****BGD502; BGD504****FEATURES**

- Excellent linearity
- Extremely low noise
- Silicon nitride passivation
- Rugged construction
- TiPtAu metallized crystals ensure optimal reliability.

**DESCRIPTION**

Hybrid amplifier modules for CATV systems operating over a frequency range of 40 to 550 MHz at a voltage supply of 24 V (DC).

**PINNING - SOT115C**

PIN	DESCRIPTION
1	input
2	common
3	common
5	+V <sub>B</sub>
7	common
8	common
9	output

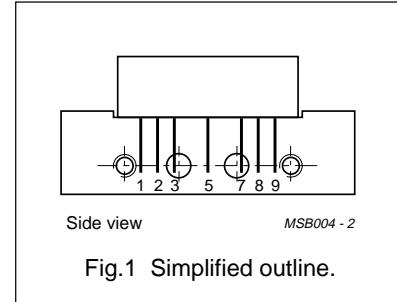


Fig.1 Simplified outline.

**QUICK REFERENCE DATA**

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$G_p$	power gain BGD502 BGD504	$f = 50 \text{ MHz}$	18	19	dB
			19.5	20.5	dB
$I_{\text{tot}}$	power gain BGD502 BGD504	$f = 550 \text{ MHz}$	18.8	20.8	dB
			20.2	22.2	dB
$I_{\text{tot}}$	total current consumption (DC)	$V_B = 24 \text{ V}$	–	435	mA

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
$V_i$	RF input voltage	–	60	dBmV
$T_{\text{stg}}$	storage temperature	–40	+100	°C
$T_{\text{mb}}$	operating mounting base temperature	–20	+100	°C

## CATV power doubler amplifier modules

BGD502; BGD504

**CHARACTERISTICS**Bandwidth 40 to 550 MHz;  $V_B = 24$  V;  $T_{mb} = 35$  °C;  $Z_S = Z_L = 75 \Omega$ .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$G_p$	power gain BGD502	$f = 50$ MHz	18	—	19	dB
	BGD504		19.5	—	20.5	dB
	power gain BGD502	$f = 550$ MHz	18.8	—	20.8	dB
	BGD504		20.2	—	22.2	dB
SL	slope cable equivalent	$f = 40$ to 550 MHz	0.2	—	2.2	dB
FL	flatness of frequency response	$f = 40$ to 550 MHz	—	—	±0.3	dB
$S_{11}$	input return losses	$f = 40$ to 80 MHz	20	—	—	dB
		$f = 80$ to 160 MHz	19	—	—	dB
		$f = 160$ to 550 MHz	18	—	—	dB
$S_{22}$	output return losses	$f = 40$ to 80 MHz	20	—	—	dB
		$f = 80$ to 160 MHz	19	—	—	dB
		$f = 160$ to 550 MHz	18	—	—	dB
$S_{21}$	phase response	$f = 50$ MHz	+135	—	+225	deg
CTB	composite triple beat BGD502	77 channels flat; $V_o = 44$ dBmV;	—	—	—65	dB
		measured at 547.25 MHz	—	—	—64	dB
$X_{mod}$	cross modulation BGD502	77 channels flat; $V_o = 44$ dBmV;	—	—	—68	dB
		measured at 55.25 MHz	—	—	—67	dB
CSO	composite second order distortion BGD502	77 channels flat; $V_o = 44$ dBmV;	—	—	—62	dB
		measured at 548.5 MHz	—	—	—60	dB
$d_2$	second order distortion BGD502	note 1	—	—	—72	dB
			—	—	—70	dB
$V_o$	output voltage BGD502	$d_{im} = -60$ dB; note 2	64	—	—	dBmV
			63.5	—	—	dBmV
F	noise figure	$f = 550$ MHz	—	—	8	dB
$I_{tot}$	total current consumption (DC)	note 3	—	415	435	mA

**Notes**

- $f_p = 55.25$  MHz;  $V_p = 44$  dBmV;  $f_q = 493.25$  MHz;  $V_q = 44$  dBmV; measured at  $f_p + f_q = 548.5$  MHz.
- Measured according to DIN45004B:  $f_p = 540.25$  MHz;  $V_p = V_o$ ;  $f_q = 547.25$  MHz;  $V_q = V_o - 6$  dB;  $f_r = 549.25$  MHz;  $V_r = V_o - 6$  dB; measured at  $f_p + f_q - f_r = 538.25$  MHz.
- The modules normally operate at  $V_B = 24$  V, but are able to withstand supply transients up to 30 V.

## CATV power doubler amplifier modules

BGD502; BGD504

**CHARACTERISTICS**Bandwidth 40 to 450 MHz;  $V_B = 24$  V;  $T_{mb} = 35$  °C;  $Z_S = Z_L = 75 \Omega$ .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$G_p$	power gain BGD502	$f = 50$ MHz	18	—	19	dB
	BGD504		19.5	—	20.5	dB
	power gain BGD502	$f = 450$ MHz	18.6	—	20.6	dB
	BGD504		20	—	22	dB
SL	slope cable equivalent BGD502	$f = 40$ to 450 MHz	0.2	—	1.8	dB
	BGD504		0	—	1.65	dB
FL	flatness of frequency response	$f = 40$ to 450 MHz	—	—	$\pm 0.3$	dB
$S_{11}$	input return losses	$f = 40$ to 80 MHz	20	—	—	dB
		$f = 80$ to 160 MHz	19	—	—	dB
		$f = 160$ to 450 MHz	18	—	—	dB
$S_{22}$	output return losses	$f = 40$ to 80 MHz	20	—	—	dB
		$f = 80$ to 160 MHz	19	—	—	dB
		$f = 160$ to 450 MHz	18	—	—	dB
$S_{21}$	phase response	$f = 50$ MHz	+135	—	+225	deg
CTB	composite triple beat BGD502	60 channels flat; $V_o = 46$ dBmV; measured at 445.25 MHz	—	—	-67	dB
			—	—	-66	dB
CSO	composite second order distortion BGD502	60 channels flat; $V_o = 46$ dBmV; measured at 548.5 MHz	—	—	t.b.f.	dB
			—	—	t.b.f.	dB
$X_{mod}$	cross modulation BGD502	60 channels flat; $V_o = 46$ dBmV; measured at 55.25 MHz	—	—	-67	dB
			—	—	-66	dB
$d_2$	second order distortion BGD502	note 1	—	—	-75	dB
			—	—	-73	dB
$V_o$	output voltage BGD502	$d_{im} = -60$ dB; note 2	67	—	—	dBmV
			66.5	—	—	dBmV
F	noise figure	$f = 450$ MHz	—	—	7	dB
$I_{tot}$	total current consumption (DC)	note 3	—	415	435	mA

**Notes**

- $f_p = 55.25$  MHz;  $V_p = 46$  dBmV;  $f_q = 391.25$  MHz;  $V_q = 46$  dBmV; measured at  $f_p + f_q = 446.5$  MHz.
- Measured according to DIN45004B:  $f_p = 440.25$  MHz;  $V_p = V_o$ ;  $f_q = 447.25$  MHz;  $V_q = V_o - 6$  dB;  $f_r = 449.25$  MHz;  $V_r = V_o - 6$  dB; measured at  $f_p + f_q - f_r = 438.25$  MHz.
- The modules normally operate at  $V_B = 24$  V, but are able to withstand supply transients up to 30 V.