
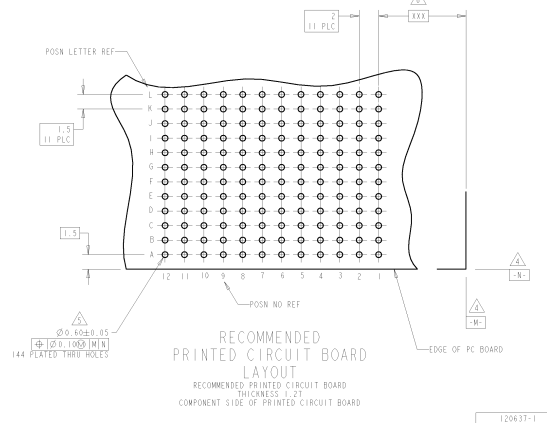
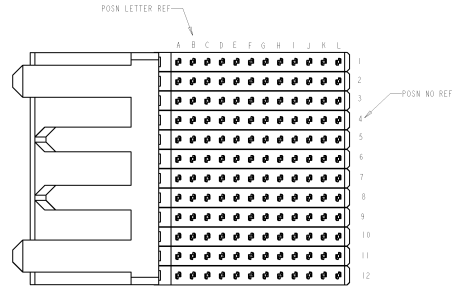

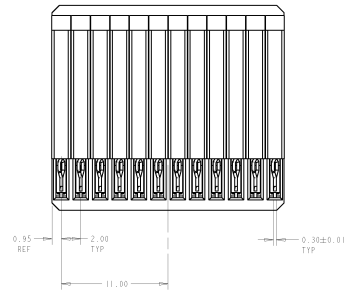
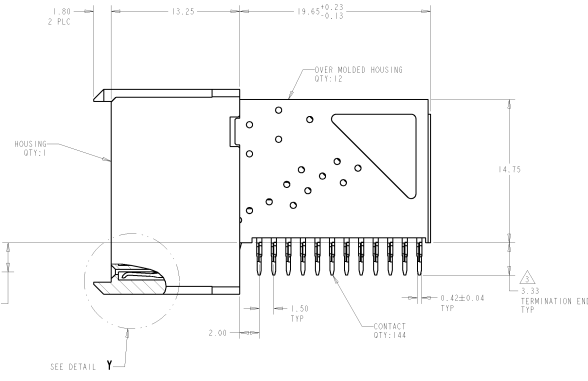


REV. 01	REVISED FOR FABRICATION
REV. 02	REVISED FOR FABRICATION

REVISIONS			
NO.	DATE	DESCRIPTION	BY
1	06/18/05	DEL PER 0018-04-00-001	MMW
2			
3			
4			

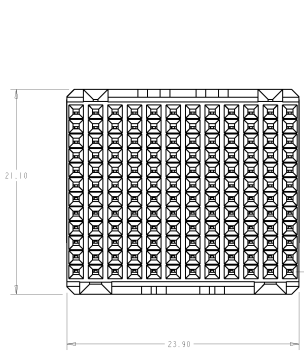

- ▲ GLASS FILLED POLYESTER, BLACK
- ▲ PHOSPHOR BRONZE
- ▲ 0.72µm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 0.72µm MIN TIN LEAD ON TERMINATION END, BOTH OVER 1.27µm MIN NICKEL.
- ▲ DATUMS ESTABLISHED BY CUSTOMER.
- ▲ DRILLED HOLE DIAMETER 0.304±0.025
COPPER THK 0.125-0.157
TIN LEAD THICKNESS 0.004-0.01
- ▲ DIMENSION ESTABLISHED BY CUSTOMER.

AMP RECEIPTABLE ASSEMBLY, 144 POSITION, 12 ROW, 2-PACK, HM	
TITLE: 00779 CASE NO: 120637 CUSTOMER: AMP	DATE: 27 JUL 92 BY: MSL DESIGNED BY: DEK0092 DRAWN BY: DEK0092 CHECKED BY: DEK0092 APPROVED BY: DEK0092