THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
FT	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	W	REVISED PER ECO-07-010240	9/3/07	SS	GS
	W1	REVISED PER ECO-09-020935	09SEP09	KK	AEG

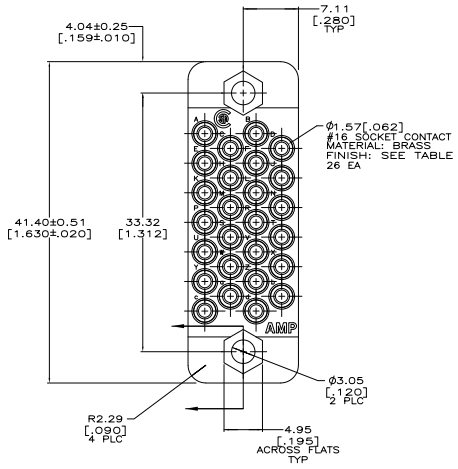

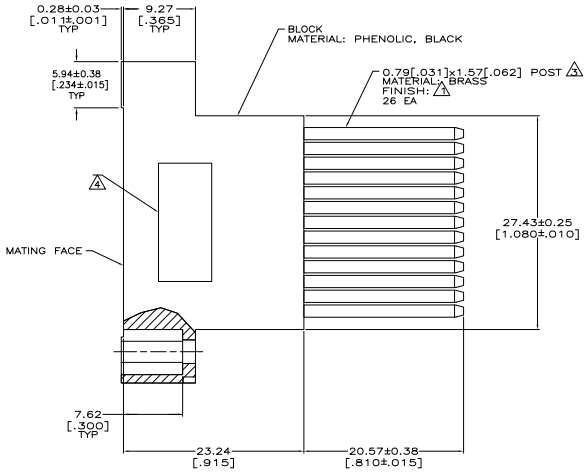

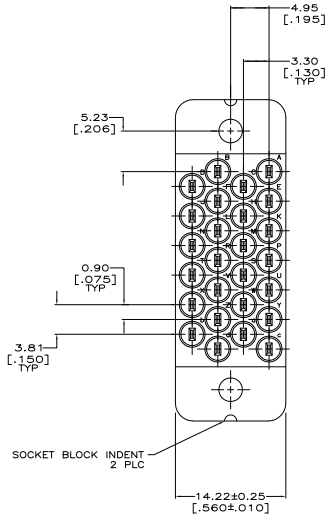

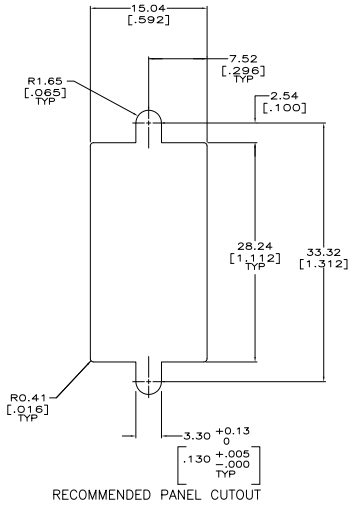

RECOMMENDED PANEL CUTOUT

1. 2.54um[.000100] MIN TIN-LEAD OVER 1.27um[.000050] MIN NICKEL.
2. 0.76um[.000030] MIN GOLD, INTERNALLY, FOR A DISTANCE OF 5.08[.200] MIN FROM MATING END, GOLD FLASH ON THE REMAINDER, ALL OVER 0.76um[.000030] MIN NICKEL.
3. POSTS ARE SEMI AUTOMATICALLY WIREABLE AND WILL ACCOMODATE 3 TERMINATIONS.
4. AMP, PART NUMBER, AND DATE CODE MARKED IN THIS AREA.
5. #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
6. 2.54um[.000100] MIN TIN OVER 1.27um[.000050] MIN NICKEL.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7 OBSOLETE	6	6-205511-2
	1	1-205511-3
	POST PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± .4
2 PLC ± 0.13 [.005]
3 PLC ± .-
4 PLC ± .-
ANGLES ± -
MATERIAL: SEE CALLOUTS
FINISH: SEE CALLOUTS

DWN	C.REIFSNYDER	13 FEB 98
CK	R.STONE	22 FEB 98
APVD	M.MCALONIS	22 FEB 98
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME: SOCKET ASSY, 26 POSITION, AUTOWIREABLE, STANDARD, M SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-205511	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV W1

Downloaded from Elcodis.com electronic components distributor