

FEATURES

- Single-supply operation: 4.5 V to 16.5 V
- Upper/lower buffers swing to V_{DD}/GND
- Continuous output current: 35 mA
- V_{COM} peak output current: 250 mA
- Offset voltage: 15 mV
- Slew rate: 6 V/ μ s
- Unity gain stable with large capacitive loads
- Supply current: 700 μ A per amplifier
- Drop-in replacement for EL5420

APPLICATIONS

- TFT LCD monitor panels
- TFT LCD notebook panels
- Communications equipment
- Portable instrumentation
- Electronic games

GENERAL DESCRIPTION

The ADD8704 is a single-supply quad operational amplifier that has been optimized for today's low cost TFT LCD notebook and monitor panels. Output channels A and D swing to the rail for use as end-point gamma references. Output channels B and C provide high continuous and peak current drive for use as V_{COM} or repair amplifiers; they can also be used as midpoint gamma references. All four amplifiers have excellent transient response and have high slew rate and capacitive load drive capability. The ADD8704 is specified over the -40°C to $+85^{\circ}\text{C}$ temperature range and is available in either a 14-lead TSSOP or a 16-lead LFCSP package for thin, portable applications.

Table 1. Input/Output Characteristics

| Channel | V_{IH} | V_{IL} | I_O (mA) | I_{SC} (mA) |
|---------|-------------------------|----------------------|------------|---------------|
| A | $V_{DD} - 1.7\text{ V}$ | GND | 15 | 150 |
| B | $V_{DD} - 1.7\text{ V}$ | GND | 35 | 250 |
| C | V_{DD} | GND | 35 | 250 |
| D | V_{DD} | $GND + 1.7\text{ V}$ | 15 | 150 |

PIN CONFIGURATIONS

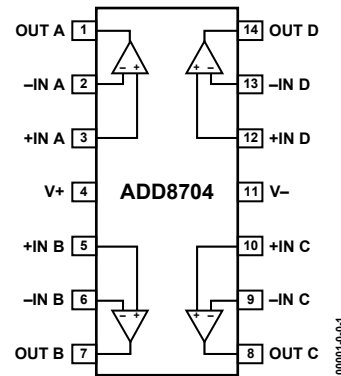


Figure 1. 14-Lead TSSOP (RU Suffix)




Figure 2. 16-Lead CSP (CP Suffix)

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|---|----|--------------------------|----|
| Electrical Characteristics | 3 | Input | 12 |
| Absolute Maximum Ratings..... | 5 | Output..... | 12 |
| Typical Performance Characteristics | 6 | Important Note..... | 12 |
| Application Information..... | 12 | Outline Dimensions | 14 |
| Theory..... | 12 | Ordering Guide | 14 |

REVISION HISTORY

Revision 0: Initial Version

ELECTRICAL CHARACTERISTICS

Table 2. $V_S = 16\text{ V}$, $V_{CM} = V_S/2$, $T_A @ 25^\circ\text{C}$, unless otherwise noted

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---|--------------------------|--|-------|--------|------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | | | 2 | 15 | mV |
| Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 10 | | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 200 | 1100 | nA |
| Input Offset Current | I_{OS} | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 10 | 100 | nA |
| Common-Mode Rejection Ratio | CMRR | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | | 250 | nA |
| Amp A | | $V_{CM} = 0$ to $(V_S - 1.7\text{ V})$ | 54 | 95 | | dB |
| Amp B | | $V_{CM} = 0$ to $(V_S - 1.7\text{ V})$ | 54 | 95 | | dB |
| Amp C | | $V_{CM} = 0$ to V_S | 54 | 95 | | dB |
| Amp D | | $V_{CM} = 1.7\text{ V}$ to V_S | 54 | 95 | | dB |
| Large Signal Voltage Gain | AVO | $R_L = 10\text{ k}\Omega$, $V_O = 0.5$ to $(V_S - 0.5\text{ V})$ | 1 | 10 | | V/mV |
| Input Impedance | Z_{IN} | | | 400 | | k Ω |
| Input Capacitance | C_{IN} | | | 1 | | pF |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage High (A) Optimized for Low Swing | V_{OH} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 15.985 | | V |
| Output Voltage High (B) Optimized for V_{COM} | V_{OH} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.6 | 15.75 | | V |
| Output Voltage High (C) Optimized for Midrange | V_{OH} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.5 | | | V |
| Output Voltage High (D) Optimized for High Swing | V_{OH} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.75 | 15.995 | | V |
| Output Voltage Low (A) Optimized for Low Swing | V_{OL} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 15.9 | | V |
| Output Voltage Low (B) Optimized for V_{COM} | V_{OL} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.8 | 15.9 | | V |
| Output Voltage Low (C) Optimized for Midrange | V_{OL} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.75 | | | V |
| Output Voltage Low (D) Optimized for High Swing | V_{OL} | $I_L = 100\ \mu\text{A}$ $I_L = 5\text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 15.8 | 15.9 | | V |
| Continuous Output Current (A and D) | I_{OUT} | | | 15 | | mA |
| Continuous Output Current (B and C) | I_{OUT} | | | 35 | | mA |
| Peak Output Current (A and D) | I_{PK} | $V_S = 16\text{ V}$ | | 50 | | mA |
| Peak Output Current (B and C) | I_{PK} | $V_S = 16\text{ V}$ | | 200 | | mA |
| SUPPLY CHARACTERISTICS | | | | | | |
| Supply Voltage | V_S | | 4.5 | | 16 | V |
| Power Supply Rejection Ratio | PSRR | $V_S = 4\text{ V}$ to 17 V , $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | 70 | 90 | | dB |
| Total Supply Current | I_{SY} | $V_O = V_S/2$, No Load $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | 2.8 | 3.4 | mA |
| | | | | | 4 | mA |

ELECTRICAL CHARACTERISTICS (CONTINUED)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|-------------------------------------|------------|--|-----|-----|-----|------------------------|
| DYNAMIC PERFORMANCE | | | | | | |
| Slew Rate | SR | $R_L = 2\text{ k}\Omega$, $C_L = 200\text{ pF}$ | 4 | 6 | | V/ μ s |
| Gain Bandwidth Product | GBP | $R_L = 10\text{ k}\Omega$, $C_L = 40\text{ pF}$ | | 5.8 | | MHz |
| -3 dB Bandwidth | BW | $R_L = 10\text{ k}\Omega$, $C_L = 40\text{ pF}$ | | 6.8 | | MHz |
| Phase Margin | $\angle o$ | $R_L = 10\text{ k}\Omega$, $C_L = 40\text{ pF}$ | | 55 | | Degrees |
| Channel Separation | | | | 75 | | dB |
| NOISE PERFORMANCE | | | | | | |
| Voltage Noise Density (A, B, and C) | e_n | $f = 1\text{ kHz}$ | | 26 | | nV/ $\sqrt{\text{Hz}}$ |
| | e_n | $f = 10\text{ kHz}$ | | 25 | | nV/ $\sqrt{\text{Hz}}$ |
| Voltage Noise Density (D) | e_n | $f = 1\text{ kHz}$ | | 36 | | nV/ $\sqrt{\text{Hz}}$ |
| | e_n | $f = 10\text{ kHz}$ | | 35 | | nV/ $\sqrt{\text{Hz}}$ |
| Current Noise Density | i_n | $f = 10\text{ kHz}$ | | 0.8 | | pA/ $\sqrt{\text{Hz}}$ |

ABSOLUTE MAXIMUM RATINGS

Table 3. ADD8704 Stress Ratings¹

| Parameter | Rating |
|-----------------------------|-------------------------|
| Supply Voltage (V_s) | 18 V |
| Input Voltage | -0.5 V to $V_s + 0.5$ V |
| Differential Input Voltage | V_s |
| Storage Temperature Range | -65°C to +150°C |
| Operating Temperature Range | -40°C to +85°C |
| Junction Temperature Range | -65°C to +150°C |
| Lead Temperature Range | 300°C |
| ESD Tolerance (HBM) | ± 1500 V |
| ESD Tolerance (MM) | 175 V |

Table 4. Package Characteristics

| Package Type | θ_{JA} ² | θ_{JC} | Unit |
|--------------------|----------------------------|-----------------|------|
| 14-Lead TSSOP (RU) | 180 | 35 | °C/W |
| 16-Lead LFCSP (CP) | 38 ³ | 30 ³ | °C/W |

¹ Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

² θ_{JA} is specified for worst-case conditions, i.e., θ_{JA} is specified for devices soldered onto a circuit board for surface-mount packages.

³ DAP is soldered down to PCB.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this part features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



TYPICAL PERFORMANCE CHARACTERISTICS

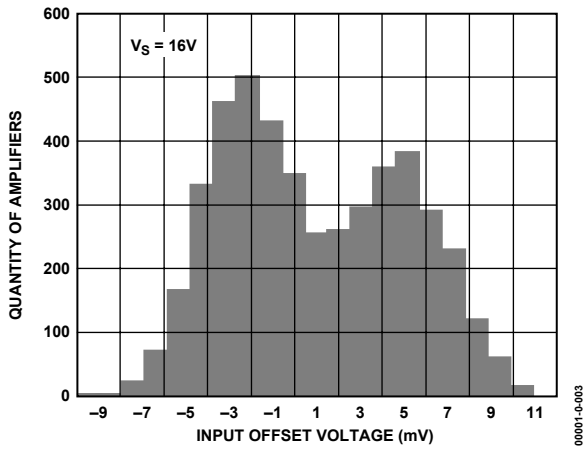


Figure 3. Input Offset Voltage, $V_S = 16V$

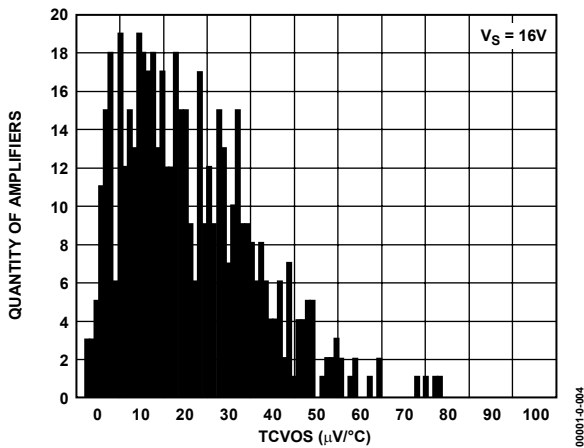


Figure 4. Input Offset Voltage Drift, $V_S = 16V$

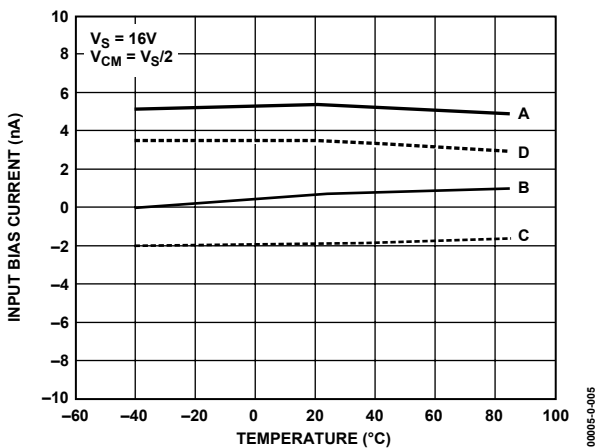


Figure 5. Input Bias Current vs. Temperature

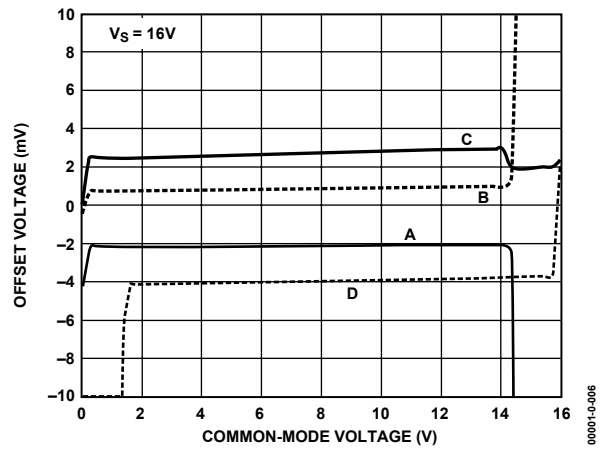


Figure 6. Offset Voltage vs. Common-Mode Voltage

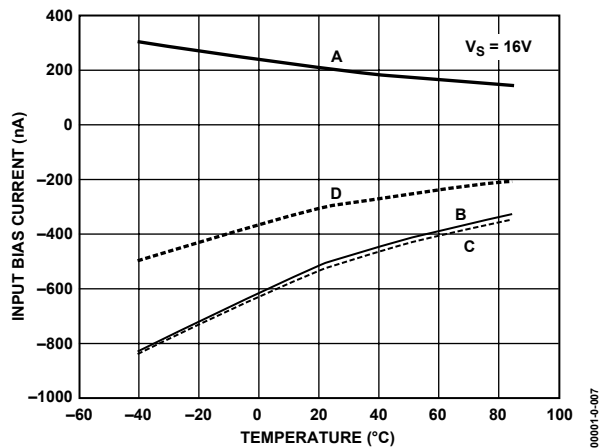


Figure 7. Input Bias Current vs. Temperature

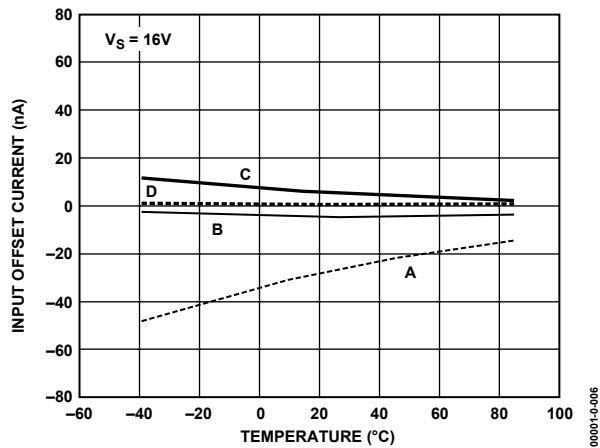


Figure 8. Input Offset Current vs. Temperature

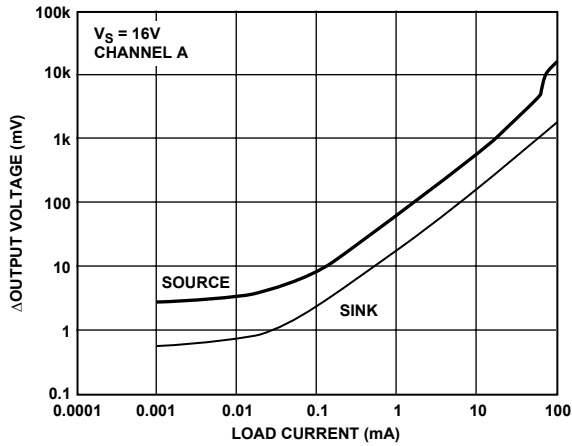


Figure 9. Channel A Output Voltage vs. Load Current

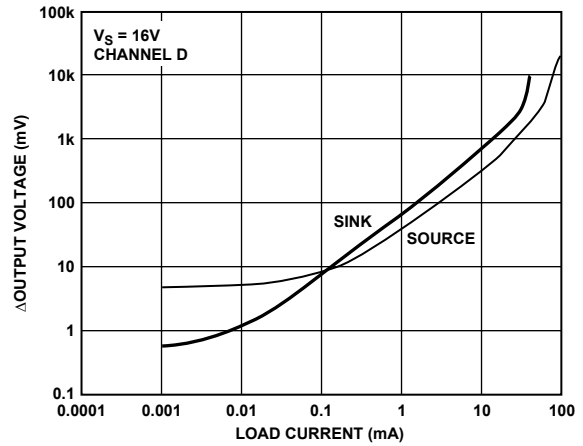


Figure 12. Channel D Output Voltage vs. Load Current

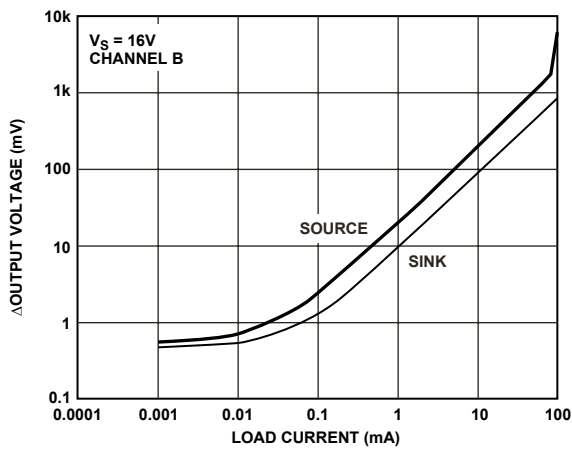


Figure 10. Channel B Output Voltage vs. Load Current

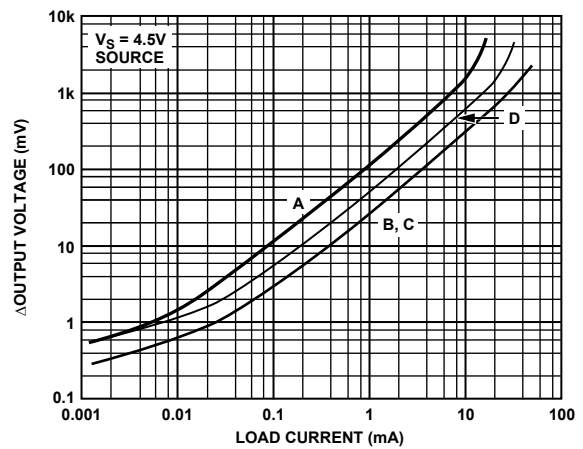


Figure 13. Output Source Voltage vs. Load Current, All Channels

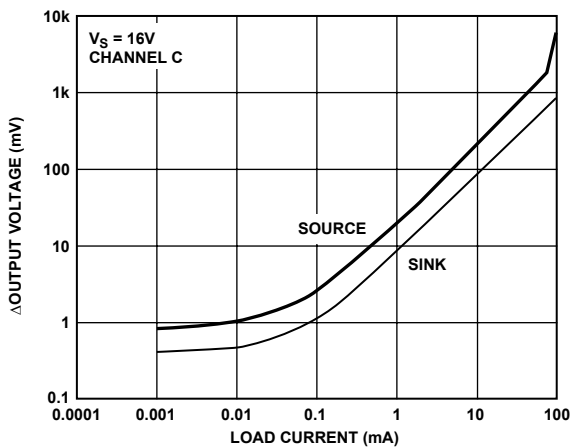


Figure 11. Channel C Output Voltage vs. Load Current

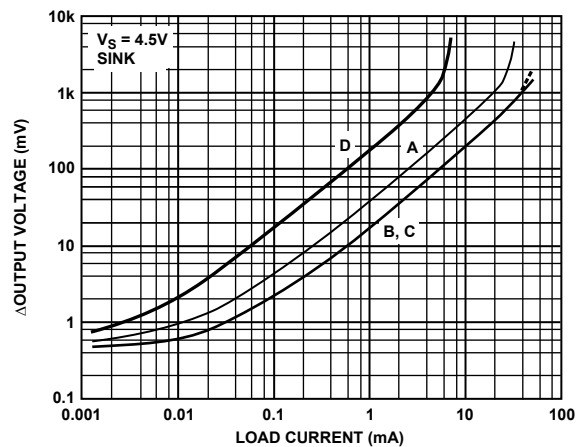


Figure 14. Output Sink Voltage vs. Load Current, All Channels

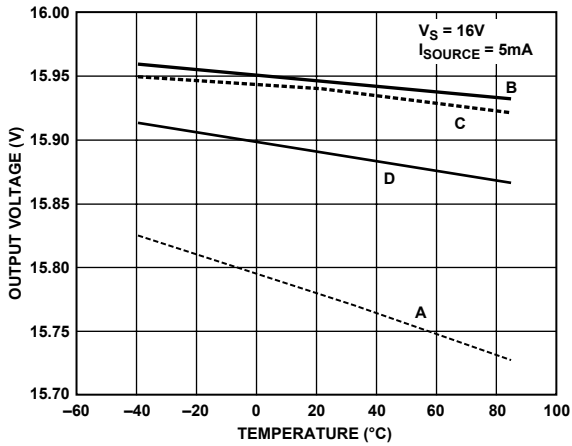


Figure 15. Output Source Voltage vs. Temperature

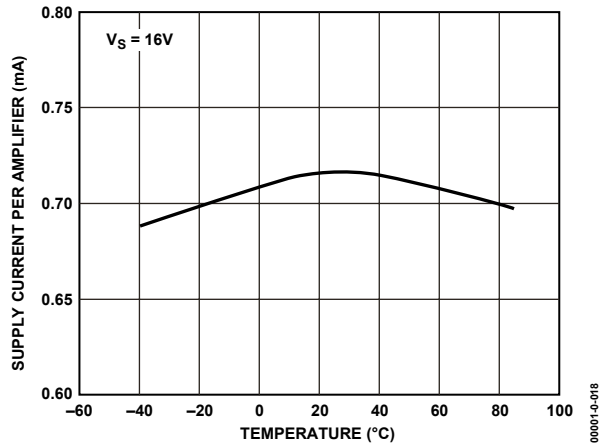


Figure 18. Supply Current vs. Temperature

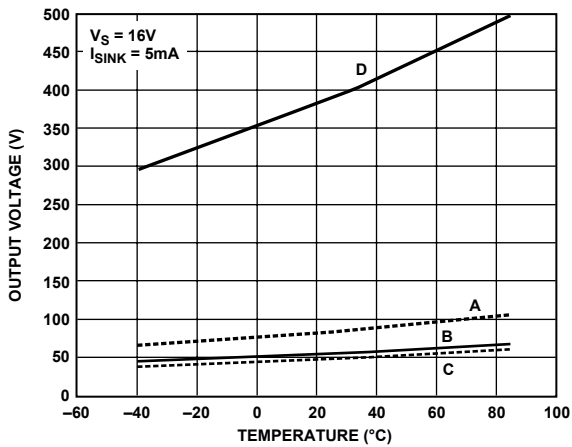


Figure 16. Output Sink Voltage vs. Temperature

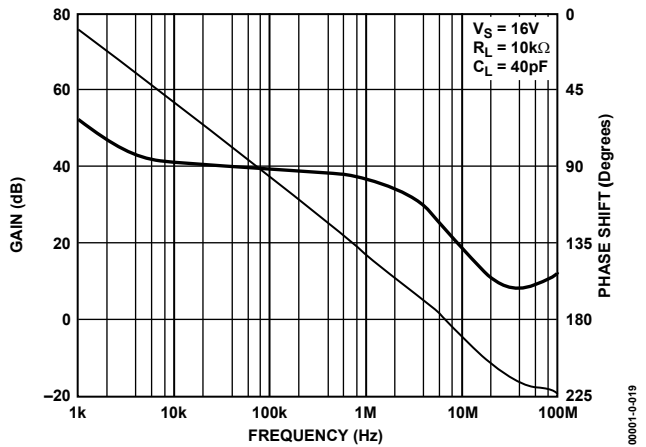


Figure 19. Frequency vs. Gain and Shift

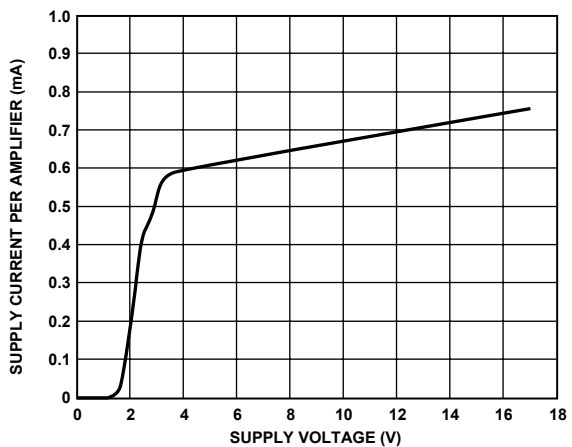


Figure 17. Supply Current vs. Supply Voltage

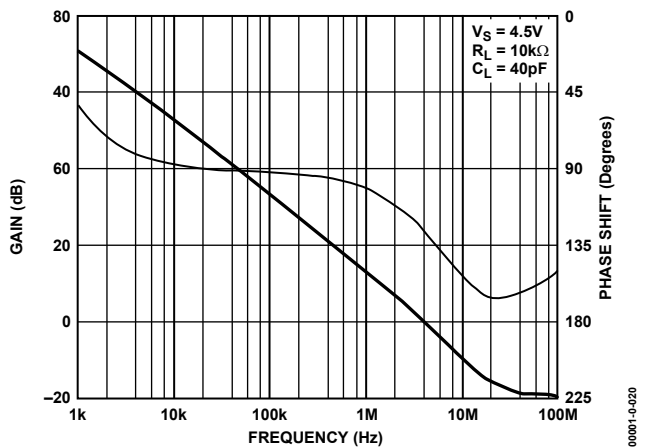


Figure 20. Frequency vs. Gain and Shift

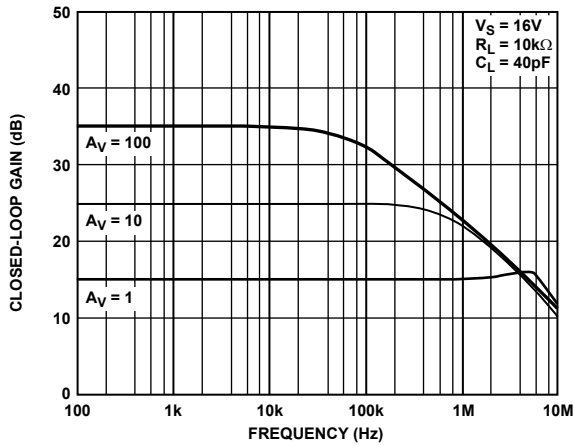


Figure 21. Closed-Loop Gain vs. Frequency

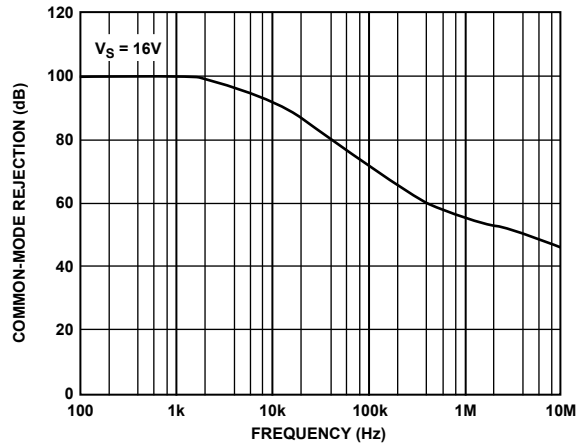


Figure 24. Common-Mode Rejection vs. Frequency

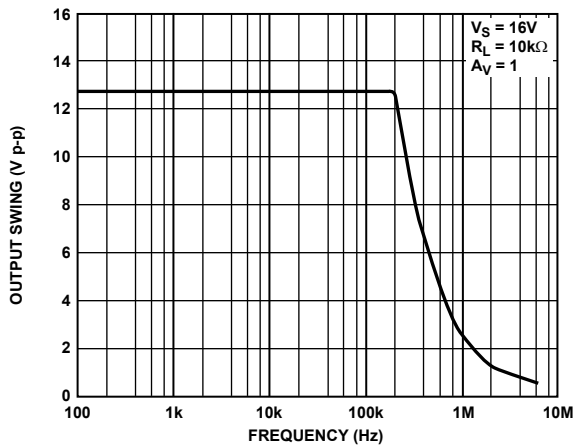


Figure 22. Output Swing vs. Frequency

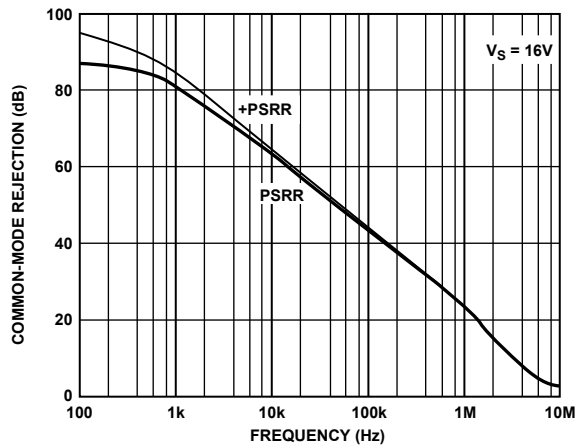


Figure 25. Common-Mode Rejection vs. Frequency

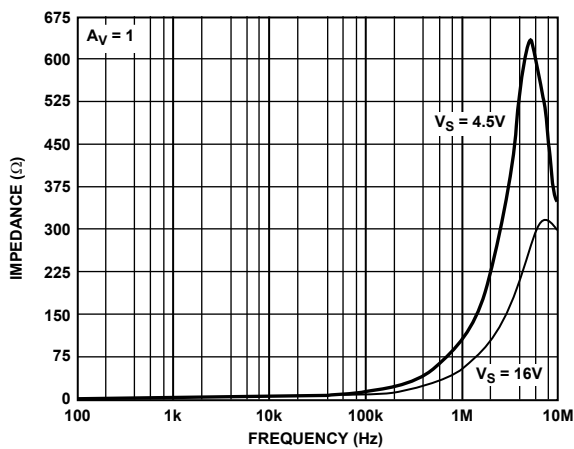


Figure 23. Impedance vs. Frequency

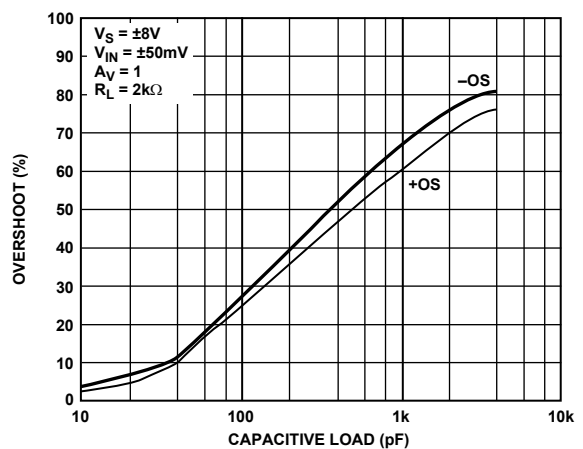


Figure 26. Overshoot vs. Capacitive Load

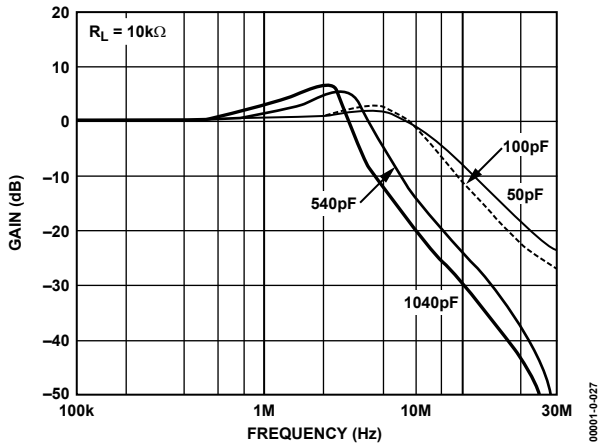


Figure 27. Gain vs. Capacitive Load

00001-0-027

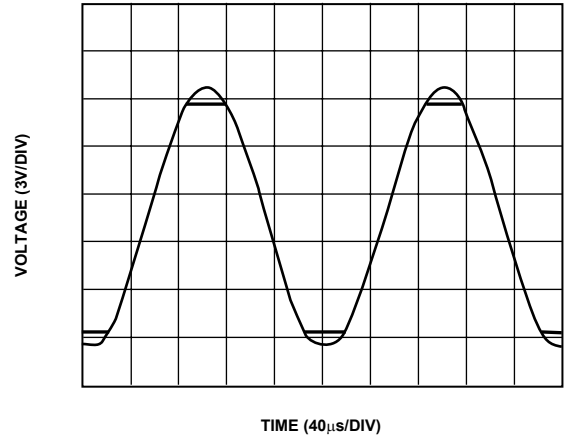


Figure 30. No Phase Reversal

00001-0-030

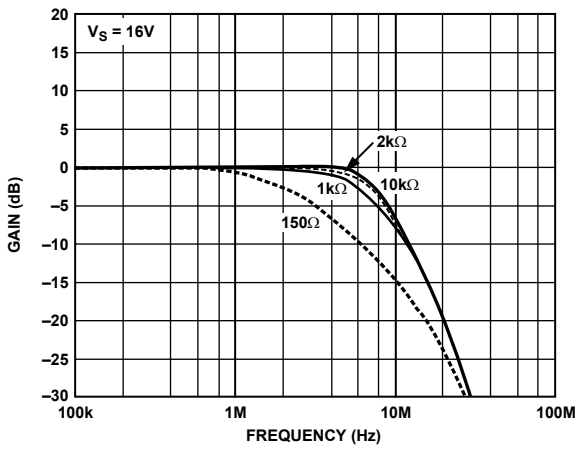


Figure 28. Gain vs. Resistive Load

00001-0-028

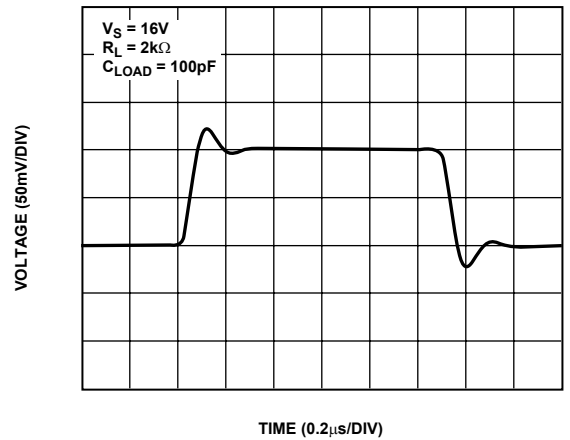


Figure 31. Small-Signal Transient Response

00001-0-031

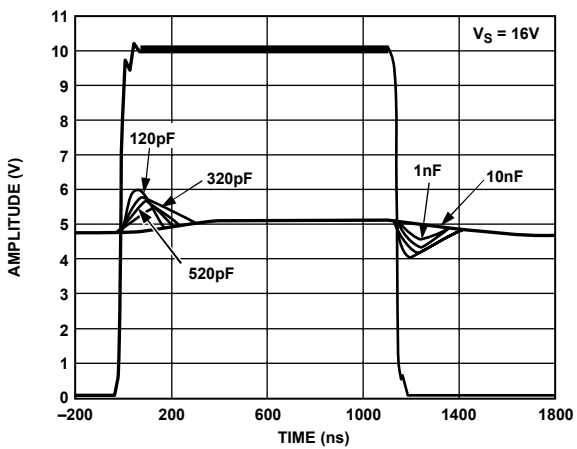


Figure 29. Transient Load Response

00001-0-029

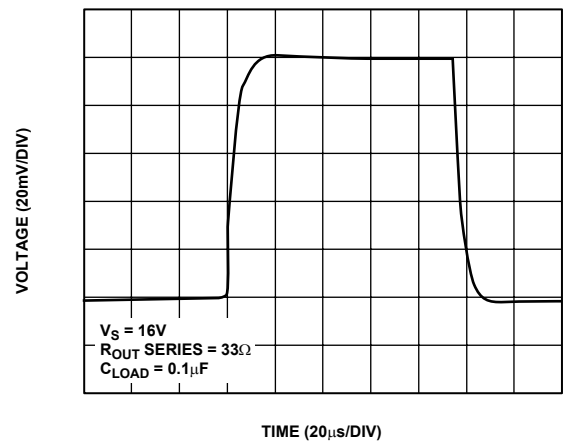


Figure 32. Small-Signal Transient Response

00001-0-032

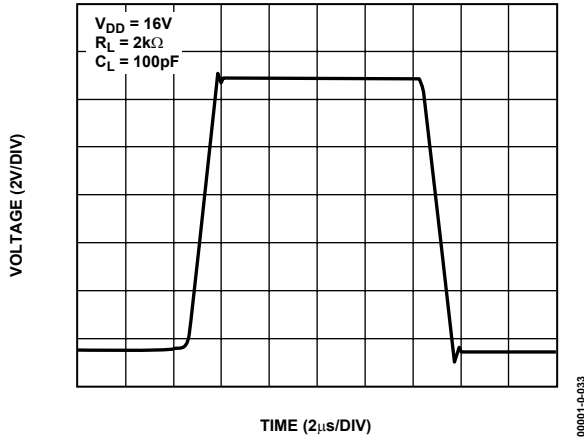


Figure 33. Large Signal Transient Response

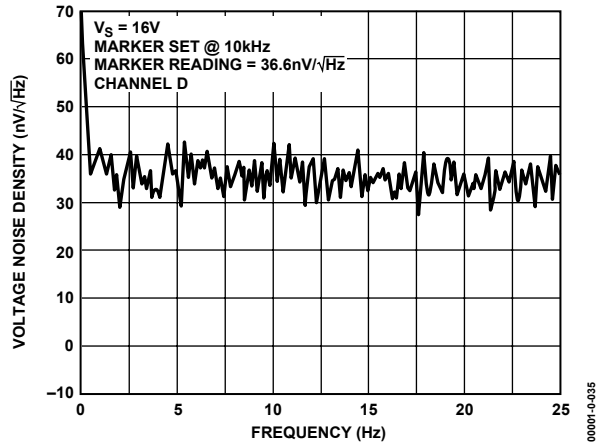


Figure 35. Voltage Noise Density vs. Frequency

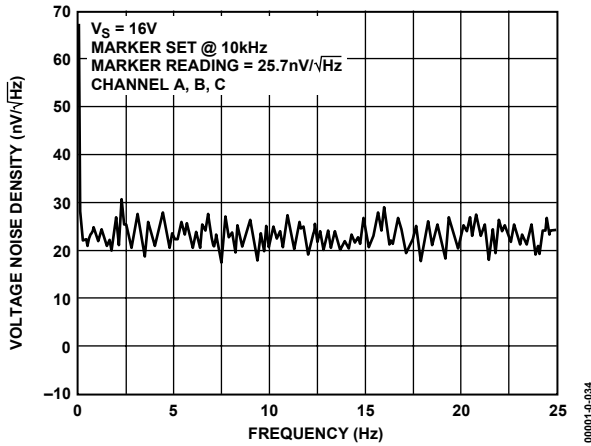


Figure 34. Voltage Noise Density vs. Frequency

APPLICATION INFORMATION

THEORY

The ADD8704 is designed for use in LCD gamma correction circuits. Depending on the panel architecture, between 4 and 18 different gamma voltages may be needed. These gamma voltages provide the reference voltages for the column driver RDACs. Due to the capacitive nature of LCD panels, it is necessary for these drivers to provide high capacitive load drive.

In addition to providing gamma reference voltages, these parts are also capable of providing the V_{COM} voltage. V_{COM} is the center voltage common to all the LCD pixels. Since the V_{COM} circuit is common to all the pixels in the panel, the V_{COM} driver is designed to supply continuous currents up to 35 mA.

INPUT

The ADD8704 has four amplifiers specifically designed for the needs of an LCD panel. Figure 36 shows a typical gamma correction curve for a normally white twisted nematic LCD panel. The symmetric curve comes from the need to reverse the polarity on the LC pixels to avoid “burning” in the image. The application therefore requires gamma voltages that come close to both supply rails. To accommodate this transfer function, the ADD8704 has been designed to have four different amplifiers in one package.

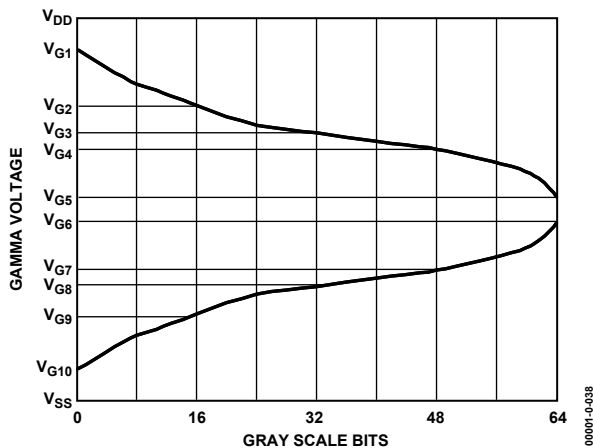


Figure 36. LCD Gamma Correction Curve

Amplifier A has a single-supply PNP input stage followed by a folded cascode stage. This provides an input range that goes to the bottom rail. This amplifier can therefore be used to provide the bottom voltage on the RDAC string.

Amplifier B (PNP folded cascode) swings to the low rail as well, but it provides 35 mA continuous output current versus 15 mA. This buffer is suitable for lower RDAC range, middle RDAC range, or V_{COM} applications.

Amplifier C is a rail-to-rail input range that makes the ADD8704 suitable for use anywhere on the RDAC as well as for V_{COM} applications.

Amplifier D has an NPN follower input stage. This covers the upper rail to GND plus 1.7 V. This amplifier is suitable for the upper range of the RDAC.

OUTPUT

The outputs of the amplifiers have been designed to match the performance needs of the gamma correction circuit. All four of the amplifiers have rail-to-rail outputs, but the current drive capabilities differ. Since amplifier A is suited for voltages close to V_{SS} (GND), the output is designed to sink more current than it sources; it can sink 15 mA of continuous current. Likewise, since amplifier D is primarily used for voltages close to V_{DD} , it sources more current. Amplifier D can source 15 mA of continuous current. Amplifiers B and C are designed for use as either midrange gamma or V_{COM} amplifiers. They therefore sink and source equal amounts of current. Since they are used as V_{COM} amplifiers, they have a drive capability of up to 35 mA of continuous current.

The nature of LCD panels introduces a large amount of parasitic capacitance from the column drivers as well as the capacitance associated with the liquid crystals via the common plane. This makes capacitive drive capability an important factor when designing the gamma correction circuit.

IMPORTANT NOTE

Because of the asymmetric nature of amplifiers A and D, care must be taken to connect an input that forces the amplifiers to operate in their most productive output states. Amplifier D has very limited sink capabilities, while amplifier A does not source well. If more than one ADD8704 is used, set the amplifier D input to enable the amplifier output to source current and set the amplifier A input to force a sinking output current. This means making sure the input is above the midpoint of the common-mode input range for amplifier D and below the midpoint for amplifier A. Mathematically speaking, make sure $V_{IN} > V_S/2$ for amplifier D and $V_{IN} < V_S/2$ for amplifier A.

Figure 37 shows an example using 4 ADD8704s to generate 10 gamma outputs. Note that the top three resistor tap-points are connected to the amplifier D inputs, thus assuring these channels will source current. Likewise, the bottom three resistor tap-points are connected to the amplifier A inputs to provide sinking output currents.

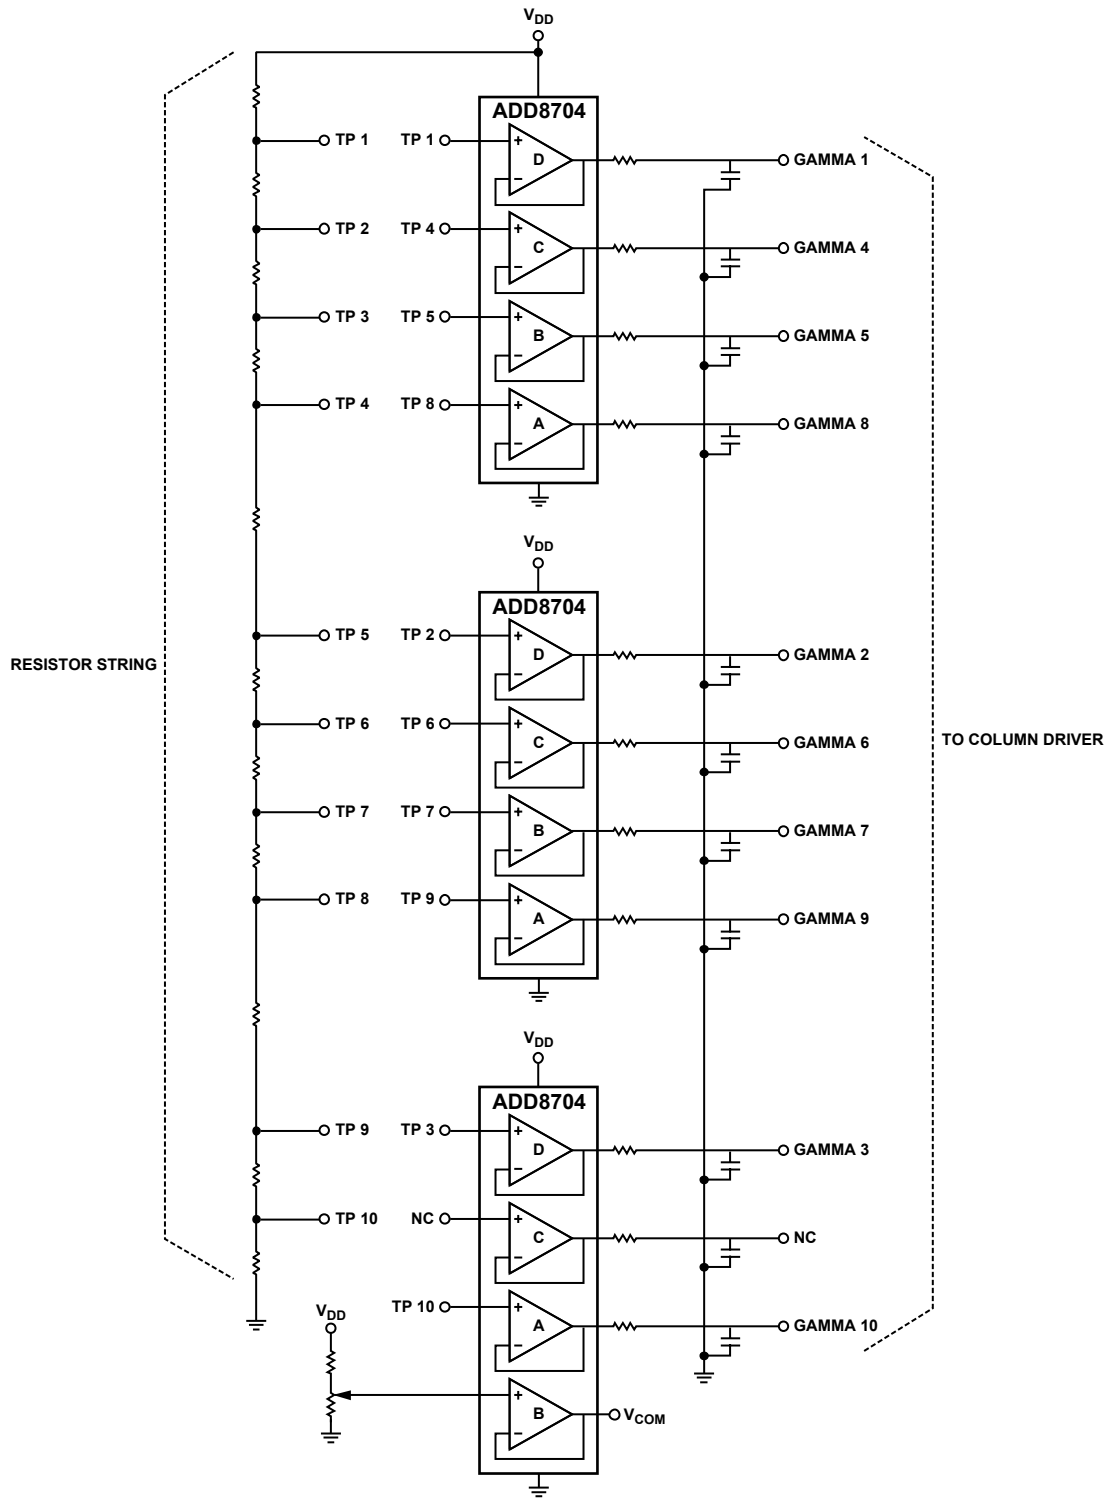


Figure 37. Using Four ADD8704s to Generate 10 Gamma Outputs

OUTLINE DIMENSIONS

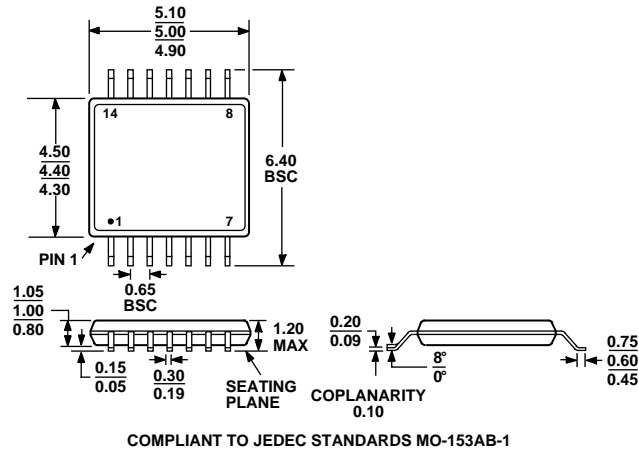


Figure 38. 14-Lead Thin Shrink Small Outline Package [TSSOP] (RU)
Dimensions shown in millimeters

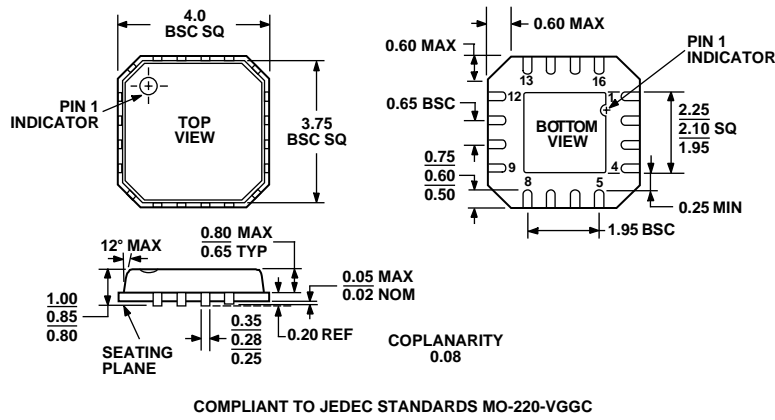


Figure 39. 16-Terminal Leadless Frame Chip Scale Package [LFCSP] (CP)
Dimensions shown in millimeters

ORDERING GUIDE

| Model | Temperature Range | Package Description | Package Option |
|--------------------------------|-------------------|---------------------------------------|----------------|
| ADD8704ARU | -40°C to +85°C | 14-Lead Thin Shrink SOIC | RU-14 |
| ADD8704ARU-REEL | -40°C to +85°C | 14-Lead Thin Shrink SOIC | RU-14 |
| ADD8704ARUZ ¹ | -40°C to +85°C | 14-Lead Thin Shrink SOIC | RU-14 |
| ADD8704ARUZ-REEL ¹ | -40°C to +85°C | 14-Lead Thin Shrink SOIC | RU-14 |
| ADD8704ACPZ-R2 ¹ | -40°C to +85°C | 16-Terminal Leadless Frame Chip Scale | CP-16 |
| ADD8704ACPZ-REEL7 ¹ | -40°C to +85°C | 16-Terminal Leadless Frame Chip Scale | CP-16 |

¹ Z = Pb-free part.

NOTES

ADD8704

NOTES